

Световой барьер безопасности

F3SG-R



- Стабильность настроек благодаря корпусу, устойчивому на кручение
- Простой поиск неисправностей с помощью QR-кода
- Быстрая инсталляция и замена благодаря разъёмам Smart-click

Простой и быстрый монтаж

Световые барьеры предназначены для обеспечения безопасного функционирования оборудования в соответствии со стандартами безопасности, но их установка и обслуживание могут нести новые сложности. Вот почему мы переосмыслили, повторно разработали и спроектировали свою серию F3SG-R, снабдив ее специальными решениями, позволяющими выбрать, устанавливать и обслуживать идеальный световой барьер безопасности с минимальными затратами времени и усилий. Например, для ускорения монтажа теперь используются защелкивающиеся байонетные соединения. А новый, устойчивый к скручиванию корпус позволяет избежать проблем совмещения приемника и передатчика. И это еще не все...

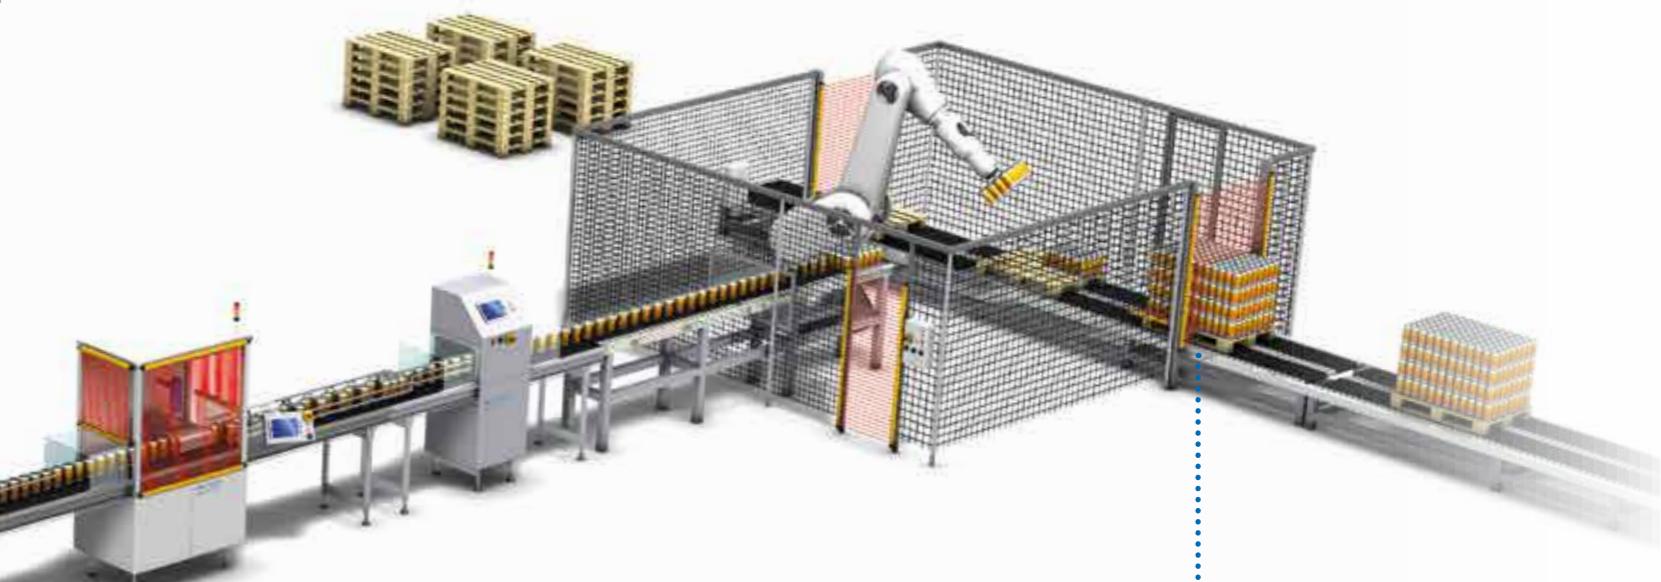
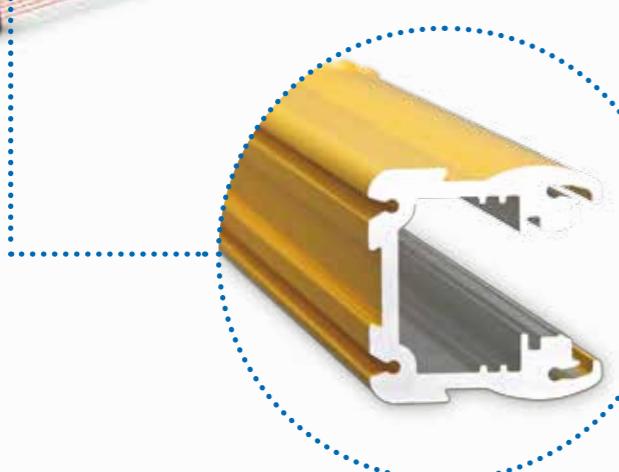
Дополнительные конструктивные особенности

- Исполнение Advanced с функцией селективного пропуска — идеально подходит для гибких производств
- Исполнение Easy для простых задач с логикой ВКЛ./ВЫКЛ.
- В комплектацию входит 100 м кабеля — для гибкого выполнения проводки и ускорения наладки
- Дистанция срабатывания до 20 м обеспечивает интеграцию барьеров в оборудование без каких-либо затруднений
- Оптическая синхронизация упрощает совмещение
- Степень защиты IP67 обеспечивает надежную работу в составе моечных машин или в условиях сильной запыленности воздуха



Устойчивость к скручиванию облегчает совмещение

Конструкция корпуса, обладающая очень высокой жесткостью, позволяет устранить проблемы, связанные с продольным скручиванием. Это позволит вам ускорить и упростить процесс наладки, а также будет препятствовать постепенному смещению оптических осей из-за вибрации.



QR-код упрощает устранение неполадок

Если что-то работает неправильно, просто отсканируйте нанесенный QR-код при помощи смартфона, после чего можно будет перейти непосредственно на веб-страницу с рекомендациями по устранению неисправностей. Техническая поддержка осуществляется на восьми языках: китайский, английский, французский, немецкий, итальянский, японский, корейский и испанский.



Кабельные разъемы Smartclick® ускоряют монтаж

Не требуется контроль момента затяжки: технология Smartclick® позволяет подключать кабели при помощи водонепроницаемых разъемов типа M12, которые фиксируются поворотом на 1/8 оборота. Такие соединения позволяют снизить затраты времени при подключении большого количества устройств.

Конструктивные особенности и преимущества

EASY | ADVANCED

Простота регулировки — даже после установки

Фиксированные монтажные кронштейны, входящие в стандартную комплектацию, позволяют вам перемещать световые барьеры вверх и вниз для осуществления вертикальной регулировки. Регулируемые монтажные кронштейны, поставляемые опционально, позволяют осуществлять как вертикальную, так и горизонтальную регулировку в пределах $\pm 15^\circ$.



EASY | ADVANCED

Выбор разрешения обнаружения


- Имеются два исполнения: защита рук (разрешение 30 мм) и защита пальцев (разрешение 14 мм)
- Дистанция срабатывания в диапазоне от 0,3 м до 20 м
- Высота от 160 мм до 2500 мм



EASY | ADVANCED

Простое совмещение лучей в «два шага»

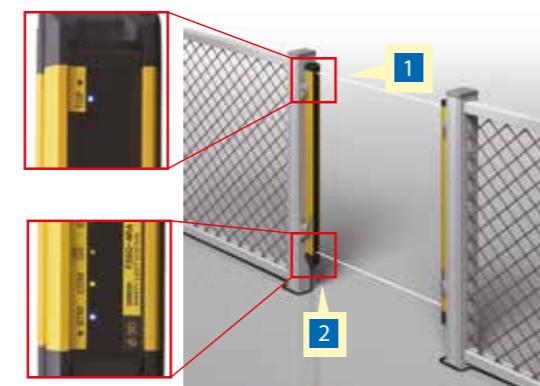
Просто установите световой барьер безопасности на месте и следите, когда верхний и нижний светодиоды загорятся при завершении совмещения.



EASY | ADVANCED

Опциональная дополнительная защита

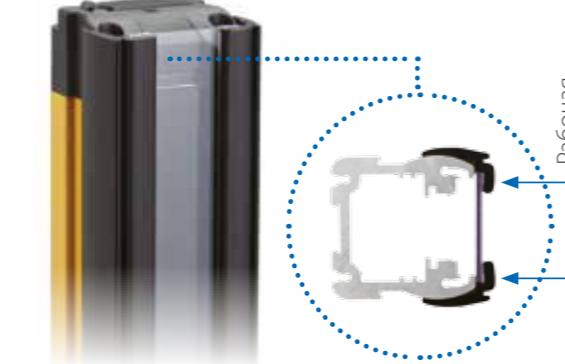Вы можете обеспечить дополнительную защиту поверхности оптических элементов барьеров безопасности, воспользовавшись специальными защитными накладками (F39-HGA и/или F39-HGB), которые будут препятствовать возникновению царапин и прочим механическим воздействиям.



EASY | ADVANCED

Конструкция рассчитана на эксплуатацию в условиях мойки или при сильной запыленности

Световые барьеры безопасности серии F3SGR имеют степень защиты IP67 и могут использоваться в машинах, где проводится мойка оборудования, или в условиях сильной запыленности



EASY | ADVANCED

Автоматическая синхронизация между передатчиком и приемником

Двухэтапная оптическая синхронизация исключает необходимость в электрическом соединении для синхронизации между передатчиком и приемником. Это обеспечивает дополнительную экономию времени. Кроме того, получившаяся схема проводных соединений обеспечивает снижение риска разрыва электрических цепей и исключает воздействие помех.



EASY

Исполнение F3SG-RE Easy для простых задач, где не нужно переплачивать

Мы разработали базовую версию, работающую по принципу ВКЛ/ВЫКЛ, которая идеально подходит для установки в составе несложных систем.

- Самое быстрое время реакции (5 мс) среди всех устройств, имеющихся на рынке, для барьера минимальной высоты.
- Ускорению монтажа способствует снижение объема работ по подключению проводки, которое обеспечивается наличием готовых разъемов.
- Быстрый и простой поиск и устранение неисправностей при помощи QR-кодов
- Хорошо видимые светодиодные индикаторы состояний ВКЛ/ВЫКЛ



Оптимизация безопасности всей производственной линии при помощи световых барьеров F3SG-RA

ADVANCED Функция гашения

F3SG-RA поддерживает функции плавающего и фиксированного гашения. Настройка количества лучей может быть сконфигурирована вручную при помощи программы SD Manager 2 или в режиме, заданном DIP-микропереключателями, посредством помещения объекта в зону обнаружения и выполнения обучения нажатием на кнопку.



ADVANCED Снижение разрешения

При помощи функции пониженного разрешения в барьерах F3SG-RA обеспечивается пропуск прерванных лучей (от 1 до 3 плавающих лучей). Такое переключение позволяет изменить чувствительность светового барьера безопасности и реализовать более гибкую систему безопасности, например, в ситуации, когда объекты перемещаются внутри зоны обнаружения.



ADVANCED Каскадное подключение

Возможно последовательное подключение до трех комплектов F3SG-R. Каскадное подключение позволяет использовать их как единый световой барьер безопасности, причем требуется подключение всего одного комплекта к контроллеру и исключается возникновение взаимных помех. При прерывании одного из последовательно подключенных устройств F3SG-R оба вывода безопасности отключаются.

- Число подключений: до 3 комплектов
- Общее число лучей: до 255 лучей
- Общая суммарная длина кабелей между каскадно подключенными сегментами: макс. 10 м.

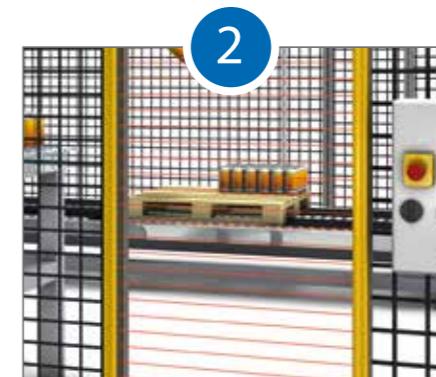
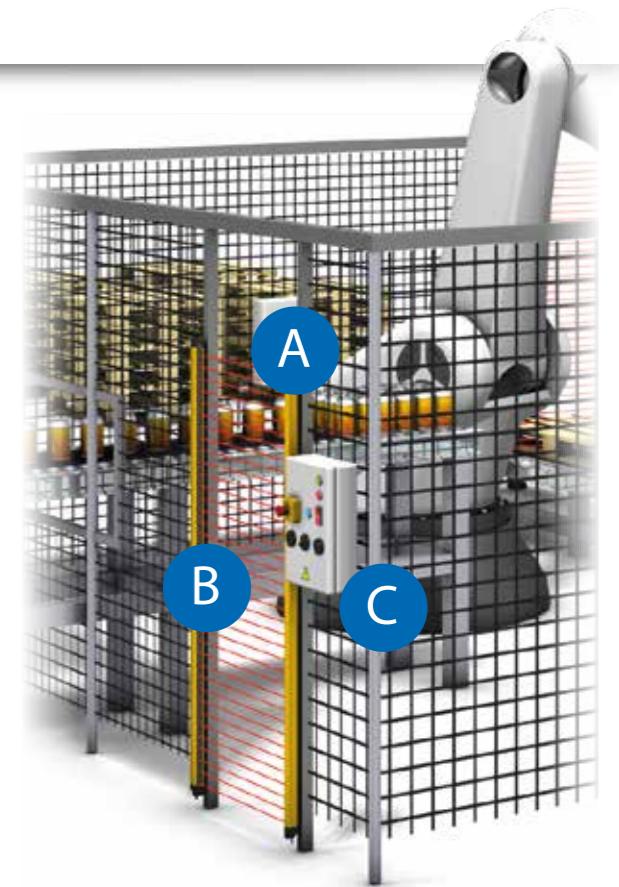
ADVANCED Функция предотвращения перезапуска

Кнопка предотвращения перезапуска предотвращает включение оборудования, когда необнаруженный работник все еще находится в пределах ограждения.

A До перезапуска системы безопасности нужно нажать кнопку предотвращения перезапуска внутри производственной линии

B Световой барьер безопасности для облегчения доступа, например, вилочного погрузчика

C Нажимная кнопка перезапуска для подтверждения и запуска оборудования.



Нажмите кнопку предотвращения перезапуска внутри производственной линии

Выходите из опасной зоны через световой барьер безопасности

Нажмите кнопку перезапуска за пределами опасной зоны

ФУНКЦИЯ СЕЛЕКТИВНОГО ПРОПУСКА В БАРЬЕРАХ F3SG-RA

ADVANCED

Автоматизированные производственные системы могут быть защищены при помощи стационарных ограждений, но в местах входа и выхода материала в опасную зону функция селективного пропуска повышает эффективность, не снижая при этом безопасности оператора.

Полный набор опций селективного пропуска в барьерах безопасности F3SG-RA обеспечивается при помощи стандартных принадлежностей Omron.

Для F3SG-RA предусмотрены 3 различных режима селективного пропуска:

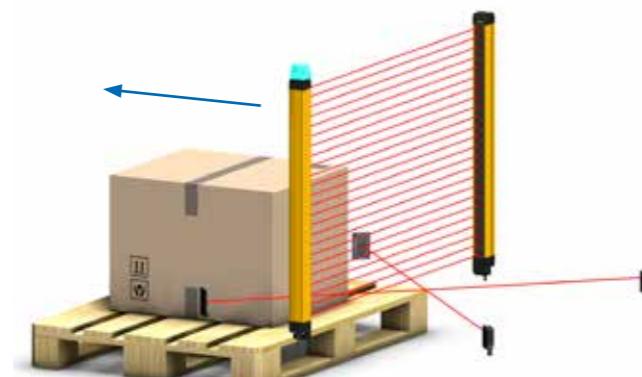
- Стандартный режим селективного пропуска (T-образный и X-образный селективный пропуск)
- Селективный пропуск только на выход (L-образный селективный пропуск)
- Режим определения положения (например, робот останавливается в безопасном положении)

Возможны следующие режимы настройки диапазона селективного пропуска:


- Селективный пропуск по всей высоте защитной зоны
- Частичный селективный пропуск в пределах диапазона
- Динамический селективный пропуск

Динамический селективный пропуск

Когда на одной и той же производственной линии перемещаются изделия разной высоты, функция динамического селективного пропуска обеспечивает автоматическую настройку активности соответствующих лучей, исходя из высоты изделия.




X-образная схема селективного пропуска

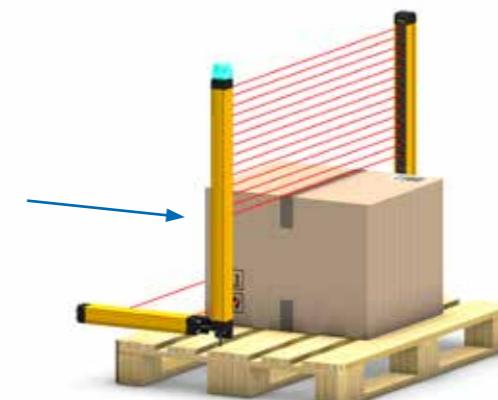

Динамический селективный пропуск, используемый с L-образной схемой

Интеллектуальное устройство активации селективного пропуска

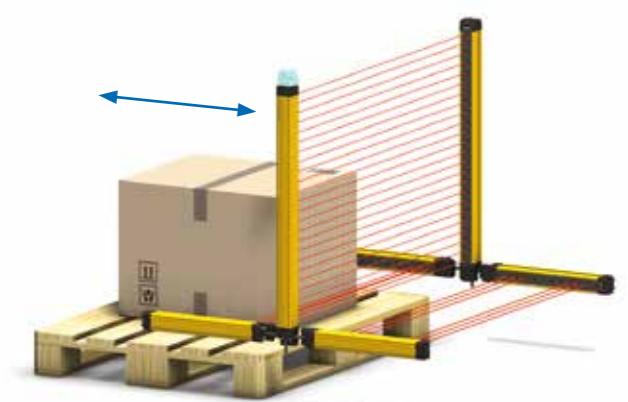Интеллектуальное устройство активации селективного пропуска Smart Muting Actuator расширяет функциональные возможности F3SG-RA в условиях, когда изделие перемещается вперед-назад или между товарами на поддоне есть небольшие просветы.




Использование интеллектуального устройства активации селективного пропуска Smart Muting Actuator при T-образном селективном пропуске

Средство конфигурирования SD Manager2

Минимизация ошибок при конфигураторе и работе

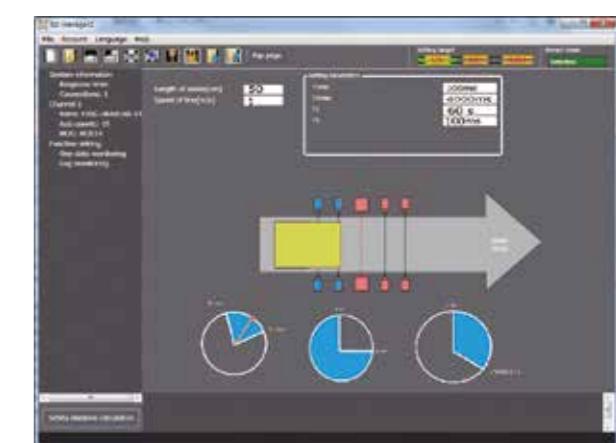Конфигуратор SD Manager2 наглядно отображает расположение элементов и их настройки, что позволяет создать надежную конфигурацию с первого раза. Кроме того, имеется возможность анализа всех остановок в результате ошибок селективного пропуска на основе данных, сохраняемых в F3SG-R, что обеспечивает минимизацию незапланированных простоев оборудования.



Перечень функций

Функция	Исполнение ADVANCED F3SG-RA	Исполнение EASY F3SG-RE	Заводская настройка по умолчанию
Выбор PNP/NPN	●		Выход PNP
Внешняя проверка	●		24 В, функция активна
Блокировка	●	■	Режим автоматического перезапуска
Предотвращение перезапуска	●	■	Отключено
Мониторинг внешних устройств (EDM)	●	■	Отключено
Вспомогательный выход		■	Информация о селективном пропуске/принудительном обходе
Селективный пропуск		■	Стандартный режим селективного пропуска
Принудительный обход		■	Включено
Фиксированное гашение	●	■	Отключено
Плавающее гашение	●	■	Отключено
Снижение разрешения		■	Отключено
Зона предупреждения		■	Отключено
Выбор кодировки сканирования	●		Код А
Выбор рабочего диапазона	●	○	Режим короткой дистанции
Регулировка времени срабатывания		■	Стандартный режим
Лампа		■	Красный цвет: отключено Оранжевый цвет: отключено Зеленый цвет: информация о селективном пропуске/принудительном обходе
Выход указанного луча		■	Отключено

- Задается при помощи DIP-переключателя
- Задается при помощи конфигурирующего ПО
- Задается при помощи проводного соединения

F3SG-RA



Advanced type for complex safety solutions

The F3SG-RA advanced safety light curtain provides simplicity in mounting, daily use and maintenance.

- Torsion-resistant for fast and simple alignment
- Smart-click cable connection for fast set-up and proper torque to ensure IP67
- QR code indication for easy online troubleshooting
- PNP/NPN output selection by DIP switch
- Cascading connection up to 3 segments and up to 255 beams
- Built in blanking, muting and reset functions

Ordering information

Sensors

Application	Type	Detection capability	Operating range	Protective height	Order code
Finger detection	Type 4 / Type 2	14 mm	0.3 to 10 m	160 to 2,080 mm	F3SG-RA__-14
Hand detection	Type 4 / Type 2	30 mm	0.3 to 20 m	190 to 2,510 mm	F3SG-RA__-30

F3SG-RA_14 models (14 mm detection capability)



Protective height	Number of beams	Order code	
		Type 4	Type 2
160 mm	15	F3SG-4RA0160-14	F3SG-2RA0160-14
240 mm	23	F3SG-4RA0240-14	F3SG-2RA0240-14
320 mm	31	F3SG-4RA0320-14	F3SG-2RA0320-14
400 mm	39	F3SG-4RA0400-14	F3SG-2RA0400-14
480 mm	47	F3SG-4RA0480-14	F3SG-2RA0480-14
560 mm	55	F3SG-4RA0560-14	F3SG-2RA0560-14
640 mm	62	F3SG-4RA0640-14	F3SG-2RA0640-14
720 mm	71	F3SG-4RA0720-14	F3SG-2RA0720-14
800 mm	79	F3SG-4RA0800-14	F3SG-2RA0800-14
880 mm	87	F3SG-4RA0880-14	F3SG-2RA0880-14
960 mm	95	F3SG-4RA0960-14	F3SG-2RA0960-14
1040 mm	103	F3SG-4RA1040-14	F3SG-2RA1040-14
1120 mm	111	F3SG-4RA1120-14	F3SG-2RA1120-14
1200 mm	119	F3SG-4RA1200-14	F3SG-2RA1200-14
1280 mm	127	F3SG-4RA1280-14	F3SG-2RA1280-14
1360 mm	135	F3SG-4RA1360-14	F3SG-2RA1360-14
1440 mm	143	F3SG-4RA1440-14	F3SG-2RA1440-14
1520 mm	151	F3SG-4RA1520-14	F3SG-2RA1520-14
1600 mm	159	F3SG-4RA1600-14	F3SG-2RA1600-14
1680 mm	167	F3SG-4RA1680-14	F3SG-2RA1680-14
1760 mm	175	F3SG-4RA1760-14	F3SG-2RA1760-14
1840 mm	183	F3SG-4RA1840-14	F3SG-2RA1840-14
1920 mm	191	F3SG-4RA1920-14	F3SG-2RA1920-14
2000 mm	199	F3SG-4RA2000-14	F3SG-2RA2000-14
2080 mm	207	F3SG-4RA2080-14	F3SG-2RA2080-14

F3SG-RA_30 models (30 mm detection capability)







Protective height	Number of beams	Order code	
		Type 4	Type 2
190 mm	8	F3SG-4RA0190-30	F3SG-2RA0190-30
270 mm	12	F3SG-4RA0270-30	F3SG-2RA0270-30
350 mm	16	F3SG-4RA0350-30	F3SG-2RA0350-30
430 mm	20	F3SG-4RA0430-30	F3SG-2RA0430-30
510 mm	24	F3SG-4RA0510-30	F3SG-2RA0510-30
590 mm	28	F3SG-4RA0590-30	F3SG-2RA0590-30
670 mm	32	F3SG-4RA0670-30	F3SG-2RA0670-30
750 mm	36	F3SG-4RA0750-30	F3SG-2RA0750-30
830 mm	40	F3SG-4RA0830-30	F3SG-2RA0830-30
910 mm	44	F3SG-4RA0910-30	F3SG-2RA0910-30
990 mm	48	F3SG-4RA0990-30	F3SG-2RA0990-30
1070 mm	52	F3SG-4RA1070-30	F3SG-2RA1070-30
1150 mm	56	F3SG-4RA1150-30	F3SG-2RA1150-30
1230 mm	60	F3SG-4RA1230-30	F3SG-2RA1230-30
1310 mm	64	F3SG-4RA1310-30	F3SG-2RA1310-30
1390 mm	68	F3SG-4RA1390-30	F3SG-2RA1390-30
1470 mm	72	F3SG-4RA1470-30	F3SG-2RA1470-30
1550 mm	76	F3SG-4RA1550-30	F3SG-2RA1550-30
1630 mm	80	F3SG-4RA1630-30	F3SG-2RA1630-30
1710 mm	84	F3SG-4RA1710-30	F3SG-2RA1710-30
1790 mm	88	F3SG-4RA1790-30	F3SG-2RA1790-30
1870 mm	92	F3SG-4RA1870-30	F3SG-2RA1870-30
1950 mm	96	F3SG-4RA1950-30	F3SG-2RA1950-30
2030 mm	100	F3SG-4RA2030-30	F3SG-2RA2030-30
2110 mm	104	F3SG-4RA2110-30	F3SG-2RA2110-30
2190 mm	108	F3SG-4RA2190-30	F3SG-2RA2190-30
2270 mm	112	F3SG-4RA2270-30	F3SG-2RA2270-30
2350 mm	116	F3SG-4RA2350-30	F3SG-2RA2350-30
2420 mm	120	F3SG-4RA2430-30	F3SG-2RA2430-30
2510 mm	124	F3SG-4RA2510-30	F3SG-2RA2510-30

Accessories (Sold separately)

Single-end connector cable

Appearance	Type	Specification	Cable length	Order code																								
	Emitter cable M12 connector 5-Pin Color: Gray	 Female <table border="1"> <tr><td>1</td><td>+ 24 VDC</td><td>Brown</td></tr> <tr><td>2</td><td>TEST</td><td>Black</td></tr> <tr><td>3</td><td>0 VDC</td><td>Blue</td></tr> <tr><td>4</td><td>Not used</td><td>White</td></tr> <tr><td>5</td><td>Not used</td><td>Yellow</td></tr> </table>	1	+ 24 VDC	Brown	2	TEST	Black	3	0 VDC	Blue	4	Not used	White	5	Not used	Yellow	3 m 7m 10 m 15 m 20 m	F39-JG3A-L F39-JG7A-L F39-JG10A-L F39-JG15A-L F39-JG20A-L									
1	+ 24 VDC	Brown																										
2	TEST	Black																										
3	0 VDC	Blue																										
4	Not used	White																										
5	Not used	Yellow																										
	Receiver cable M12 connector 8-Pin Color: Black	 Female <table border="1"> <tr><td>1</td><td>Reset</td><td>Yellow</td></tr> <tr><td>2</td><td>+ 24 VDC</td><td>Brown</td></tr> <tr><td>3</td><td>MUTE A</td><td>Gray</td></tr> <tr><td>4</td><td>MUTE B</td><td>Pink</td></tr> <tr><td>5</td><td>OSSD 1</td><td>Black</td></tr> <tr><td>6</td><td>OSSD 2</td><td>White</td></tr> <tr><td>7</td><td>0 VDC</td><td>Blue</td></tr> <tr><td>8</td><td>AUX(Lamp)</td><td>Red</td></tr> </table>	1	Reset	Yellow	2	+ 24 VDC	Brown	3	MUTE A	Gray	4	MUTE B	Pink	5	OSSD 1	Black	6	OSSD 2	White	7	0 VDC	Blue	8	AUX(Lamp)	Red	3 m 7m 10 m 15 m 20 m	F39-JG3A-D F39-JG7A-D F39-JG10A-D F39-JG15A-D F39-JG20A-D
1	Reset	Yellow																										
2	+ 24 VDC	Brown																										
3	MUTE A	Gray																										
4	MUTE B	Pink																										
5	OSSD 1	Black																										
6	OSSD 2	White																										
7	0 VDC	Blue																										
8	AUX(Lamp)	Red																										


Double-end connector cable

Appearance	Type	Specification	Cable length	Order code																
	Emitter cable M12 connector 5-Pin Color: Gray	 Connected to power cable or double-ended cable  Female  Male <table border="1"> <tr><td>1 Brown</td><td>1 Brown</td></tr> <tr><td>3 Blue</td><td>3 Blue</td></tr> <tr><td>2 Black</td><td>2 Black</td></tr> <tr><td>4 White</td><td>4 White</td></tr> <tr><td>5 Yellow</td><td>5 Yellow</td></tr> </table>	1 Brown	1 Brown	3 Blue	3 Blue	2 Black	2 Black	4 White	4 White	5 Yellow	5 Yellow	0.5 m 1 m 3 m 5 m 7m 10 m 15 m 20 m	F39-JGR5B-L F39-JG1B-L F39-JG3B-L F39-JG5B-L F39-JG7B-L F39-JG10B-L F39-JG15B-L F39-JG20B-L						
1 Brown	1 Brown																			
3 Blue	3 Blue																			
2 Black	2 Black																			
4 White	4 White																			
5 Yellow	5 Yellow																			
	Receiver cable M12 connector 8-Pin Color: Black	 Connected to power cable or double-ended cable  Female  Male <table border="1"> <tr><td>2 Brown</td><td>2 Brown</td></tr> <tr><td>7 Blue</td><td>7 Blue</td></tr> <tr><td>5 Black</td><td>5 Black</td></tr> <tr><td>6 White</td><td>6 White</td></tr> <tr><td>1 Yellow</td><td>1 Yellow</td></tr> <tr><td>8 Red</td><td>8 Red</td></tr> <tr><td>3 Gray</td><td>3 Gray</td></tr> <tr><td>4 Pink</td><td>4 Pink</td></tr> </table>	2 Brown	2 Brown	7 Blue	7 Blue	5 Black	5 Black	6 White	6 White	1 Yellow	1 Yellow	8 Red	8 Red	3 Gray	3 Gray	4 Pink	4 Pink	0.5 m 1 m 3 m 5 m 7m 10 m 15 m 20 m	F39-JGR5B-D F39-JG1B-D F39-JG3B-D F39-JG5B-D F39-JG7B-D F39-JG10B-D F39-JG15B-D F39-JG20B-D
2 Brown	2 Brown																			
7 Blue	7 Blue																			
5 Black	5 Black																			
6 White	6 White																			
1 Yellow	1 Yellow																			
8 Red	8 Red																			
3 Gray	3 Gray																			
4 Pink	4 Pink																			

Y-joint Plug/Socket Connector

Appearance	Type	Specification	Cable length	Order code
	M12 connectors. Used for reduced wiring.	 F3SG-RA Emitter F3SG-RA Receiver Y-Joint Plug/Socket Connector for Advance F39-GCNY2 Double-ended cable F39-JG_B-L(Gray) Single-ended connector cable F39-JG_A-D(Black)	0.5 m	F39-GCNY2

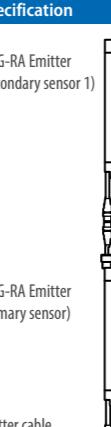Cascading cable

Appearance	Type	Specification	Cable length	Order code
	Cascading cable set Set including: Emitter cable: Cap (5-pin), M12 connector (5-pin) Receiver cable: Cap (8-pin), M12 connector (8-pin)	 F3SG-RA Emitter (Secondary sensor 1) F3SG-RA Receiver (Secondary Sensor 1) Cascading cable set F39-JGR2W F3SG-RA Emitter (Primary sensor) F3SG-RA Receiver (Primary sensor) Emitter cable F39-JG__L Receiver cable F39-JG__D	0.2 m	F39-JGR2W

Mounting brackets

Appearance	Type	Specification	Order code
	Standard fixed bracket set (Two brackets per set)	Bracket to mount the F3SG-R. Side mounting and backside mounting possible. (Included in the F3SG-R product package *)	F39-LGF
	Standard adjustable bracket set (Two brackets per set)	Bracket to mount the F3SG-R. Beam alignment after mounting possible. The angle adjustment range is ±15°. Side mounting and backside mounting possible.	F39-LGA

*1 F3SG-RA____-14: Protective height of 0160 to 1200: 2 sets, protective height of 1280 to 2080: 3 sets
F3SG-RA____-30: Protective height of 0190 to 1230: 2 sets, protective height of 1310 to 2270: 3 sets, protective height of 2350 to 2510: 4 sets

Interface units and configuration tool SD Manager 2

Appearance	Type	Specification	Order code
	SD Manager2	The configuration tool SD Manager2 is available to download from our website at http://www.ia.omron.com/f3sg_r_tool . To change the settings of the F3SG-RA using SD Manager 2, it is necessary to set the receiver's two DIP switches No. 8 to ON.	-
	Interface unit	F39-GIF interface unit to connect the F3SG-RA receiver to a USB port of the PC	F39-GIF

Lamp

Appearance	Type	Specification	Order code
	Lamp unit	The lamp can be connected to a receiver and turned ON based on the operation of F3SG-RA. The lamp can indicate red, orange, and green colors, to which three different states can be assigned.	F39-LP

Test rod

Appearance	Type	Specification	Order code
	Test rod 14mm	14 mm diameter	F39-TRD14
	Test rod 30mm	30 mm diameter	F39-TRD30

Spatter protection cover (Two covers per set, for emitter and receiver)

Spatter protection covers include mounting brackets.

For safety light curtain models of the protective height of 2,000 mm or longer, use two spatter protection covers of different lengths.

Appearance	Safety light curtain model		Order code
	Finger protection	Hand and arm protection	
	F3SG_RA0160-14	F3SG_RA0190-30	F39-HGA0200
	F3SG_RA0240-14	F3SG_RA0270-30	F39-HGA0280
	F3SG_RA0320-14	F3SG_RA0350-30	F39-HGA0360
	F3SG_RA0400-14	F3SG_RA0430-30	F39-HGA0440
	F3SG_RA0480-14	F3SG_RA0510-30	F39-HGA0520
	F3SG_RA0560-14	F3SG_RA0590-30	F39-HGA0600
	F3SG_RA0640-14	F3SG_RA0670-30	F39-HGA0680
	F3SG_RA0720-14	F3SG_RA0750-30	F39-HGA0760
	F3SG_RA0800-14	F3SG_RA0830-30	F39-HGA0840
	F3SG_RA0880-14	F3SG_RA0910-30	F39-HGA0920
	F3SG_RA0960-14	F3SG_RA0990-30	F39-HGA1000
	F3SG_RA1040-14	F3SG_RA1070-30	F39-HGA1080
	F3SG_RA1120-14	F3SG_RA1150-30	F39-HGA1160
	F3SG_RA1200-14	F3SG_RA1230-30	F39-HGA1240
	F3SG_RA1280-14	F3SG_RA1310-30	F39-HGA1320
	F3SG_RA1360-14	F3SG_RA1390-30	F39-HGA1400
	F3SG_RA1440-14	F3SG_RA1470-30	F39-HGA1480
	F3SG_RA1520-14	F3SG_RA1550-30	F39-HGA1560
	F3SG_RA1600-14	F3SG_RA1630-30	F39-HGA1640
	F3SG_RA1680-14	F3SG_RA1710-30	F39-HGA1720
	F3SG_RA1760-14	F3SG_RA1790-30	F39-HGA1800
	F3SG_RA1840-14	F3SG_RA1870-30	F39-HGA1880
	F3SG_RA1920-14	F3SG_RA1950-30	F39-HGA1960
	F3SG_RA2000-14	F3SG_RA2030-30	F39-HGA1480 F39-HGA0550
	F3SG_RA2080-14	F3SG_RA2110-30	F39-HGA1560 F39-HGA0550
-		F3SG_RA2190-30	F39-HGA1640 F39-HGA0550
-		F3SG_RA2270-30	F39-HGA1720 F39-HGA0550
-		F3SG_RA2350-30	F39-HGA1800 F39-HGA0550
-		F3SG_RA2430-30	F39-HGA1880 F39-HGA0550
-		F3SG_RA2510-30	F39-HGA1960 F39-HGA0550

Note: The operating range of the safety light curtain attached with the product is 10% shorter than the rating.

Spare parts

Appearance	Type	Specification	Order code
	End cap	Housing color: Black For both emitter and receiver (Attached to the F3SG-R. The end cap can be purchased if lost.)	F39-CNMG

F3SG-RA


Specifications

Item		F3SG-4RA -14 F3SG-2RA -14	F3SG-4RA -30 F3SG-2RA -30
Type of ESPE (IEC 61496-1)	Type 4	F3SG-4RA -14/-30	
	Type 2	F3SG-2RA -14/-30	
Detection capability (Opaque objects)		14 mm dia.	30 mm dia.
Protective height		160 to 2080 mm	190 to 2510 mm
Operating range (Dip switch option)		0.3 to 3.0 m or 0.3 to 10.0 m	0.3 to 7.0 m or 0.3 to 20.0 m
Effective aperture angle (EAA) (IEC 61496-2)	Type 4	±2.5° max., emitter and receiver at operating range of 3 m or greater	
	Type 2	±5.0° max., emitter and receiver at operating range of 3 m or greater	
Light source		Infrared LEDs, Wavelength: 870 nm	
Power supply voltage (Vs)		SELV/PELV 24 VDC ±20% (ripple p-p 10% max.)	
Safety outputs (OSSD)		2 PNP or NPN transistor outputs (PNP or NPN selectable by DIP switch), load current of 300 mA max.	
Cascade connection		Number of cascaded segments: 3 max., total number of beams: 255 max. Total sum of cable lengths between sensors: 10 m max.	
Test function		Self-test (at power-on, and during operation), External test (light emission stop function by test input)	
Safety-related functions		Interlock, pre-reset, external device monitoring (EDM), fixed blanking/floating blanking, reduced resolution, muting/override, scan code selection, PNP/NPN selection, response time adjustment	
Response time		ON to OFF (normal mode): 8 to 18 ms max., OFF to ON: 40 to 90 ms max.	
Ambient temperature	Operating	-10 to 55°C (non-icing)	
	Storage	-25 to 70°C	
Ambient humidity	Operating	35% to 85% (non-condensing)	
	Storage	35% to 95%	
Degree of protection (IEC 60529)		IP65 and IP67	
Material		Housing: Aluminum, Cap: PBT, Front window: PMMA, Cable: Oil resistant PVC, Mounting bracket: ZDC2, FE plate: SUS	
Performance level (PL)/ Safety category	Type 4	PLe/Category 4 (EN ISO 13849-1:2008)	
	Type 2	PLc/Category 2 (EN ISO 13849-1:2008)	
PFHd		$\leq 9.9 \times 10^{-8}$ (IEC 61508)	
Proof test interval T_M		Every 20 years (IEC 61508)	

Note: For more information, please check the user manual Z352-E1

Connections (Basic wiring diagram)

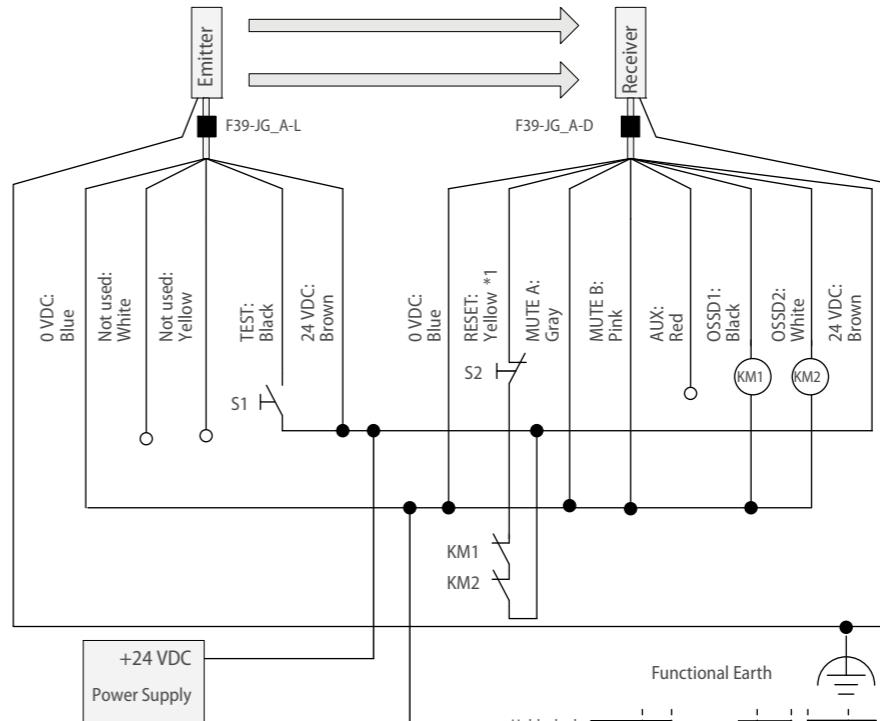
Standalone F3SG-RA using PNP outputs



[DIP Switch settings]*2

- Manual Reset Mode
 - EDM enabled
 - PNP output

Emitter:
- 24 V Active



Test Switch
Lockout/Interlock Reset Switch
12: Safety relay with forcibly guided contacts (G7SA) or magnetic contactor
3-phase motor

used as EDM input line

functions are configurable with Switch.



Easy type for simple ON/OFF detection applications

The F3SG-RE easy safety light provides simplicity in mounting, daily use and maintenance.

- Torsion-resistant for fast and simple alignment
- Smart-click cable connection for fast set-up and proper torque to ensure IP67
- QR code indication for easy online troubleshooting

Ordering information

Sensors

Application	Type	Detection capability	Operating range	Protective height	Order code
Finger detection	Type 4 / Type 2	14 mm	0.3 to 10 m	160 to 2,080 mm	F3SG-RE____-14
Hand detection	Type 4 / Type 2	30 mm	0.3 to 20 m	190 to 2,510 mm	F3SG-RE____-30

F3SG-RE_P14 models (PNP and 14 mm detection capability)

Protective height	Number of beams	Order code	
		Type 4	Type 2
160 mm	15	F3SG-4RE0160P14	F3SG-2RE0160P14
240 mm	23	F3SG-4RE0240P14	F3SG-2RE0240P14
320 mm	31	F3SG-4RE0320P14	F3SG-2RE0320P14
400 mm	39	F3SG-4RE0400P14	F3SG-2RE0400P14
480 mm	47	F3SG-4RE0480P14	F3SG-2RE0480P14
560 mm	55	F3SG-4RE0560P14	F3SG-2RE0560P14
640 mm	62	F3SG-4RE0640P14	F3SG-2RE0640P14
720 mm	71	F3SG-4RE0720P14	F3SG-2RE0720P14
800 mm	79	F3SG-4RE0800P14	F3SG-2RE0800P14
880 mm	87	F3SG-4RE0880P14	F3SG-2RE0880P14
960 mm	95	F3SG-4RE0960P14	F3SG-2RE0960P14
1040 mm	103	F3SG-4RE1040P14	F3SG-2RE1040P14
1120 mm	111	F3SG-4RE1120P14	F3SG-2RE1120P14
1200 mm	119	F3SG-4RE1200P14	F3SG-2RE1200P14
1280 mm	127	F3SG-4RE1280P14	F3SG-2RE1280P14
1360 mm	135	F3SG-4RE1360P14	F3SG-2RE1360P14
1440 mm	143	F3SG-4RE1440P14	F3SG-2RE1440P14
1520 mm	151	F3SG-4RE1520P14	F3SG-2RE1520P14
1600 mm	159	F3SG-4RE1600P14	F3SG-2RE1600P14
1680 mm	167	F3SG-4RE1680P14	F3SG-2RE1680P14
1760 mm	175	F3SG-4RE1760P14	F3SG-2RE1760P14
1840 mm	183	F3SG-4RE1840P14	F3SG-2RE1840P14
1920 mm	191	F3SG-4RE1920P14	F3SG-2RE1920P14
2000 mm	199	F3SG-4RE2000P14	F3SG-2RE2000P14
2080 mm	207	F3SG-4RE2080P14	F3SG-2RE2080P14

Note: Optional NPN models are available for the F3SG-RE easy types. Please contact your OMRON representative.

Accessories (Sold separately)

Single-end connector cable

Appearance	Type	Specification	Cable length	Order code
	Emitter/receiver cable M12 connector 4-Pin Color: Gray		1 m	X55F-D421-C80-F
			2m	X55F-D421-D80-F
			3 m	X55F-D421-E80-F
			5 m	X55F-D421-G80-F
			10 m	X55F-D421-J80-F

Double-end connector cable

Appearance	Type	Specification	Cable length	Order code
	Emitter/receiver cable M12 connector 4-Pin Color: Gray		1 m	X55W-D421-C81-F
			2m	X55W-D421-D81-F
			3 m	X55W-D421-E81-F
			5 m	X55W-D421-G81-F
			10 m	X55W-D421-J81-F

Y-joint Plug/Socket Connector

Appearance	Type	Specification	Cable length	Order code
	M12 connector (4-pin) on both ends		0.5 m	F39-GCN1

Mounting brackets

Appearance	Type	Specification	Order code
	Standard fixed bracket set (Two brackets per set)	Bracket to mount the F3SG-R. Side mounting and backside mounting possible. (Included in the F3SG-R product package *)	F39-LGF
	Standard adjustable bracket set (Two brackets per set)	Bracket to mount the F3SG-R. Beam alignment after mounting possible. The angle adjustment range is ±15°. Side mounting and backside mounting possible.	F39-LGA

*1 F3SG-RE____-14: Protective height of 0160 to 1200: 2 sets, Protective height of 1280 to 2080: 3 sets
F3SG-RE____-30: Protective height of 0190 to 1230: 2 sets, Protective height of 1310 to 2270: 3 sets, Protective height of 2350 to 2510: 4 sets

Test rod

Appearance	Type	Specification	Order code
	Test rod 14mm	14 mm diameter	F39-TRD14
	Test rod 30mm	30 mm diameter	F39-TRD30

Spatter protection cover (Two covers per set, for emitter and receiver)

Spatter protection covers include mounting brackets.

For safety light curtain models of the protective height of 2,000 mm or longer, use two spatter protection covers of different lengths.

Appearance	Safety light curtain model	Order code
	Finger protection	Hand and arm protection
	F3SG-RE0160-14	F3SG-RE0190-30 F39-HGB0180
	F3SG-RE0240-14	F3SG-RE0270-30 F39-HGB0260
	F3SG-RE0320-14	F3SG-RE0350-30 F39-HGB0340
	F3SG-RE0400-14	F3SG-RE0430-30 F39-HGB0420
	F3SG-RE0480-14	F3SG-RE0510-30 F39-HGB0500
	F3SG-RE0560-14	F3SG-RE0590-30 F39-HGB0580
	F3SG-RE0640-14	F3SG-RE0670-30 F39-HGB0660
	F3SG-RE0720-14	F3SG-RE0750-30 F39-HGB0740
	F3SG-RE0800-14	F3SG-RE0830-30 F39-HGB0820
	F3SG-RE0880-14	F3SG-RE0910-30 F39-HGB0900
	F3SG-RE0960-14	F3SG-RE0990-30 F39-HGB0980
	F3SG-RE1040-14	F3SG-RE1070-30 F39-HGB1060
	F3SG-RE1120-14	F3SG-RE1150-30 F39-HGB1140
	F3SG-RE1200-14	F3SG-RE1230-30 F39-HGB1220
	F3SG-RE1280-14	F3SG-RE1310-30 F39-HGB1300
	F3SG-RE1360-14	F3SG-RE1390-30 F39-HGB1380
	F3SG-RE1440-14	F3SG-RE1470-30 F39-HGB1460
	F3SG-RE1520-14	F3SG-RE1550-30 F39-HGB1540
	F3SG-RE1600-14	F3SG-RE1630-30 F39-HGB1620
	F3SG-RE1680-14	F3SG-RE1710-30 F39-HGB1700
	F3SG-RE1760-14	F3SG-RE1790-30 F39-HGB1780
	F3SG-RE1840-14	F3SG-RE1870-30 F39-HGB1860
	F3SG-RE1920-14	F3SG-RE1950-30 F39-HGB1940
	F3SG-RE2000-14	F3SG-RE2030-30 F39-HGB1460 F39-HGA0550
	F3SG-RE2080-14	F3SG-RE2110-30 F39-HGB1540 F39-HGA0550
		F3SG-RE2190-30 F39-HGB1620 F39-HGA0550
		F3SG-RE2270-30 F39-HGB1700 F39-HGA0550
		F3SG-RE2350-30 F39-HGB1780 F39-HGA0550
		F3SG-RE2430-30 F39-HGB1860 F39-HGA0550
		F3SG-RE2510-30 F39-HGB1940 F39-HGA0550




Specifications

Item	F3SG-4RE -14	F3SG-4RE -30
Type of ESPE (IEC 61496-1)	Type 4 F3SG-4RE -14/30 Type 2 F3SG-2RE -14/30	F3SG-2RE -30
Detection capability (Opaque objects)	14 mm dia.	30-mm dia.
Protective height	160 to 2080 mm	190 to 2510 mm
Operating range (Wiring connection option)	0.3 to 3.0 m or 0.3 to 10.0 m	0.3 to 7.0 m or 0.3 to 20.0 m
Effective aperture angle (EAA) (IEC 61496-2)	Type 4 ±2.5° max., emitter and receiver at operating range of 3 m or greater Type 2 ±5.0° max., emitter and receiver at operating range of 3 m or greater	
Light source	Infrared LEDs, Wavelength: 870 nm	
Power supply voltage (Vs)	SELV/PELV 24 VDC±20% (ripple p-p 10% max.)	
Safety outputs (OSSD)	F3SG-RE P : 2 PNP transistor outputs, load current of 300 mA max. F3SG-RE N : 2 NPN transistor outputs, load current of 300 mA max.	
Test function	Self-test (at power-on, and during operation)	
Response time	ON to OFF (normal mode): 5 to 15ms, OFF to ON: 25 to 75ms	
Ambient temperature	Operating: -10 to 55°C (non-icing) Storage: -25 to 70°C	
Ambient humidity	Operating: 35% to 85% (non-condensing) Storage: 35% to 95%	
Degree of protection (IEC 60529)	IP65 and IP67	
Material	Housing: Aluminum, Cap: PBT, Front window: PMMA, Cable: Oil resistant PVC, Mounting bracket: ZDC2, FE plate: SUS	
Performance level (PL)/Safety category	Type 4 PLe/Category 4 (EN ISO 13849-1:2008) Type 2 PLc/Category 2 (EN ISO 13849-1:2008)	
PFHd	$\leq 9.9 \times 10^{-8}$ (IEC 61508)	
Proof test interval T _M	Every 20 years (IEC 61508)	


Note: For more information, please check the user manual Z352-E1

Connections (Basic wiring diagram)

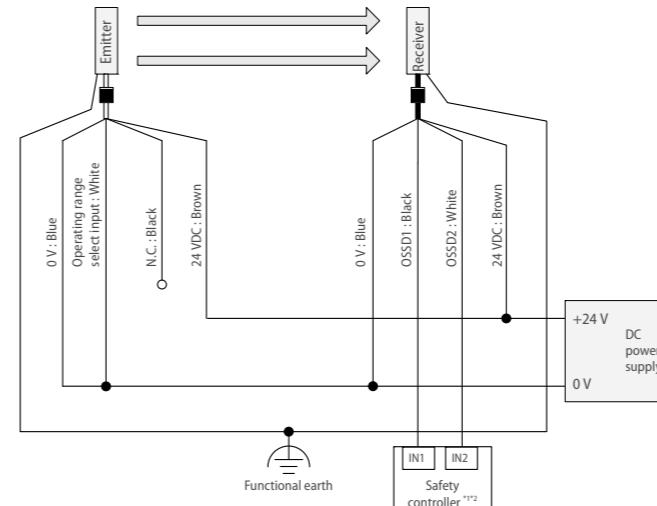Short mode



Long mode

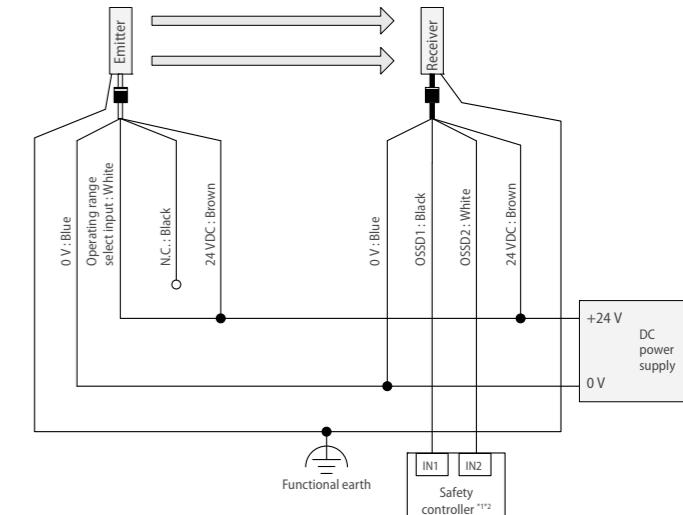^{*1} Refer to user's manual Z352-E1 for more information.^{*2} The safety controller and the F3SG-R must share the power supply or be connected to the common terminal of the power supply.



Smart muting actuator for muting applications

The F3W-MA smart muting actuator is an integrated sensor system utilizing multiple-beam sensor technology to configure muting systems in combination with the safety light curtain.



- Point-to-point detection mode for workpieces with constant shape
- Chattering/void space prevention mode to prevent impact of small object holes

Ordering information





Application	Type	Specification	Order code
	Smart muting actuator for small objects detection	100 mm beam gap between muting trigger beams	F3W-MA010P
	Smart muting actuator for objects detection	300 mm beam gap between muting trigger beams	F3W-MA030P

Accessories (Sold separately)



Single-end connector cable

Appearance	Type	Specification	Cable length	Order code																								
	Emitter cable M12 connector 5-Pin Color: Gray	 <table border="1"> <tr><td>1</td><td>+ 24 VDC</td><td>Brown</td></tr> <tr><td>2</td><td>TEST</td><td>Black</td></tr> <tr><td>3</td><td>0 VDC</td><td>Blue</td></tr> <tr><td>4</td><td>Not used</td><td>White</td></tr> <tr><td>5</td><td>Not used</td><td>Yellow</td></tr> </table>	1	+ 24 VDC	Brown	2	TEST	Black	3	0 VDC	Blue	4	Not used	White	5	Not used	Yellow	3 m	F39-JG3A-L									
	1	+ 24 VDC	Brown																									
	2	TEST	Black																									
	3	0 VDC	Blue																									
	4	Not used	White																									
	5	Not used	Yellow																									
				7m	F39-JG7A-L																							
				10 m	F39-JG10A-L																							
				15 m	F39-JG15A-L																							
				20 m	F39-JG20A-L																							
	Receiver cable M12 connector 8-Pin Color: Black	 <table border="1"> <tr><td>1</td><td>Reset</td><td>Yellow</td></tr> <tr><td>2</td><td>+ 24 VDC</td><td>Brown</td></tr> <tr><td>3</td><td>MUTE A</td><td>Gray</td></tr> <tr><td>4</td><td>MUTE B</td><td>Pink</td></tr> <tr><td>5</td><td>OSSD 1</td><td>Black</td></tr> <tr><td>6</td><td>OSSD 2</td><td>White</td></tr> <tr><td>7</td><td>0 VDC</td><td>Blue</td></tr> <tr><td>8</td><td>AUX(Lamp)</td><td>Red</td></tr> </table>	1	Reset	Yellow	2	+ 24 VDC	Brown	3	MUTE A	Gray	4	MUTE B	Pink	5	OSSD 1	Black	6	OSSD 2	White	7	0 VDC	Blue	8	AUX(Lamp)	Red	3 m	F39-JG3A-D
1	Reset	Yellow																										
2	+ 24 VDC	Brown																										
3	MUTE A	Gray																										
4	MUTE B	Pink																										
5	OSSD 1	Black																										
6	OSSD 2	White																										
7	0 VDC	Blue																										
8	AUX(Lamp)	Red																										
			7m	F39-JG7A-D																								
			10 m	F39-JG10A-D																								
			15 m	F39-JG15A-D																								
			20 m	F39-JG20A-D																								

Double-end connector cable

Appearance	Type	Specification	Cable length	Order code																																																
	Emitter cable M12 connector 5-Pin Color: Gray	 <table border="1"> <tr><td>1</td><td>Brown</td><td>Brown</td></tr> <tr><td>3</td><td>Blue</td><td>Blue</td></tr> <tr><td>2</td><td>Black</td><td>Black</td></tr> <tr><td>4</td><td>White</td><td>White</td></tr> <tr><td>5</td><td>Yellow</td><td>Yellow</td></tr> </table>  <table border="1"> <tr><td>1</td><td>Brown</td><td>Brown</td></tr> <tr><td>3</td><td>Blue</td><td>Blue</td></tr> <tr><td>2</td><td>Black</td><td>Black</td></tr> <tr><td>4</td><td>White</td><td>White</td></tr> <tr><td>5</td><td>Yellow</td><td>Yellow</td></tr> </table>	1	Brown	Brown	3	Blue	Blue	2	Black	Black	4	White	White	5	Yellow	Yellow	1	Brown	Brown	3	Blue	Blue	2	Black	Black	4	White	White	5	Yellow	Yellow	0.5 m	F39-JGR5B-L																		
	1	Brown	Brown																																																	
	3	Blue	Blue																																																	
	2	Black	Black																																																	
	4	White	White																																																	
	5	Yellow	Yellow																																																	
	1	Brown	Brown																																																	
	3	Blue	Blue																																																	
	2	Black	Black																																																	
	4	White	White																																																	
5	Yellow	Yellow																																																		
			1 m	F39-JG1B-L																																																
			3 m	F39-JG3B-L																																																
			5 m	F39-JG5B-L																																																
			7 m	F39-JG7B-L																																																
			10 m	F39-JG10B-L																																																
			15 m	F39-JG15B-L																																																
			20 m	F39-JG20B-L																																																
	Receiver cable M12 connector 8-Pin Color: Black	 <table border="1"> <tr><td>2</td><td>Brown</td><td>Brown</td></tr> <tr><td>7</td><td>Blue</td><td>Blue</td></tr> <tr><td>5</td><td>Black</td><td>Black</td></tr> <tr><td>6</td><td>White</td><td>White</td></tr> <tr><td>1</td><td>Yellow</td><td>Yellow</td></tr> <tr><td>8</td><td>Red</td><td>Red</td></tr> <tr><td>3</td><td>Gray</td><td>Gray</td></tr> <tr><td>4</td><td>Pink</td><td>Pink</td></tr> </table>  <table border="1"> <tr><td>2</td><td>Brown</td><td>Brown</td></tr> <tr><td>7</td><td>Blue</td><td>Blue</td></tr> <tr><td>5</td><td>Black</td><td>Black</td></tr> <tr><td>6</td><td>White</td><td>White</td></tr> <tr><td>1</td><td>Yellow</td><td>Yellow</td></tr> <tr><td>8</td><td>Red</td><td>Red</td></tr> <tr><td>3</td><td>Gray</td><td>Gray</td></tr> <tr><td>4</td><td>Pink</td><td>Pink</td></tr> </table>	2	Brown	Brown	7	Blue	Blue	5	Black	Black	6	White	White	1	Yellow	Yellow	8	Red	Red	3	Gray	Gray	4	Pink	Pink	2	Brown	Brown	7	Blue	Blue	5	Black	Black	6	White	White	1	Yellow	Yellow	8	Red	Red	3	Gray	Gray	4	Pink	Pink	0.5 m	F39-JGR5B-D
2	Brown	Brown																																																		
7	Blue	Blue																																																		
5	Black	Black																																																		
6	White	White																																																		
1	Yellow	Yellow																																																		
8	Red	Red																																																		
3	Gray	Gray																																																		
4	Pink	Pink																																																		
2	Brown	Brown																																																		
7	Blue	Blue																																																		
5	Black	Black																																																		
6	White	White																																																		
1	Yellow	Yellow																																																		
8	Red	Red																																																		
3	Gray	Gray																																																		
4	Pink	Pink																																																		
			1 m	F39-JG1B-D																																																
			3 m	F39-JG3B-D																																																
			5 m	F39-JG5B-D																																																
			7 m	F39-JG7B-D																																																
			10 m	F39-JG10B-D																																																
			15 m	F39-JG15B-D																																																
			20 m	F39-JG20B-D																																																

4-joint plug/socket connector

Appearance	Type	Specification	Order code
	4 joint connector for receivers	Muting 4-joint connector for connection of F3W-MA and F3SG-RA receivers	F39-GCN4-D
	4 joint connector for transmitters	Muting 4-joint connector for connection of F3W-MA and F3SG-RA transmitters	F39-GCN4-L

Mounting brackets

Appearance	Type	Specification	Order code
	Standard fixed bracket set (Two brackets per set)	Bracket to mount the F3SG-R. Side mounting and backside mounting possible.	F39-LGF
	Standard adjustable bracket set (Two brackets per set)	Bracket to mount the F3SG-R. Beam alignment after mounting possible. The angle adjustment range is ±15°. Side mounting and backside mounting possible.	F39-LGA

Specifications

Item	F3W-MA030P	F3W-MA010P
Beam gap between muting trigger beams	300 mm	100 mm
Operating range (Dip switch option)	0.3 to 7.0 m or 0.3 to 20.0 m	
Light source	Infrared LEDs, Wavelength: 870 nm	
Power supply voltage (Vs)	SELV/PELV 24 VDC ±20% (ripple p-p 10% max.)	
Functions	Scan code selection, operation mode selection (Point to point detection/chattering and void space prevention), Off-delay, muting enable, muting trigger beam allocation, operating range selection	
Ambient temperature	Operating: -10 to 55°C (non-icing) Storage: -25 to 70°C	
Ambient humidity	Operating: 35% to 85% (non-condensing) Storage: 35% to 95%	
Degree of protection (IEC 60529)	IP65 and IP67	
Material	Housing: Aluminum, Cap: PBT, Front window: PMMA, Cable: Oil resistant PVC, Mounting bracket: ZDC2, FE plate: SUS	

Note: For more information, please check the user manual Z355-E1

Общие сведения о компании Omron

Входит в список 2000 крупнейших компаний мира по версии журнала Forbes
 Omron Corporation на бирже NASDAQ: OMRNY
 Высокий рейтинг по индексу устойчивого развития Доу-Джонса
 Входит в топ-100 инновационных компаний мирового уровня согласно Thomson Reuters



Линейка продукции из 200 000 наименований: ввод, логика, вывод и безопасность

Датчики, системы управления, визуализация, приводы, робототехника, безопасность, контроль качества, компоненты управления и коммутации

6%

Ежегодные инвестиции в исследования и разработки

37 500
работников по всему миру

200
филиалов по всему миру

22
страны в Европе, на Ближнем востоке и в
Африке

Послужной список изобретений длиной в 80 лет

1200 сотрудников заняты в сфере НИОКР
 Более 12 500 выданных и ожидающих решения патентов

Работа на благо общества



Помогаем удовлетворить ваши потребности

Технические тренинги и семинары, техническая поддержка, центры технологий автоматизации, сообщество единомышленников (MyOmron), Интернет-каталоги и техническая документация, поддержка клиентов и продажи, лаборатории операционной совместимости (Цунаги), обеспечение безопасности, ремонтные работы.

Хотите узнать больше?

OMRON РОССИЯ

 +7 495 648 94 50

 industrial.omron.ru

Офисы поддержки и продаж

Австрия

Тел.: +43 (0) 2236 377 800
industrial.omron.at

Бельгия

Тел.: +32 (0) 2 466 24 80
industrial.omron.be

Великобритания

Тел.: +44 (0) 870 752 0861
industrial.omron.co.uk

Венгрия

Тел.: +36 1 399 30 50
industrial.omron.hu

Германия

Тел.: +49 (0) 2173 680 00
industrial.omron.de

Дания

Тел.: +45 43 44 00 11
industrial.omron.dk

Испания

Тел.: +34 902 100 221
industrial.omron.es

Италия

Тел.: +39 02 326 81
industrial.omron.it

Нидерланды

Тел.: +31 (0) 23 568 11 00
industrial.omron.nl

Норвегия

Тел.: +47 22 65 75 00
industrial.omron.no

Польша

Тел.: +48 22 458 66 66
industrial.omron.pl

Португалия

Тел.: +351 21 942 94 00
industrial.omron.pt

Турция

Тел.: +90 (216) 556 51 30
industrial.omron.com.tr

Финляндия

Тел.: +358 (0) 207 464 200
industrial.omron.fi

Франция

Тел.: +33 (0) 1 56 63 70 00
industrial.omron.fr

Чешская Республика

Тел.: +420 234 602 602
industrial.omron.cz

Швейцария

Тел.: +41 (0) 41 748 13 13
industrial.omron.ch

Швеция

Тел.: +46 (0) 8 632 35 00
industrial.omron.se

Южная Африка

Тел.: +27 (0)11 579 2600
industrial.omron.co.za

Другие представительства

Omron

industrial.omron.eu