

Safety door switches tailored to meet the diverse requirements of global equipment specifications.




A cost-effective model that ensures safety compliance around the world

Production facilities across the globe must adhere to the specific requirements of each location.

Ensuring safety throughout the manufacturing processes is essential, and considering the associated costs is a critical aspect.

The D40A-2 is a non-contact safety door switch designed to address these challenges.

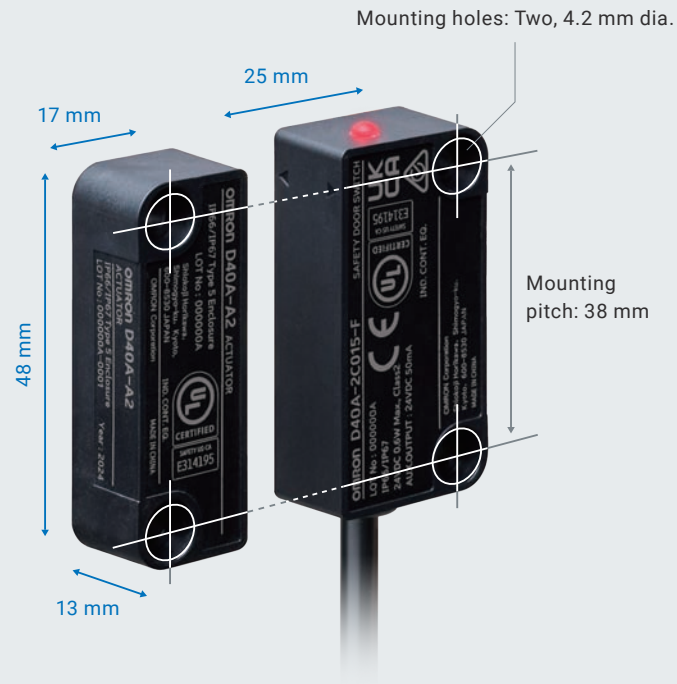


D40A-2 Actual size

Application example
Single wafer cleaner



Filling machine

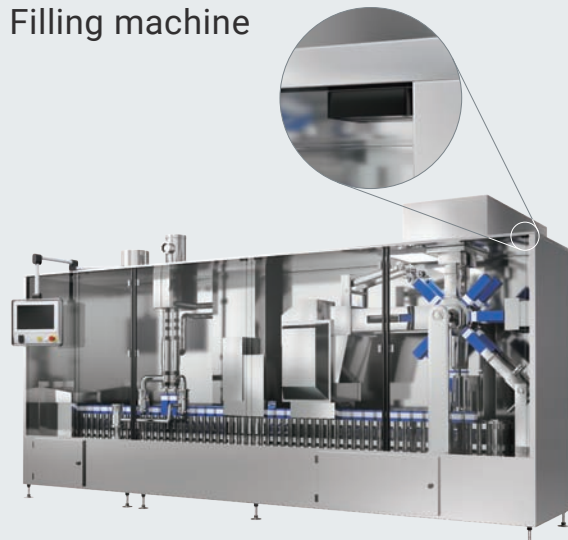

PLe/Safety Category 4 and cost optimization

- PLe/Category 4 achieved with the diagnostic functions of the safety controllers
- Simplicity in design, economy in cost.

>P.4



Environmental resistance for a variety of applications

- Operates in temperatures from -25°C to +70°C
- ECOLAB-certified for wash down processes
- A label-free design ideal for processes requiring strict cleanliness standards

>P.6



Globally applicable detection technologies and auxiliary output models

- Switches with magnetic detection offer precise, stable detection and are usable globally without radio regulations.
- Bipolar NPN/PNP design to meet the design philosophies of each region.

>P.7



PLe/Safety Category 4 and cost optimization


Safety for use with a variety of equipment

Certified lineup




Achieves PLe/Category 4 even when connected in series

*1. The maximum number of connectable switches is (30) for G9SX-NS/NSA, (15) or (30) for G9SP, and (20) per unit (maximum (10) per terminal) for NX-series safety controllers

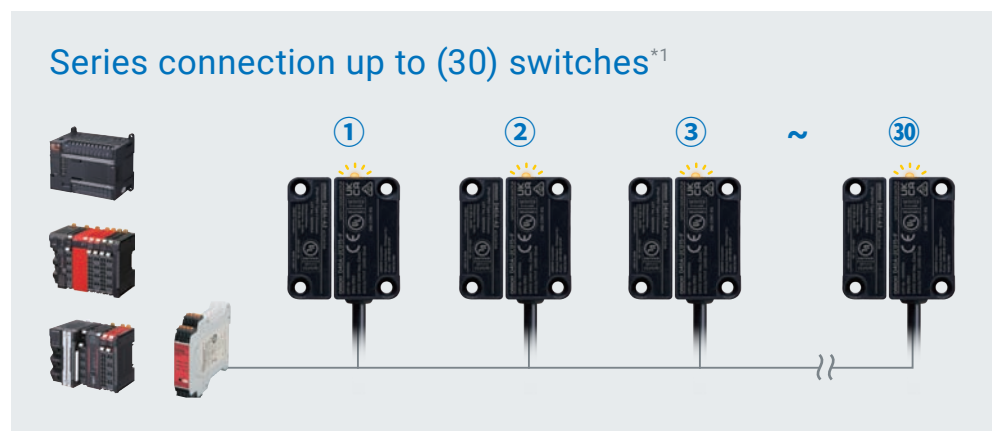

A streamlined design achieved through the diagnostic functions of the safety controllers.


The diagnostic function of the safety controllers simplify the design of the D40A-2 and contributes to cost optimization.

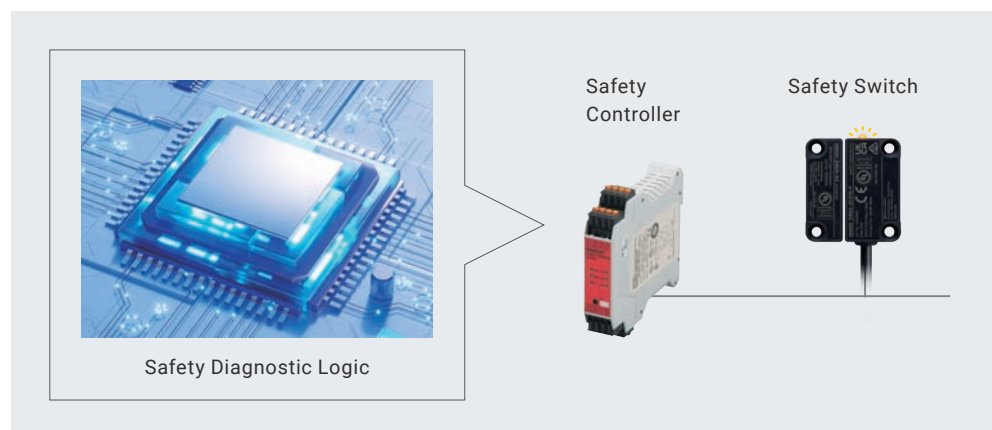

Flexible wiring even when control panels are distant

With a total wiring length of up to 200 m, allowing for highly flexible wiring routing.

*2. For details, refer to the wiring instructions with respective controllers.

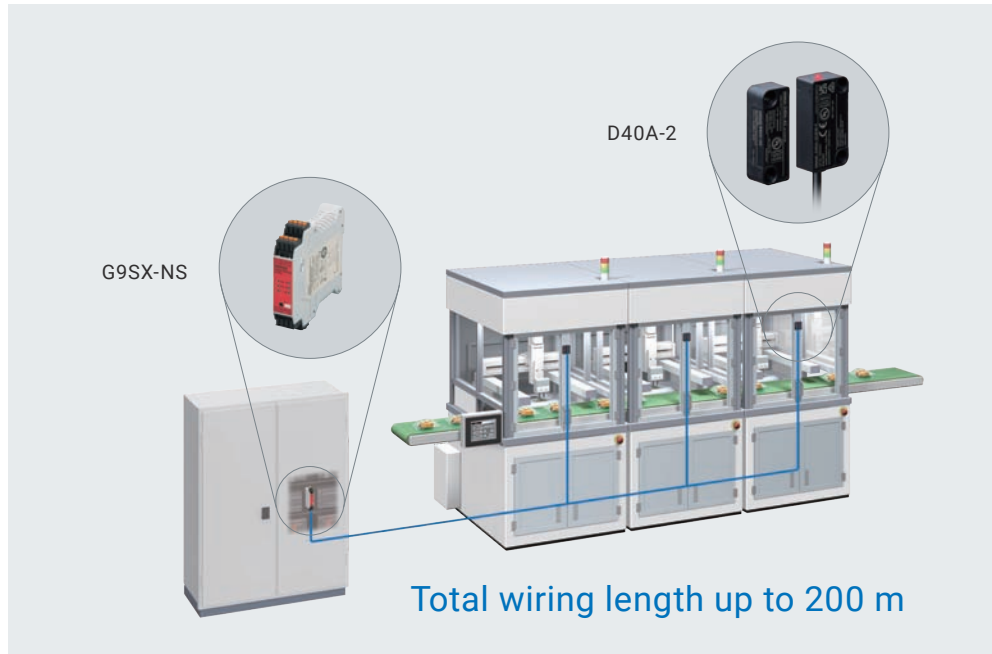

Auxiliary output allows relay operation.

Auxiliary outputs can operate general purpose relays. Auxiliary output*3 can be used in a wider range of applications.

*3. Check the specifications of the auxiliary output and make sure to select the relay that meets your application requirements. Auxiliary output cannot be used alone for safety functions.

- 50 mA (PNP transistor output model)
- 20 mA (Photocoupler output model)



Available for signal conversion

Safety controllers available to match the scale of your application.


Connects to safety controllers for applications ranging from simple safety interlocks to large equipment requiring multi-axis control.



Environmental resistance for a variety of applications

Suitable for harsh temperature environments

Operates in temperatures from -25°C to +70°C. Allows for installation on equipment in harsh temperature environments.

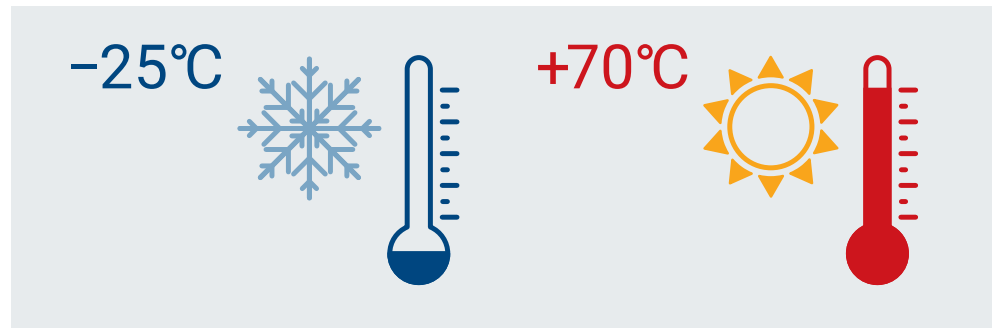

Ideal for wash down environments

IP66 and IP67 compliant according to IEC 60529. Can be used in chemical cleaning environments in addition to cleaning with high-pressure water jet spray. Chemical resistance is certified by Ecolab. (Neutral and alkaline chemicals are applicable.)

For details on IEC 60529 (Degree of protection), see below.



Degree of Protection (IEC 60529)

omron Degree of Protection



<https://www.ia.omron.com/product/cautions/common/degree-of-protection/>

Suitable for processes requiring a clean environment


Resin exterior, resin filling, and label-free design thoroughly reduce the risk of dust and foreign object contamination.



Globally applicable detection technologies and auxiliary output models


Accurate and stable detection

The D40A-2 provides stable detection even when the door is closed slowly.

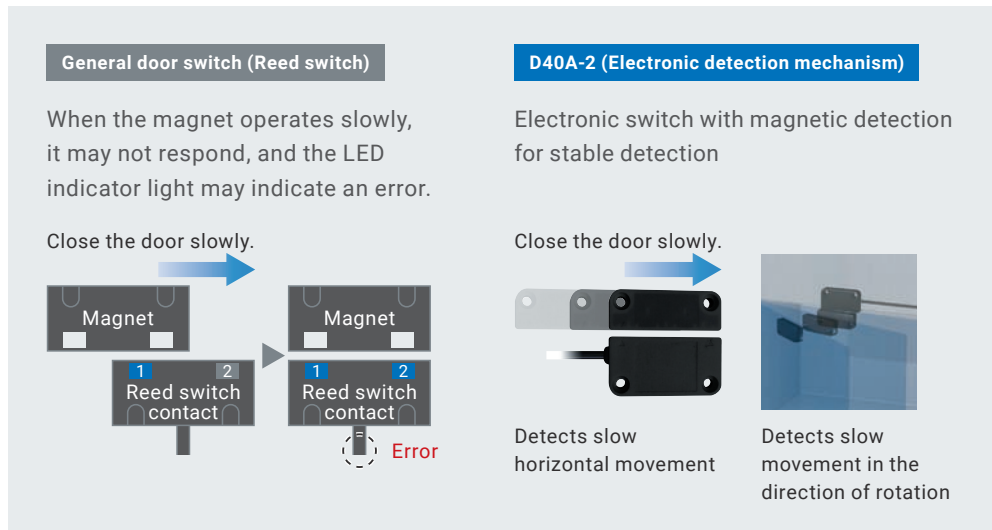


Not subject Radio signalrestrictions

The D40A-2 is not subject to regional radio restrictions, allowing for seamless use in any location worldwide.

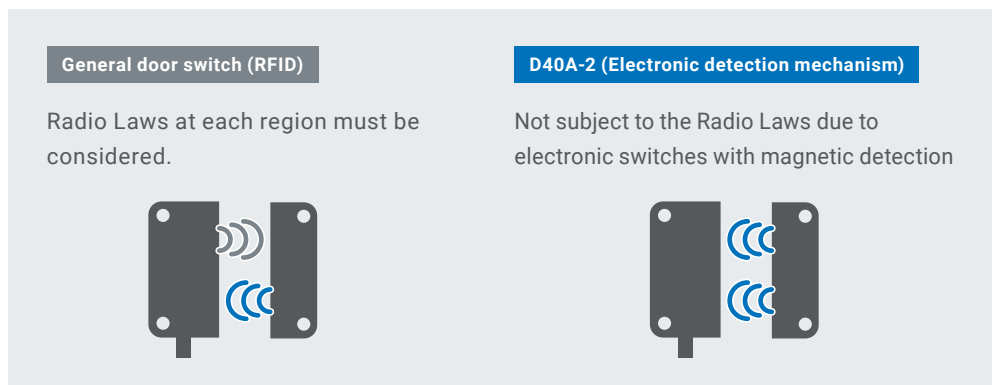

Responding to regional design philosophies

The D40A-2 can accommodate regional design philosophies. Bipolar NPN/PNP designs are suitable for a variety of customer applications and equipment.

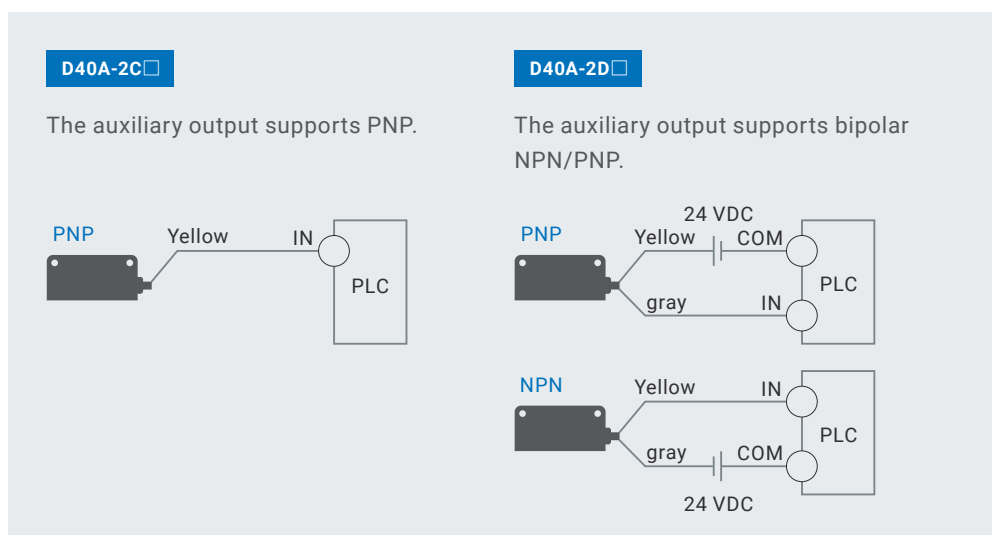

Refer to the catalog below for information on corresponding safety controllers.



Safety Controllers
G9SX Series

Cat.No.F120



Safety Controller
G9SP


Cat.No.F090



Safety I/O Units
NX-SI/SO

Cat.No.F123

A datasheet for the D40A-2

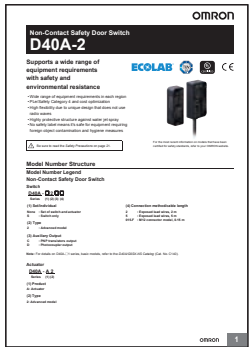

Non-Contact Safety
Door Switch
D40A-2

Cat.No.F133

- The product photographs and figures that are used in this catalog may vary somewhat from the actual products.
- Ecolab and its logo are registered trademarks of Ecolab USA Inc.
- Some images are used under license from Shutterstock.com.
- Other company names and product names in this video are the trademarks or registered trademarks of their respective companies.
- QR code is the registered trademark of DENSO WAVE.

Note: Do not use this document to operate the Unit.

OMRON Corporation Industrial Automation Company

Kyoto, JAPAN

Contact : www.ia.omron.com

Regional Headquarters

OMRON EUROPE B.V.
Wegalaan 67-69, 2132 JD Hoofddorp
The Netherlands
Tel: (31) 2356-81-300 Fax: (31) 2356-81-388

OMRON ASIA PACIFIC PTE. LTD.
438B Alexandra Road, #08-01/02 Alexandra
Technopark, Singapore 119968
Tel: (65) 6835-3011 Fax: (65) 6835-3011

OMRON ELECTRONICS LLC
2895 Greenspoint Parkway, Suite 200
Hoffman Estates, IL 60169 U.S.A.
Tel: (1) 847-843-7900 Fax: (1) 847-843-7787

OMRON (CHINA) CO., LTD.
Room 2211, Bank of China Tower,
200 Yin Cheng Zhong Road,
PuDong New Area, Shanghai, 200120, China
Tel: (86) 21-6023-0333 Fax: (86) 21-5037-2388

Authorized Distributor:

©OMRON Corporation 2024 All Rights Reserved.
In the interest of product improvement,
specifications are subject to change without notice.

CSM_2_2
Cat. No. F134-E1-03 0924 (0624)