

# Openness meets Automation Control



# Industrial PC

## Powerful, reliable, scalable - and tough as they come

Our NY Industrial PC has been designed from first principles to be powerful, reliable and scalable, making it ideally suited to visualization, data handling, measuring and controlling. We've simplified the design and build to eliminate faults caused by complexity and, with other unique design features, to maximize uptime and reduce costs. The future will be IT driven: Omron's IPC platform will make you part of it.

## Simplicity improves reliability

Unnecessary complexity causes problems, so we've eliminated it totally, to improve reliability, maximize performance.

- No internal cables
- No complex heatpipes
- Structurally uniform mechanics to enable future expansion
- Reduced assembly, maintenance and labor costs
- Rock-solid architecture. Die-cast aluminum case



- Intel® Xeon® Processor
- Intel® Core™ i7 Processor
- Intel® Core™ i5 Processor
- Intel® Core™ i3 Processor
- Intel® Celeron® Processor
- Intel® Atom® Processor

## Performance

- Based on Intel® Atom®, Celeron®, Core™ i3, Core™ i5, Core™ i7, Xeon® processors
- Up to 96 GB ECC(DDR4 SDRAM) supported
- Intel® Iris™ Pro Graphics or Intel® HD Graphics
- Unique heatsink effectiveness
- RoHS Directive (2002/95/EC), EU Directives, KC Registration, RCM, cULus



Active cooling and air-flow isolated from the electronics

Powerful. Tough. Future proof.



**Connections**

Options: RS-232C, extra DVI-D or DisplayPort++ \*4 for dual monitor, NY Monitor Link or GigE LAN

PCIe Card Slot Half-length (X1 or X4 depending on CPU)

SD Memory card slot \*4 (2.0 spec and up to 32 GB)

DVI or DisplayPort++ \*4

3x RJ45 Gigabit Ethernet ports

CFast card slot \*3

2x USB2.0, 2x USB3.0

Choice of storages devices: HDD or SSD (MLC and long-life SLC types)  
Second drive option  
Hardware-RAID (RAID1)

I/O connection prepared for UPS connection

Power supply: 24VDC non-isolated

**Industrial Panel PC: very stylish...**

Our industrial-quality touchscreen panel PC's and monitors enable operator and maintenance engineer to interact more effectively with the machine. The touchscreen controller can detect non-standard actions such as false touches, palm rejection, water and cleaning - even if the user is wearing gloves.\*1



**Industrial Box PC**

3 layer size



NYB1E, NYB27, NYB2E, NYB37, NYB55

2 layer size



NYB35, NYB2C, NYB65, NYB13

1 layer size (with FAN)



NYB27, NYB2E, NYB37, NYB55

1 layer size (without FAN)



NYB35, NYB2C, NYB2A, NYB13

**A few details...**

- 12.1, 15.4 & 18.5 Inch industrial display
- Multi-touch, using the latest projected capacitive technology
- False touch detection
- Glove operation\*1
- Easy built-in supportive mounting
- Unique customized logo

\*1. When using gloves, ensure to use gloves that are functional with this touchscreen.

\*2. Industrial Monitor won the iF Design Award 2016. The iF Product design Award, presented by Hannover-based International Forum Design GmbH, is one of the world's most prestigious design awards.

\*3. An optional CFast Card slot is located at the rear side of the base layer.

\*4. 11th generation CPU: Equipped with DisplayPort++ instead of DVI, but no SD Memory Card slot.

# Industrial PC IPC Machine Controller

## Perfect fusion: Sysmac machine control and IT technology

Designed specifically for machine usage, making them innovative yet reliable, the IPC Machine Controller combines the precision and utility of the Sysmac platform with the versatility and range of Windows programs. The two platforms operate simultaneously but separately, so if Windows is down, the machine just keeps on working. As a result, engineers become unstoppable - empowered to explore manufacturing innovation by leveraging big data, NUI (Natural User Interface) and IoT (Internet of Things) initiatives, all without compromising proven PLC reliability and robustness.

## Industrial PC

- 7th generation Intel® Core™ i5  
Four core/4 threads
- Windows 10 IoT Enterprise 2019 LTSC 64bit
- Open operating system enables use of own software
- Ethernet port for access to your IT systems

## Machine Controller

- Sysmac Machine control inside
- 500 μs system cycle time
- 16 to 64 axes of motion control
- EtherNet/IP port for machine-to-machine, HMI communication
- EtherCAT port for up to 192 synchronized slaves
- Safety over EtherCAT - FSoE



## Sysmac Studio


### Integrated Development Environment

- A single tool for logic sequence, motion, safety, robotics, vision, HMI and Database connection
- Open standard IEC 61131-3
- Sysmac Library to optimize engineering time and machine availability



reddot award 2016\*1  
winner

GOOD DESIGN AWARD 2017\*2

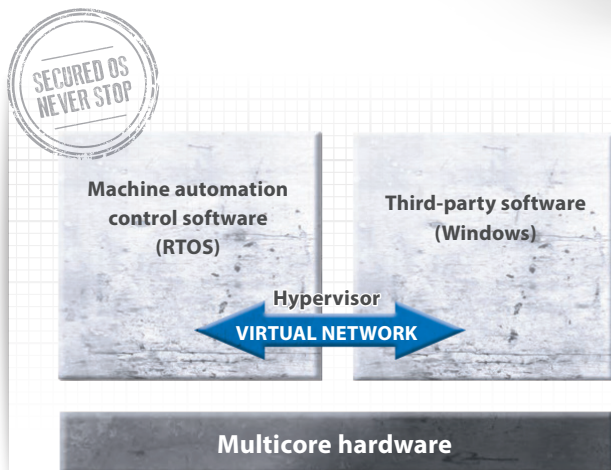

## The beating heart of the IPC Machine Controller


Our challenge was to use Sysmac machine control in combination with an open operating system like Windows. Normally it would be done using full virtualization, but this would influence the machine control, so it wasn't acceptable to us. Instead, we use partitioning, so that both operating systems can work independently: if Windows is down, the machine is not affected.

\*1. Industrial Box PC was awarded the Red Dot Award 2016 in the category 'computers'. The Red Dot design award has been presented by the Design Zentrum Nordrhein Westfalen since 1955. It is one of the best-respected design competitions in the world, along with the iF award (Germany) and IDEA (the United States).

\*2. Industrial Box PC was awarded the Good Design Award 2017. The Good Design Award has been a sole comprehensive design evaluation and commendation system in Japan since 1957. Many companies and designers from both inside and outside of Japan participate in this activity to enhance their industry or quality of life through design.



## Sysmac Integrated Platform

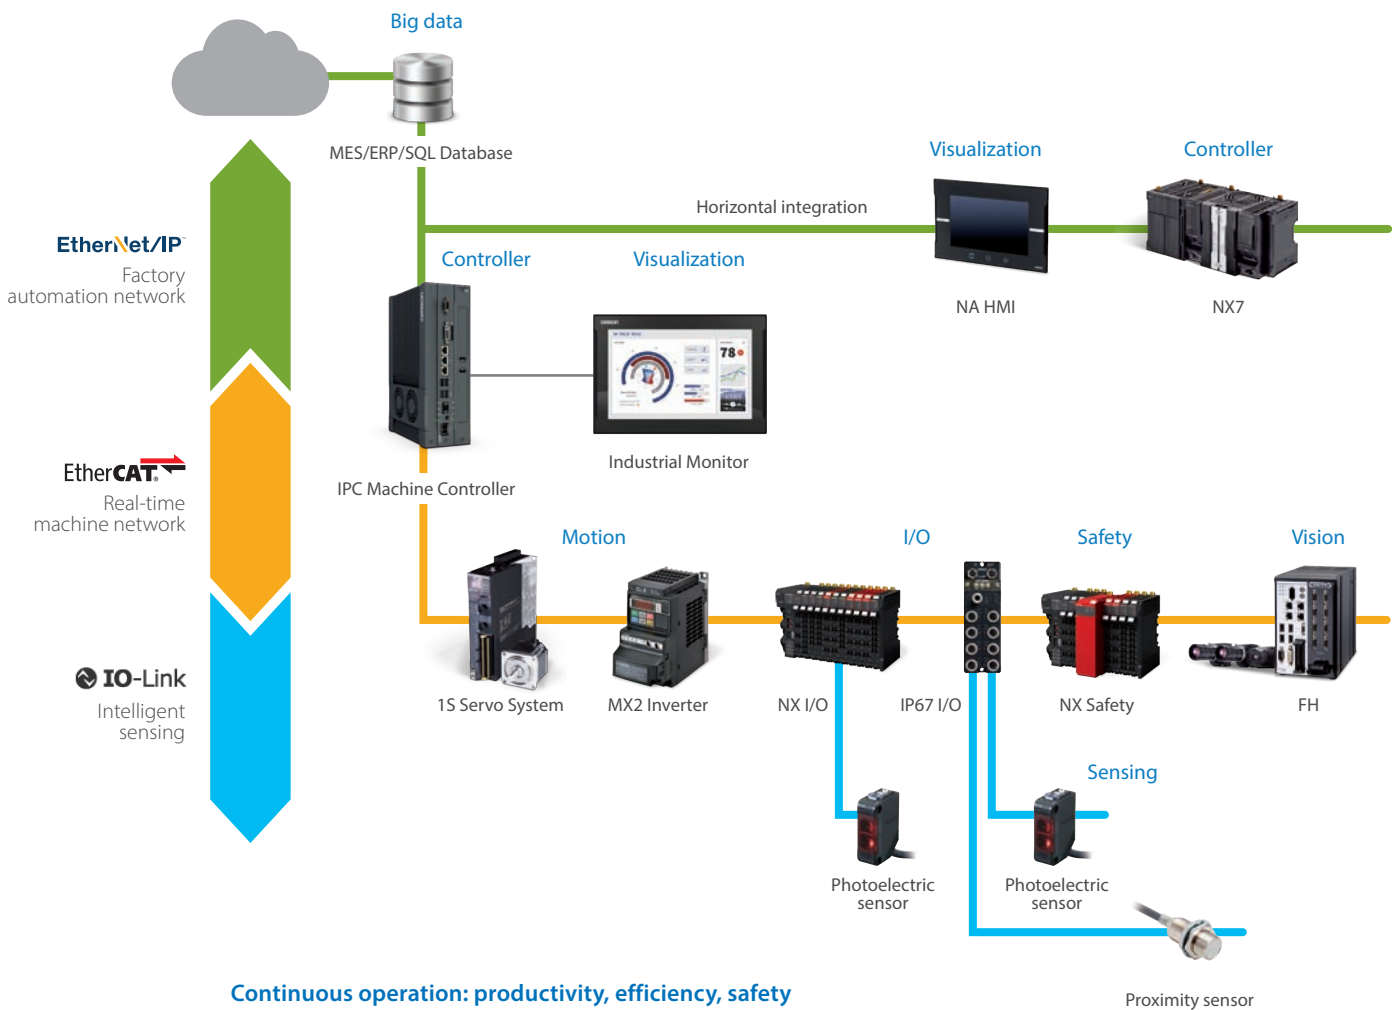

### Continuous operation: productivity, efficiency, safety

- Vertical integration delivers production data from manufacturing process directly to IT systems
- Data management enables machine data to be recorded, stored and analyzed to improve productivity
- EtherCAT connectivity simplifies installation of production modules and safety devices

**SYSMAC**  
always in control

# Industrial PC IPC RTOS Controller

Available in Japan only. Please consult your OMRON representative for details.

## Real-time operating systems: freedom at your fingertips

The Omron IPC RTOS Controller enables you to program own real-time control of your machine functionality and at the same time executing advanced data processing tasks. Combine it with ultra-reliable EtherCAT network for seamless connectivity of both Omron and third-party devices. By bringing together the worlds of real-time OS, EtherCAT connectivity and IT, you benefit from high-speed, high-precision and real-time machine control, and secure connectivity to the Internet of Things. You are in control: you are unstoppable.

## Industrial PC

- Hardware with proven reliability
- PLC-level environmental resistance
- Long-term supply stability
- Fully scalable



NYM  
Industrial Monitor



NYB  
Industrial Box PC

## RTOS

### VxWorks

- Real time
- High-speed operation and superior development efficiency
- Robust

### Linux

- Extensive library of open source software (OSS)
- Readily available information via books and websites
- Robust



### Real-time control

- High-speed and low-jitter event-driven control
- Multitasking control to specify both conditions and orders for execution




### High development efficiency

- Familiar C-language (C/C++) enables easy reuse of application assets
- Low switching cost
- Excellent integrated development environment, including debugging and monitoring functions to increase development efficiency
- More than 1,000 OSS applications already available in Linux platform




### Execution performance

- Superior execution performance enables improved operational efficiency, even with limited hardware resources.

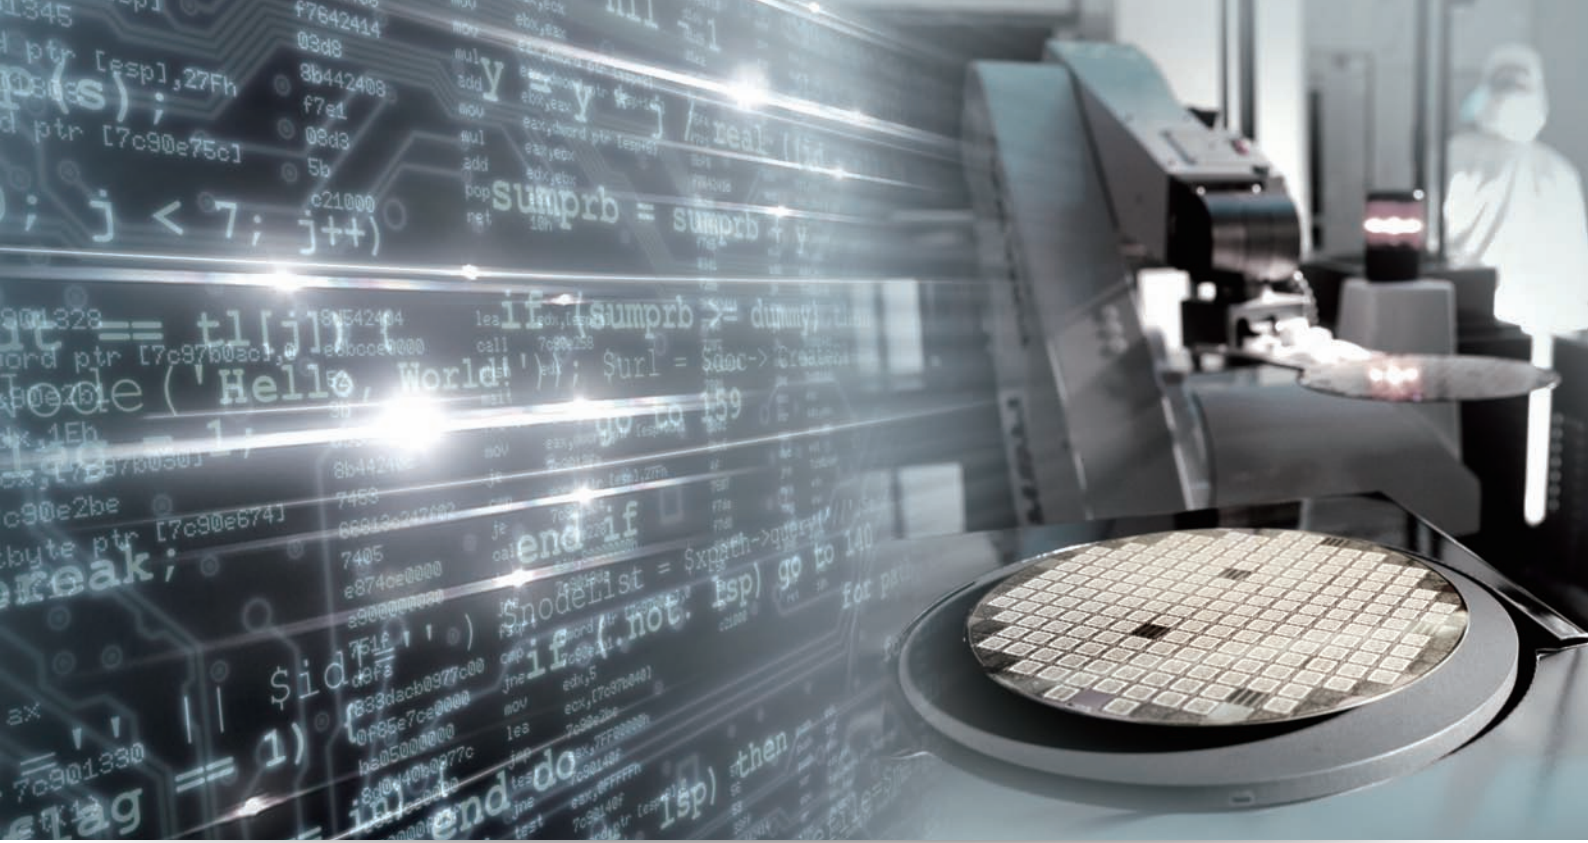


## System Configuration

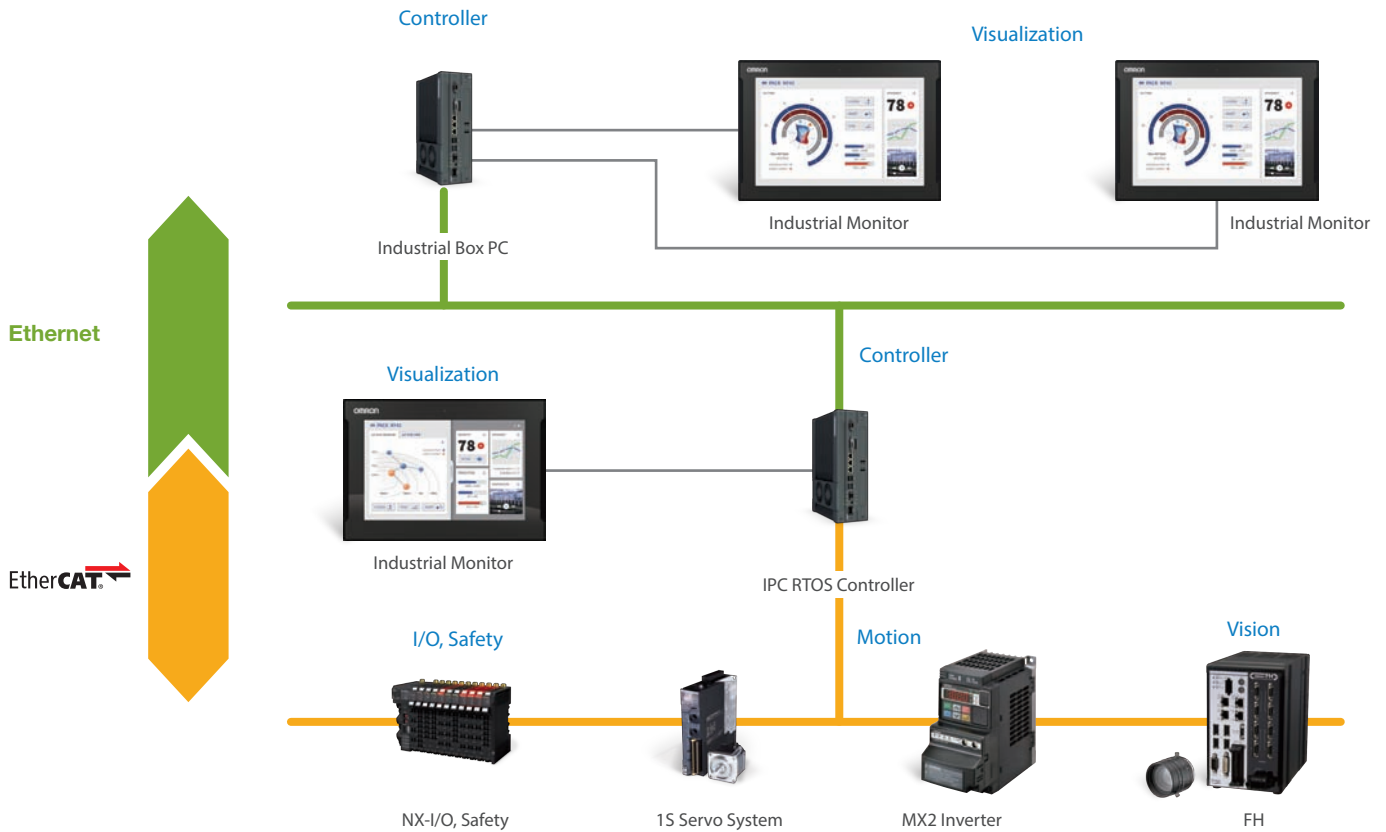

# Industrial PC Programmable Multi Axis Controller

## Windows and separate Multi Axis Controller: great scalability

Omron helps manufacturers boost both their productivity and their manufacturing quality. The control kernel comes equipped with Programmable Multi Axis Controller that offers exceptionally precise motion control with proven technology from Omron's Delta Tau Data Systems, Inc. Combined with this control kernel, applications running on the industrial PC platform which can be integrated into a machine enable the creation of customized motion control.

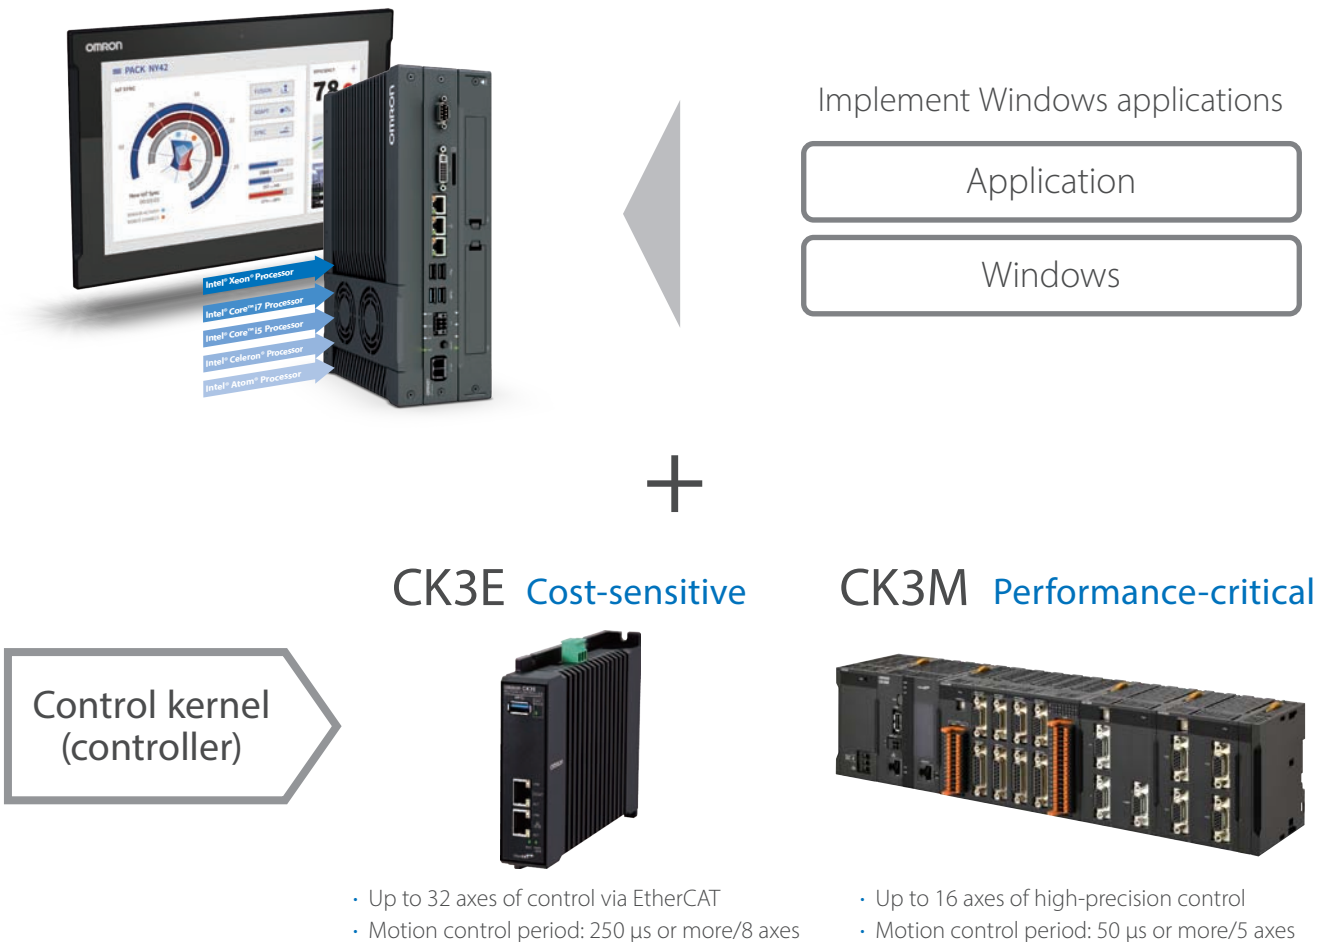

### High-speed multi-axis control

- Up to 32 axes of control
- Motion control period: 50 μs/5 axes



### Flexibility

- Flexible function development capability (ANSI C, original programming language, G-Code)
- EtherCAT for flexible system configuration




### Scalability

- Expansion units for creation of flexible applications using gantry mechanisms and galvo laser
- Customizable control algorithms






## Industrial PC Platform

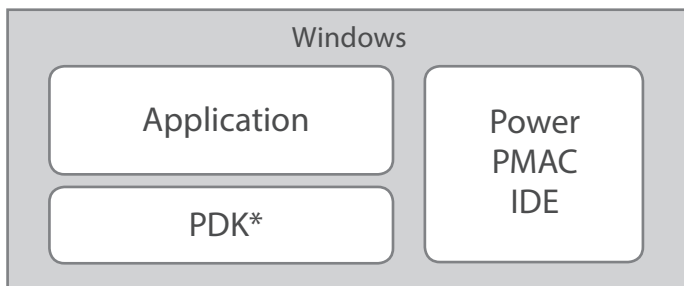

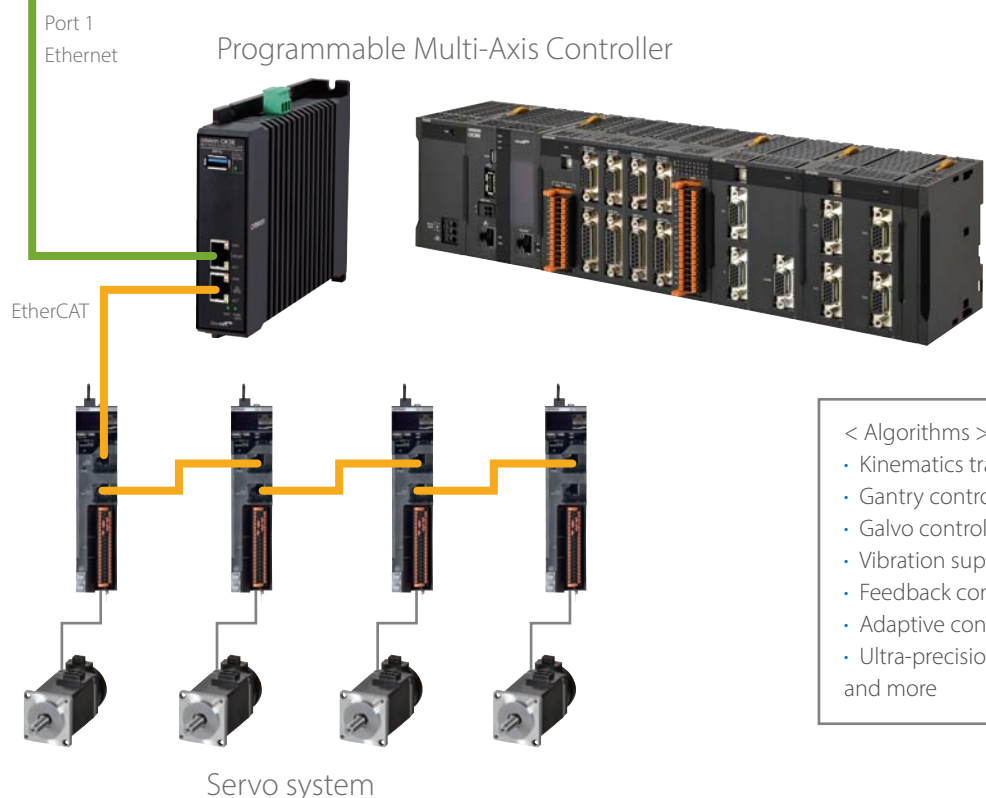

\* Power PMAC Development Kit  
Development kit to communicate with PMAC on Windows



- < Algorithms >
- Kinematics transformation
  - Gantry control
  - Galvo control
  - Vibration suppression control
  - Feedback control
  - Adaptive control
  - Ultra-precision position control and more



# Industrial PC Platform family

INDUSTRIAL PC PLATFORM		
		
<b>Product name</b>	<b>Industrial PC</b>	
<b>Type</b>	<b>Industrial Box PC</b>	<b>Industrial Panel PC</b>
<b>Model</b>	<b>NYB</b>	<b>NYP</b>
Description	Compact design that offers flexibility, expandability and easy maintenance for applications in factory automation environments	Combines the functionality of the Industrial Box PC and Industrial Monitor
Operating system	No operating system Windows 10 IoT Enterprise 2016 LTSB - 64 bit Windows 10 IoT Enterprise 2019 LTSC - 64 bit Windows 10 IoT Enterprise 2021 LTSC - 64 bit	
Function module	—	
Number of axes	—	
CPU type	Intel® Xeon® W-11865MRE 11th generation CPU with Fan Unit for active cooling Intel® Core™ i7-1185GRE 11th generation CPU with Fan Unit for active cooling Intel® Core™ i5-1145GRE 11th generation CPU with Fan Unit for active cooling Intel® Core™ i5-1145GRE 11th generation CPU with fanless cooling Intel® Core™ i3-1115GRE 11th generation CPU with fanless cooling Intel® Xeon® E3-1515M v5 Processor 6th generation CPU with Fan Unit for active cooling Intel® Core™ i7-7820EQ Processor 7th generation CPU with Fan Unit for active cooling Intel® Core™ i5-7300U Processor 7th generation CPU with fanless cooling Intel® Celeron® 3965U Processor 7th generation CPU with fanless cooling Intel® Atom® Apollo Lake x5-E3940 Processor with fanless cooling	Intel® Core™ i5-1145GRE 11th generation CPU with fanless cooling Intel® Core™ i3-1115GRE 11th generation CPU with fanless cooling Intel® Atom® x6425RE with fanless cooling Intel® Core™ i7-7820EQ Processor 7th generation CPU with Fan Unit for active cooling Intel® Core™ i5-7300U Processor 7th generation CPU with fanless cooling Intel® Celeron® 3965U Processor 7th generation CPU with fanless cooling Intel® Atom® Apollo Lake x5-E3940 Processor with fanless cooling
RAM memory	8 GB, 16 GB, 32 GB, 64 GB, 96 GB (ECC supported) *1 2 GB, 4 GB, 8 GB, 16 GB, 32 GB, 64 GB, 96 GB (non ECC)	2 GB, 4 GB, 8 GB, 16 GB, 32 GB, 64 GB (non ECC)
Storage	HDD, SSD, CFast, SD memory card *2	
Display size	—	12.1 inches, 15.4 inches, 18.5 inches
Built-in ports	<ul style="list-style-type: none"> <li>• Ethernet</li> <li>• DVI</li> <li>• USB 2.0/3.0/3.1 Gen1</li> <li>• DisplayPort++ *2</li> </ul>	
Interface option	RS-232C, DVI-D, NY Monitor Link, GigE LAN, DisplayPort++ *2	RS-232C, DVI-D, NY Monitor Link, DisplayPort++ *2
Expansion slots	1 PCIe slot	
RAID	Hardware-RAID (RAID1)	—

Note:1. Not all combination are possible, please visit the product selector on the global website to make your selection.

\*1. Only for models with Intel® Xeon® Processor.

\*2. 11th generation CPU: Equipped with DisplayPort (Dual mode: DP++) instead of DVI, but no SD Memory Card slot.

INDUSTRIAL PC PLATFORM	
	
<b>IPC Machine Controller</b>	
<b>Industrial Box PC</b>	<b>Industrial Panel PC</b>
<b>NY51□-1</b>	<b>NY53□-1</b>
Two operating systems: Windows and Real-Time OS	
Windows 10 IoT Enterprise 2019 LTSC - 64 bit	
Machine Automation Control Software	
16, 32, 64	
Intel® Core™ i5-7440EQ Processor 7th generation CPU with Fan Unit for active cooling Intel® Core™ i7-4700EQ Processor 4th generation CPU with Fan Unit for active cooling *3	
8 GB, 32 GB (non-ECC type)	
HDD, SSD, CFast, SD memory card	
—	12.1 inches, 15.4 inches
<ul style="list-style-type: none"> <li>• Ethernet</li> <li>• EtherNet/IP</li> </ul>	<ul style="list-style-type: none"> <li>• EtherCAT</li> <li>• USB 2.0/3.0</li> <li>• DVI</li> </ul>
RS-232C, DVI-D, NY Monitor Link	
1 PCIe slot	
—	

\*3. Not recommended for new projects.

## INDUSTRIAL PC PLATFORM



Product name	Industrial Monitor		
Model	NYM12	NYM15	NYM19
Description	Display and touch interface for the Industrial PC Platform		
Display device	TFT LCD		
Screen size	12.1 inches	15.4 inches	18.5 inches (18.5 also available with Nickel Plated front)
Resolution	Up to 1,280 x 800 pixels at 60 Hz		Up to 1,920 x 1,080 pixels at 60 Hz
Colors	16,770,000 colors		
Connectors	<ul style="list-style-type: none"> <li style="width: 50%;">• 1 Power Connector</li> <li style="width: 50%;">• 1 DVI-D Connector</li> <li style="width: 50%;">• 2 USB Type-A Connector</li> <li style="width: 50%;">• 1 USB Type-B Connector</li> </ul>		
Built-in options	NY Monitor Link		
Allowable power supply voltage range	19.2 to 28.8 VDC		

**UNINTERRUPTIBLE POWER SUPPLY (UPS)**



<b>Model</b>		<b>S8BA*</b>	
Capacity		120 W	240 W
Input voltage		24 VDC	
Output voltage	Normal operation	Output of input voltage as-is	
	Backup operation	24VDC±5%	
Backup time (25°C, initial characteristics)		6 min. (120 W)	6 min. (240 W)
I/O signal		Yes (RJ45)	
Dimensions (W × D × H mm)		94×100×100	148×100×100
Weight of unit		Approx. 0.8 kg	Approx. 1.3 kg

\* Revision number 04 or higher.

# Several kinds of software combination for solving customer's problem and making new solutions

Supporting customer's new challenges by new visualization and digitization technology

**F-Scope**

**i-BELT**

Japan

Easy start of visualization for production line



**Soft-NA**

Visualization and maintenance of machine condition




**Comfortable Industrial PC platform powered by smart software**



**FHV7 Software**

Integration of image processing and data collection



**Best Match with 3rd party products**

Japan

New solution created by the combination with 3rd party software

Refer to the Best Match! Pamphlet (Cat No. P139).



# F-Scape




## Small start of production data collection and visualization

You can easily utilize data from production sites.

In addition to collecting and visualizing data, this software highlights on-site issues and helps solve problems as an organizational communication tool.

**POINT 1** Easy to install

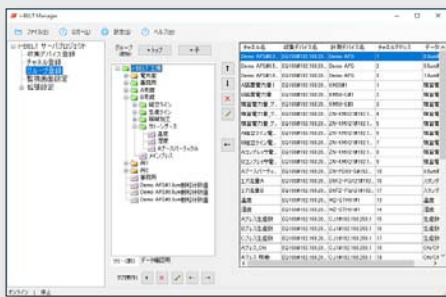

**POINT 2** Hierarchical display according to purpose


Drill-down function

Factory manager


Floor manager

Line reader

Operator

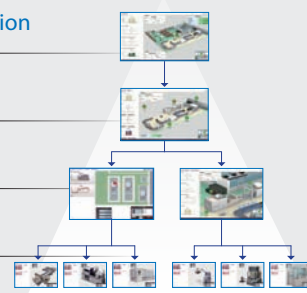

**POINT 3** Errors at a glance

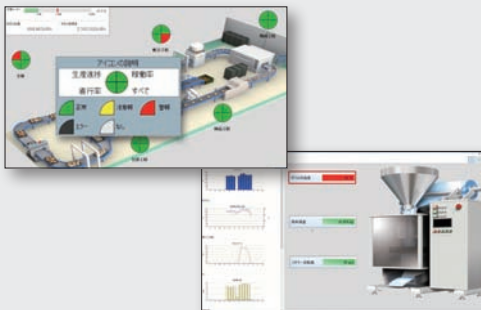

**POINT 4** Easy data comparison



\* Now available only in Japan.

# Soft-NA

## Visualization and improving maintenance

Windows HMI software connecting with NJ/NX Controller seamlessly.  
Realizing visualization or better maintenance.

## System configuration




- Installing integrated development environment of HMI
- Additional application software available together
- Wide selection of screen size or CPU selectable from IPC product portfolio

## Easy development and operation of control application

### One Software, Sysmac Studio, manages all program assets

Seamless connection with NJ/NX Controller is available by sharing PLC data with integrated development environment or simulator.

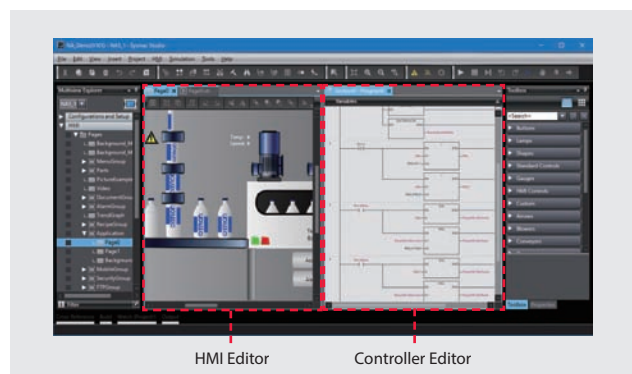

### Controller troubleshooting

Trouble shooting feature is embedded in.  
Quick action for every trouble can be possible by a special video screen to solve the problem.






# Software for FHV7

## Combine image processing application with data gathering

By tow Items of NY and FHV7: You can build sophisticated image inspection and data collection.

## System configuration

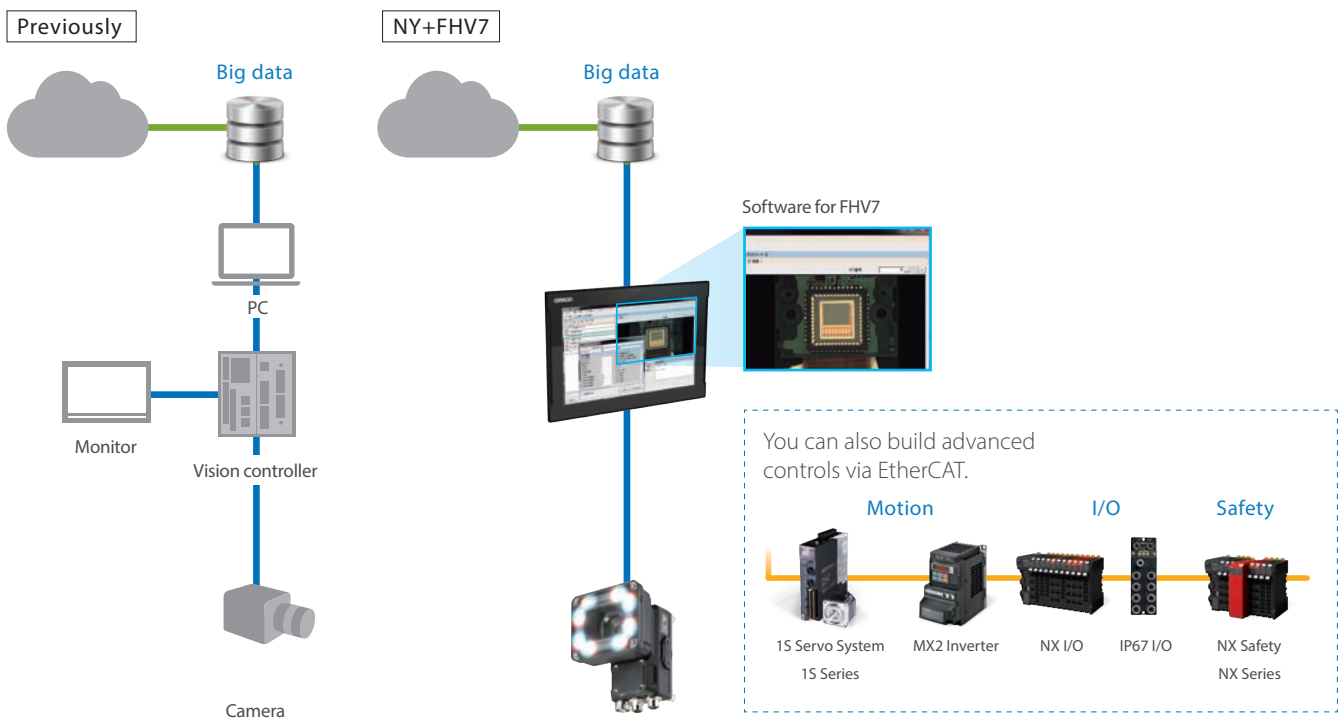

\* A separate unit is required to connect the FHV7 to EtherCAT.

## Features of FHV7

### Flexibly accommodates object changes

The camera lineup includes the best-in-class resolution\* 12 Mpix camera. Its multi-color light and autofocus lens accommodate object variations. \*Omron survey as of October 2018.

**Multi-color Light:** Accommodates color variations

R G B IR

COOL

**Autofocus Lens:** Accommodates size variations

Working distance  
90 mm → 100 mm

Water

### Advanced image processing functions

Most frequently used processing items come standard, according to customer usage of the high-spec FH Vision System, enabling advanced image processing.

**Image input + filtering (18 items)**

Dynamic Range (HDR)

Stripe Removal Filter

Even Emphasis Unevenness

**Measurement (27 items)**

2D Code

OCR

Shape Search





Sysmac is a trademark or registered trademark of OMRON Corporation in Japan and other countries for OMRON factory automation products.

Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/ or other countries.

EtherCAT® is a registered trademark of Beckhoff Automation GmbH for their patented technology.

EtherNet/IP™, DeviceNet™ are trademarks of the ODVA.

Windows is a registered trademark of Microsoft Corporation in the United States and other countries.

The SD and SDHC logos are trademarks of SD-3C, LLC.

CFAST is a registered trademark of CompactFlash Association.

Intel, Atom, Celeron, Core, and Xeon are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

DisplayPort is trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.

Other company names and product names in this document are the trademarks or registered trademarks of their respective companies.

The product photographs and figures that are used in this document may vary somewhat from the actual products.

**Note: Do not use this document to operate the Unit.**

## **OMRON Corporation Industrial Automation Company**

**Kyoto, JAPAN**

**Contact : [www.ia.omron.com](http://www.ia.omron.com)**

### **Regional Headquarters**

#### **OMRON EUROPE B.V.**

Wegalaan 67-69, 2132 JD Hoofddorp

The Netherlands

Tel: (31) 2356-81-300 Fax: (31) 2356-81-388

#### **OMRON ELECTRONICS LLC**

2895 Greenspoint Parkway, Suite 200

Hoffman Estates, IL 60169 U.S.A.

Tel: (1) 847-843-7900 Fax: (1) 847-843-7787

#### **OMRON ASIA PACIFIC PTE. LTD.**

438B Alexandra Road, #08-01/02 Alexandra

Technopark, Singapore 119968

Tel: (65) 6835-3011 Fax: (65) 6835-3011

#### **OMRON (CHINA) CO., LTD.**

Room 2211, Bank of China Tower,

200 Yin Cheng Zhong Road,

PuDong New Area, Shanghai, 200120, China

Tel: (86) 21-6023-0333 Fax: (86) 21-5037-2388

**Authorized Distributor:**

©OMRON Corporation 2016-2023 All Rights Reserved.

In the interest of product improvement,  
specifications are subject to change without notice.

**CSM\_6\_1**

**Cat. No. P118-E1-15** 0823 (0716)