

Bringing technology to life



Fast, efficient development with the Sysmac automation platform

One machine control through one connection and one software is how we define the Sysmac automation platform.

With this concept, the Sysmac automation platform provides a seamless link between the devices in the machine control network and the field communication network.

The NA Series has been developed based on this concept as well. With Sysmac Studio that manages everything, the NA Series boosts development productivity in programming environment.

One Software

One Integrated Development Environment Software - Sysmac Studio



Your programming environment will be endowed with higher development productivity with Sysmac Studio, which is the centerpiece of the Sysmac Platform to bring together all areas of automation including: logic, motion, vision, safety and visualization. Controlling everything of the machine through one integrated project, Sysmac Studio speeds up interface development by using each

device's design data seamlessly in all devices.

Integrated testing through simulation of programs on controller and the NA Series at the same time makes debugging quicker, reducing the time it takes to launch your machine.

1S AC Servo System



NJ/NX/NY Controller





One Connection

Seamless between communication and machine control networks

EtherCAT®, which links servo drivers, I/O and other field network devices into one, is used as the machine control network to enable fast, precise control. The machine automation controller comes standard with built-in EtherCAT and EtherNet/IP.

The two networks with one connection purpose and integrated safety are the perfect match between fast real time machine control and data plant management.

Equipped with an EtherNet/IP™ port as standard, the NA Series connects to the system easily.

One Machine Control

Powerful, yet easy to configure

One integrated controller is designed to meet extreme requirements in terms of logic sequence and motion control speed and accuracy.

Standard programming and open networks make it easy to build your automation system.

NA-series transforms machine data into information, shows information and controls devices based on requirements at FA manufacturing sites.

Flexible operation environment with no location/device constraint

The NA Series expands the lineup, functionality and controller compatibility to enable status monitoring and operation not limited by devices or locations.


NA5

A range of options, functionality and refined design


Widescreen variations of 7, 9, 12 and 15 inches are available.

Designed for field operability, the NA5-V2 is lighter than the predecessor ^{*1} and has a 16,770k-color high-resolution display and a resistive touch panel working with gloves.

Additionally, design is coordinated to unify the Sysmac products.

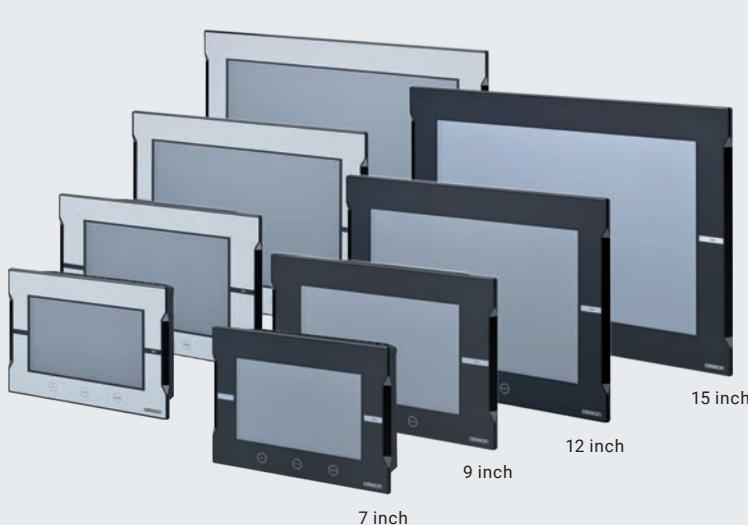

About up to
80%
lighter than the
predecessor ^{*1}

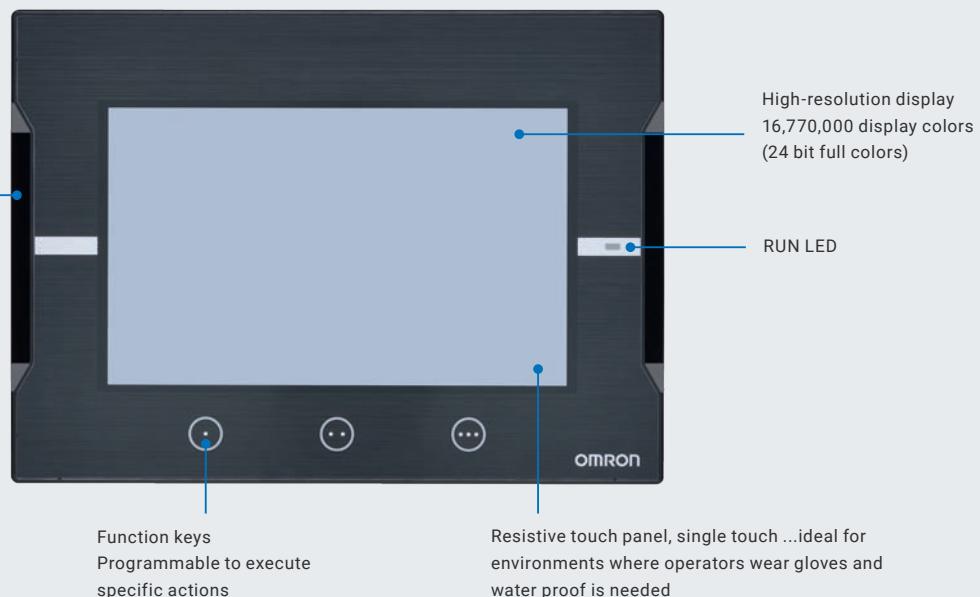


*1. The predecessor refers to the NA5-V1.

Soft-NA

The NA5 works on Windows

Soft-NA provides equivalent functionality to NA5. This Windows application can be used with a wide variety of hardware including a large monitor and environment-resistant monitor.

It is possible to run both your own data collection program and Soft-NA. This allows for visualization of machine data helps reduce downtime, allowing for rapid response to changing user needs.

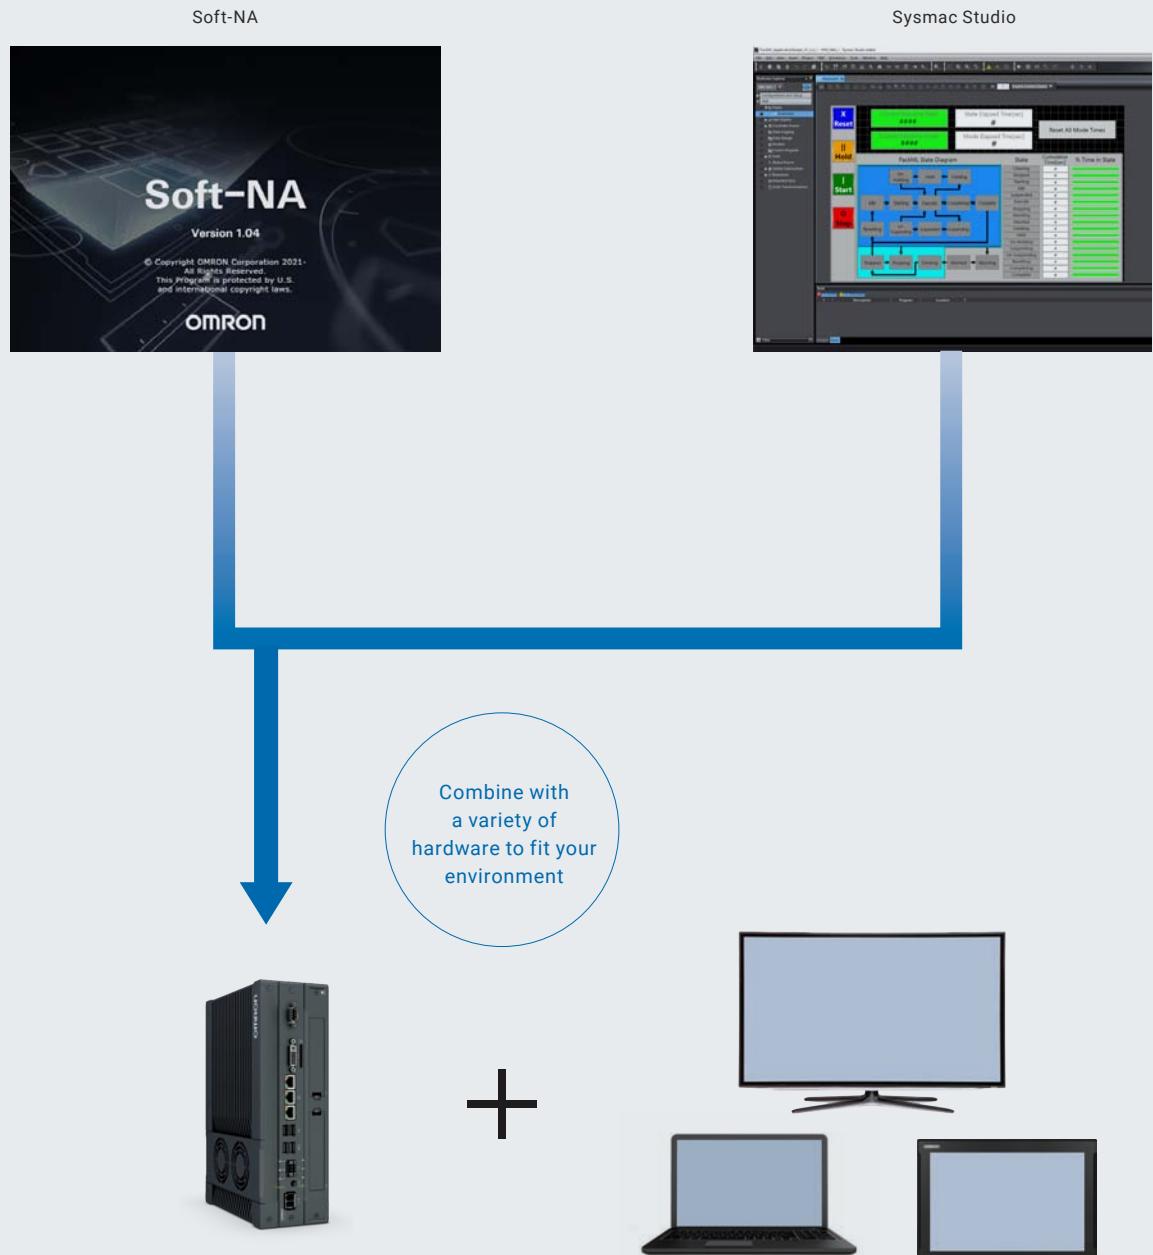

Powerful support for your machine design and operation

Inheriting previous features, the NA5-V2 enhances development efficiency and productivity with your machine. The NA Series keeps advancing to be more useful and easier to use in each phase of machine design and operation.

Machine design

Program advanced functions with a general-purpose language, customize keypads, and create flexible screens with localized settings from a global perspective. Also, debugging is possible together with the controller by Integrated Simulator and this speeds up machine development.

Flexible to your needs

Visual Basic

Visual Basic, which is a popular, easy-to-learn scripting language, is used. With its help that lets you easily program complex process, program advanced functions and tasks that you cannot achieve with standard objects. Special device communication and information processing built to customer requirements increase customer satisfaction.

```
'IAG Code behind - Add local subroutines for the IAG.

Public Function RunMotor(bStatus As Boolean) As Double
    'start motor at default speed
    mySpeed = 50
    'return current speed
    RunMotor = 50

End Function

Public Function IncreaseSpeed(nIncrement As Integer) As Double
    ' Increase speed by increment if < 1000
    If mySpeed + nIncrement < 1000 Then
        mySpeed = mySpeed + nIncrement
    Else
        'Otherwise set to top speed
        mySpeed = 1000
    End If
    'Return new speed
    IncreaseSpeed = mySpeed
End Function
```

Executing a subroutine with multiple threads



Some subroutines require time due to repeated processing or waiting time.

Even such a subroutine can be executed during screen update, without affecting operability and visibility.

Subroutine XX
Dim I as Integer
Dim Val as Integer =0
For i=0 to 100000
Val=i
Next
This process is repeated 100,000 times.

For i=0 to 100000
Val=i
Next

For i=0 to 100000
Val=i
Next

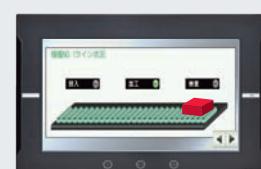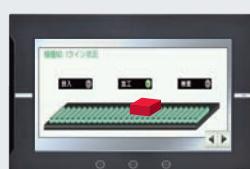

The subroutine is
executed in parts while
the screen is updated.

The subroutine is
executed in parts while
the screen is updated.


Keypad customization

Create your own keypad suitable for your applications; change the keypad size, choose only the keys you need, and customize the keys to execute specified actions.

Create your own keypad suitable for your applications.


Changing the keypad size

The size can be changed to suit the user's needs.

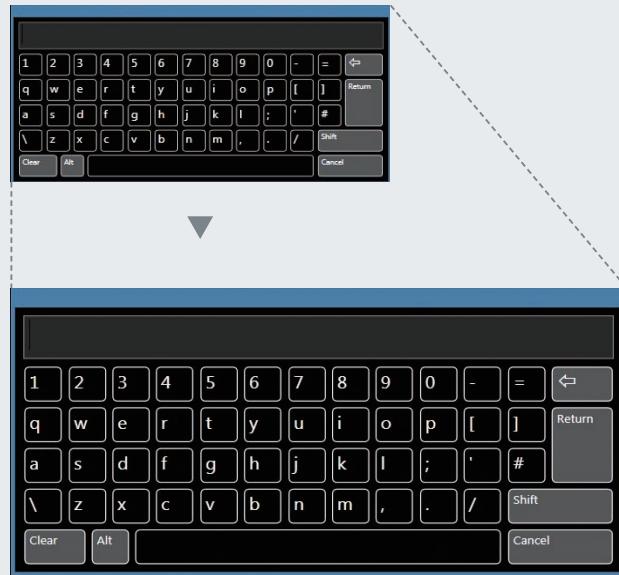

Creating user's own keypad

Only the keys the user needs can be chosen, and the keys to execute specified actions can be customized.

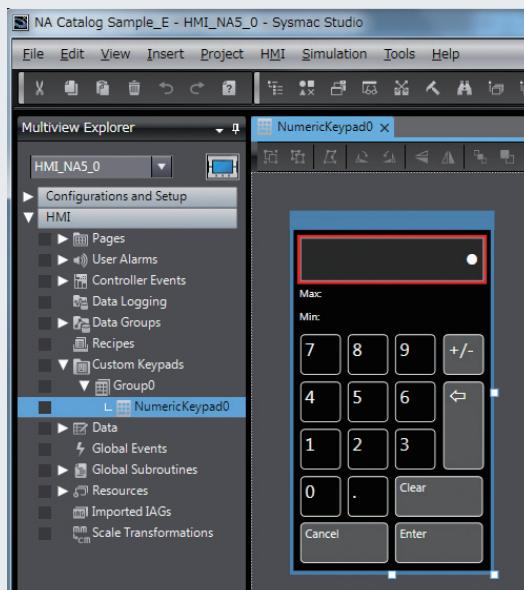


Design Standardization

IAG (Intelligent Application Gadgets)


IAGs structure projects and enhance the efficiency of their reuse. From simple graphics to complex objects, you can make your own collections and share them between projects, like a Function Block. Once created and evaluated, IAGs can be reused in projects, making development faster and easier in securing design quality with less design errors. As with many graphic objects, embed code within an IAG for easier and speedier screen development process.

To extend the functionality of the NA Series, download IAG collections from Omron's website.

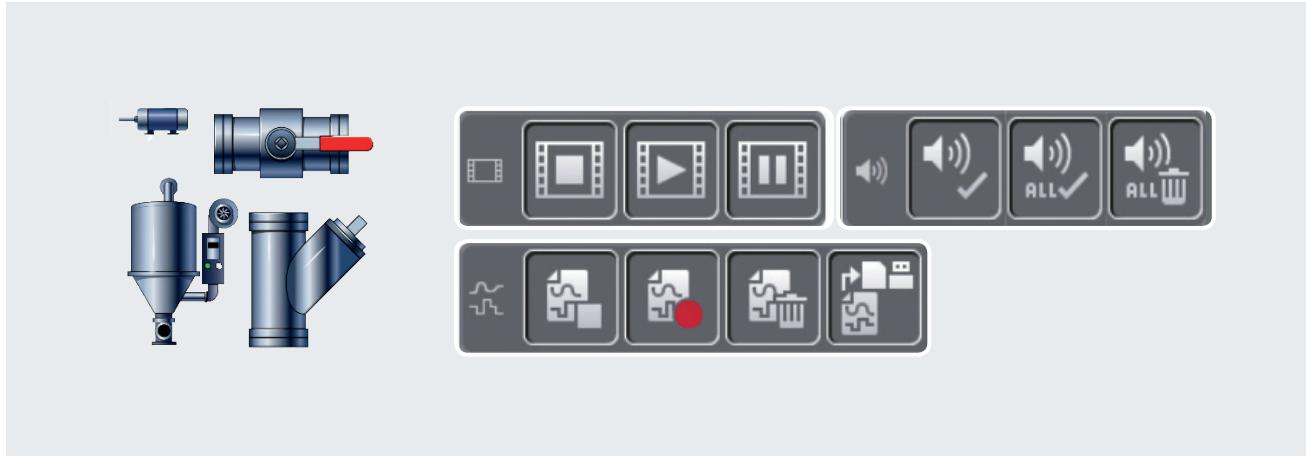


Importing and exporting pages

Pages can be saved as library files and reused individually in other projects.

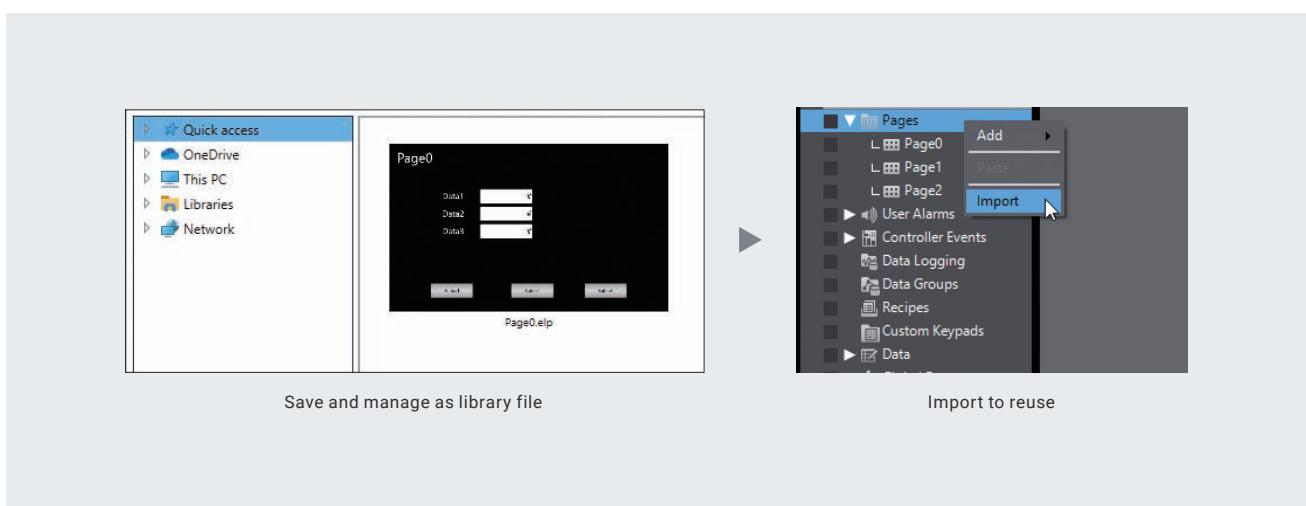

Custom object registration

Once specified, objects can be saved in Toolbox. You don't need to bother opening the page from which to copy objects, but just insert them directly from Toolbox.

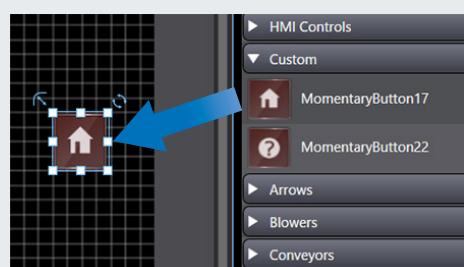


Quicker and Easier Debugging

Integrated Simulator

Machine Automation Controller Simulator and NA HMI Simulator can be displayed on one screen.


You can quickly debug the controller program and the HMI application at the same time. And immediate debugging during simulation before building will prevent you from forgetting to correct errors and reduce the frequency of building.

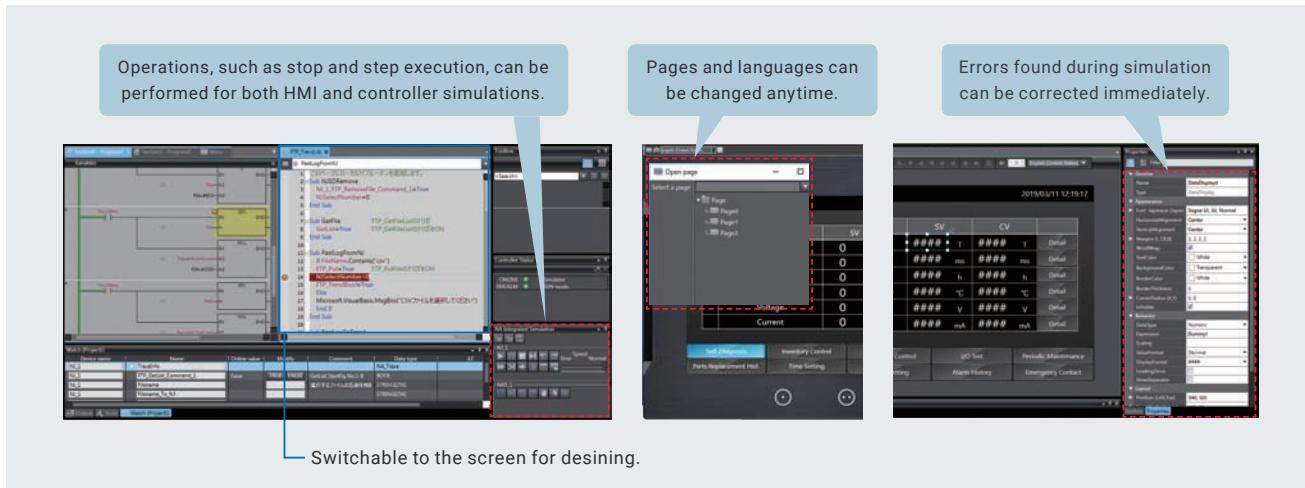

Cross references


The same GUI for the cross reference function as Machine Automation Controller can be used.

When a variable is clicked in the global variable table, a list of the locations where the variable is used is displayed in the Cross Reference Tab Page. By clicking the location, you can access the object, subroutine, or ladder program where the variable is used across the entire project. This makes screen design and debugging quicker and easier.

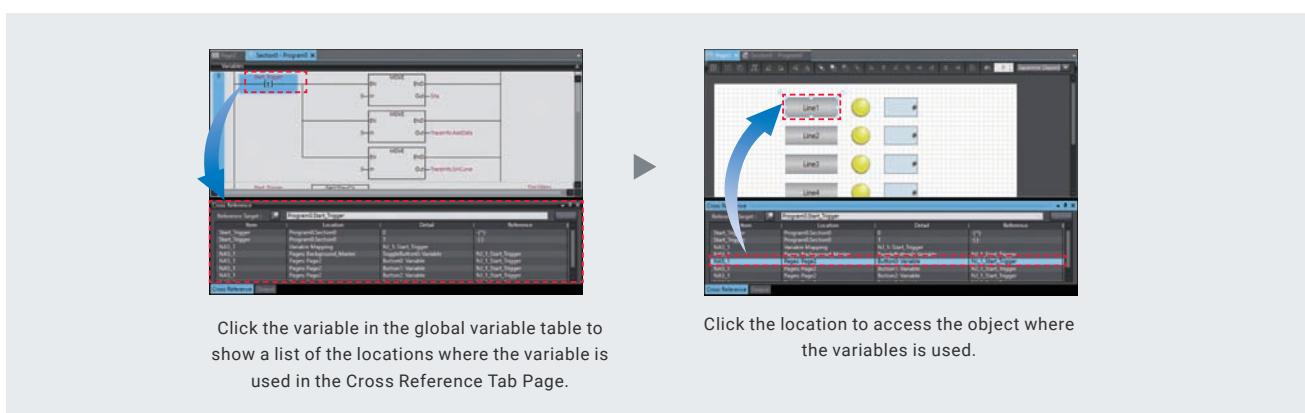

Search and Replace


You can search and replace text strings in all subroutines (Visual Basic), objects, and variables within a project. It is quick and easy to edit and debug variable names and switch labels.

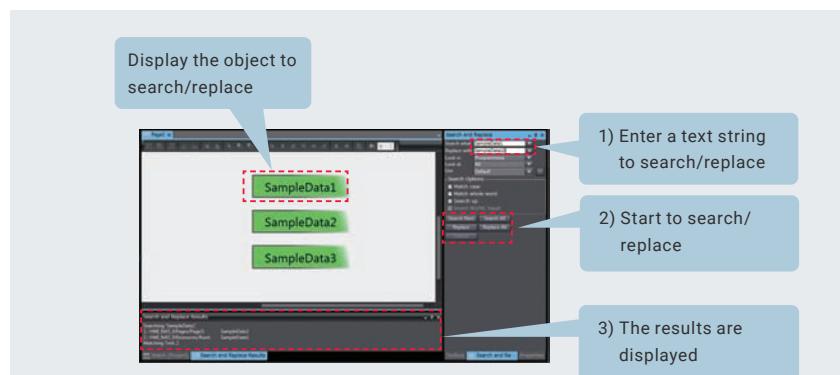

Overseas Delivery Support

Multilingual text fonts supported

As the system language for the keypad, nine languages including Japanese, simplified Chinese and Korean are supported. More project languages are supported for labels and buttons. You can set font formats, sizes and styles for each language. Select a font suitable for the language that you select. Also the font of a specified object can be changed according to language.

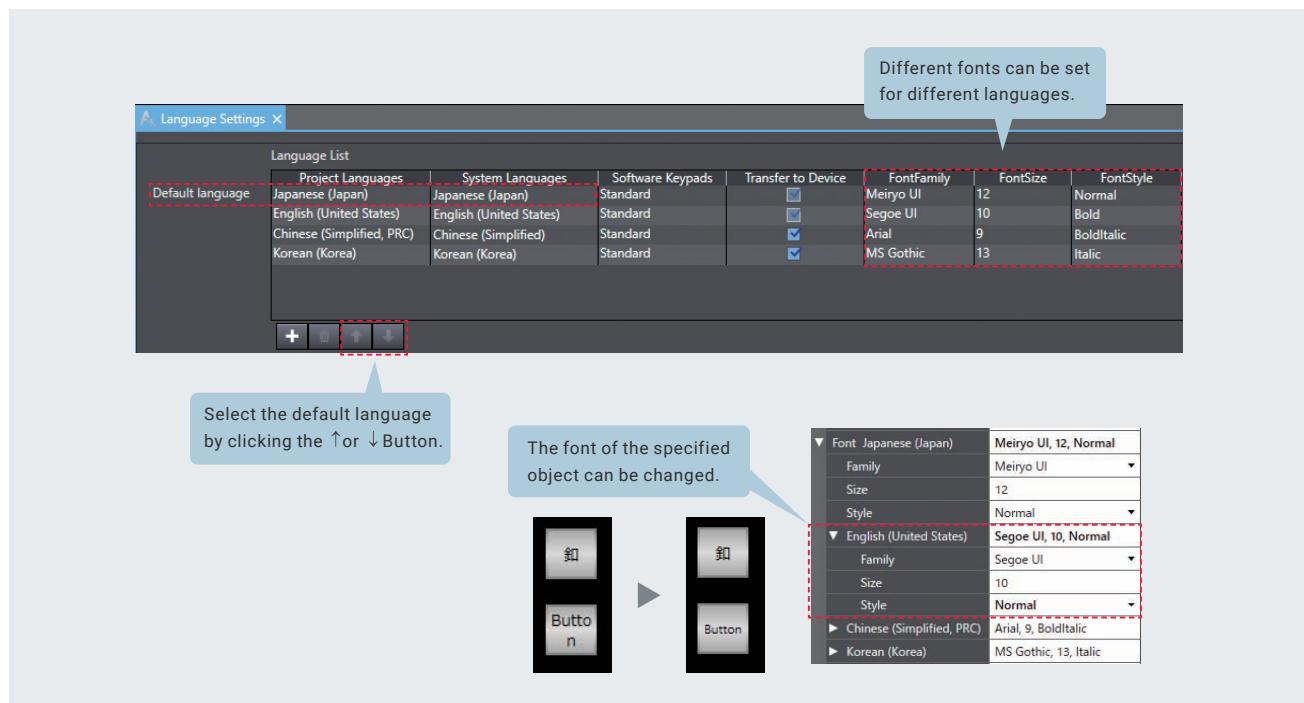


Supporting Asian languages

An Asian language - Japanese, simplified Chinese, traditional Chinese, or Korean - can be selected to use in the keypad of the NA Series.

The keypad language changes automatically when the language is changed in the language settings.


Local languages can be used to input the names of products when new recipes of the food packaging machine are added.

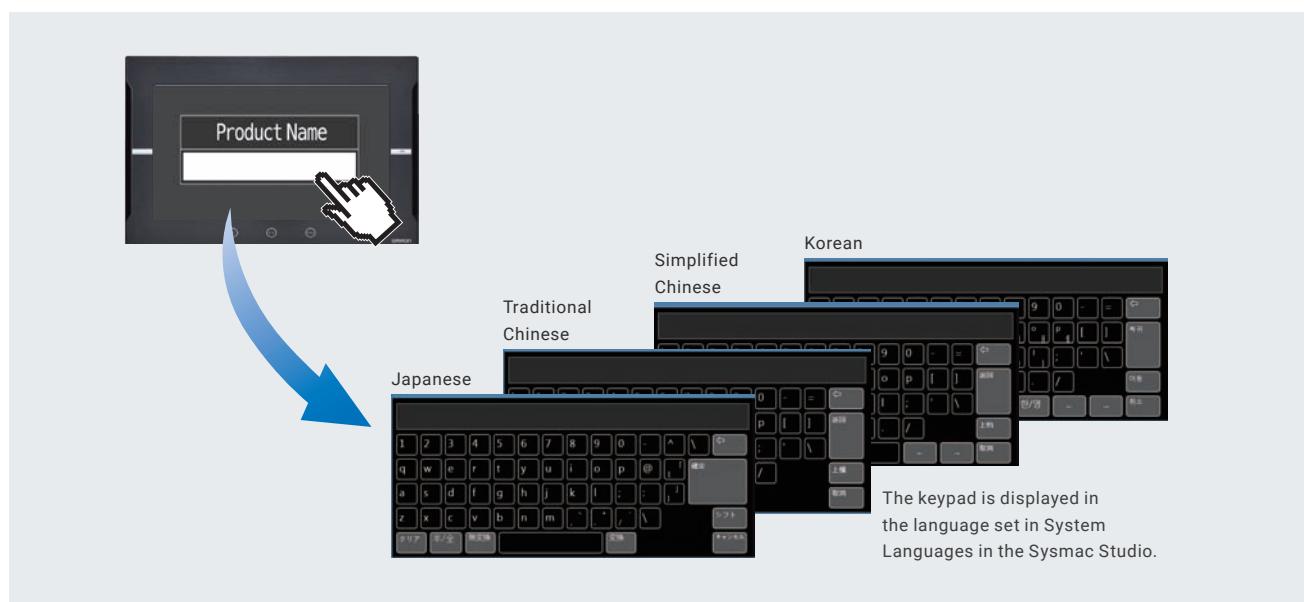

Resource management

In addition to entering a text string directly in properties, you can assign an ID first and enter a text string later. This resource ID-based management enables you to standardize screens first and then enter all text strings edited in Excel to suit machine specifications. Multiple properties can be edited at once in Excel, making resource editing easier, faster, and more precise.

Standardized screen master data

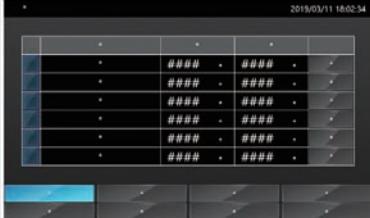

Screen data according to machine specifications




Properties window showing a button's properties. A callout bubble says: "Enter only the ID in the properties." A dashed red box highlights the "Resource ID" field.

Fixedness Temporary input

Import to change

Edit text strings in Excel during machine design

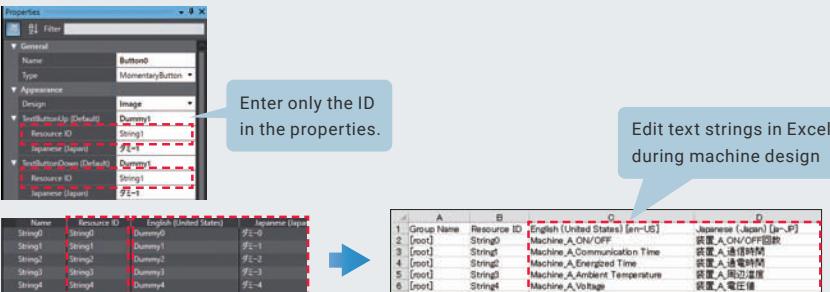


Standardized screen layout




Copy

Efficiently add pages of the same layout

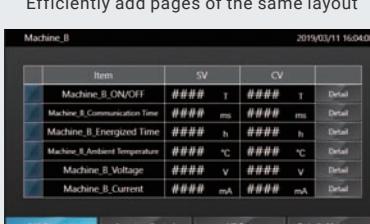

Change multiple variables and resource IDs at once.

Change multiple text strings in different languages at once.

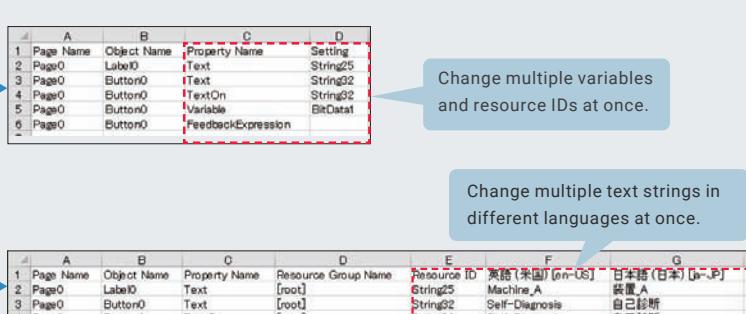


Machine Operation

The NA5-V2 monitors machine status in case of possible trouble so your customers can use your machine with no worry.

Quick Troubleshooting + No Need of Maintenance

Troubleshooter

The Troubleshooter on the NA Series allows you to directly monitor and release Machine Automation Controller errors and events as well as the user-defined errors and events.

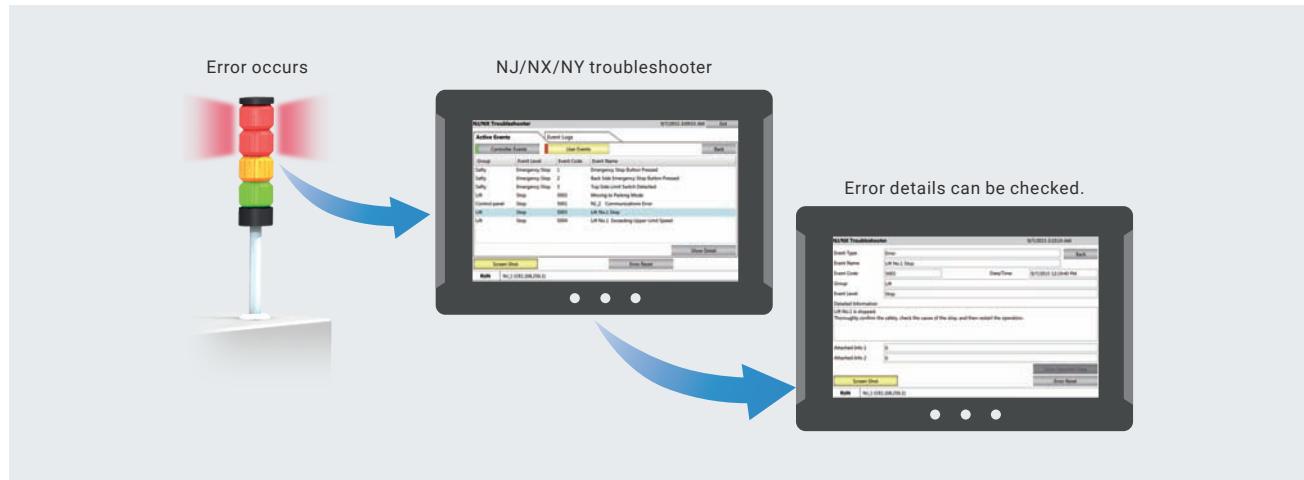


Safety Monitor

Efficiently monitor the entire system status including safety devices.


The exposed variables used in safety programs can be listed. You can easily monitor the safety system status via safety controller output (error) associated with input (cause/condition).

To efficiently show the I/O status of safety systems, the NA5-V2 displays the status of safety CPU units and the detailed information of mapped safety I/O units.

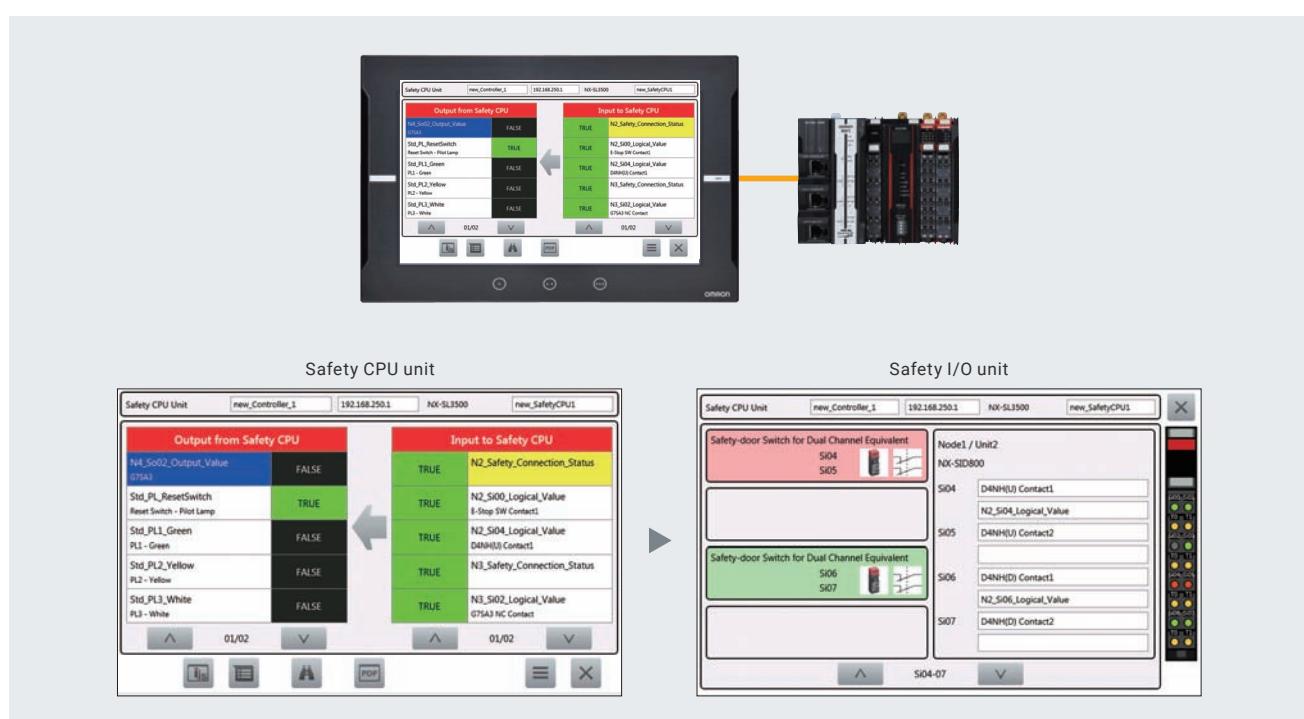

No Need of Battery Replacement


With no use of battery, the NA5-V2 facilitates export formalities. The RTC operates alone for max 10 days and this saves your customers the battery replacement man-hours and control.

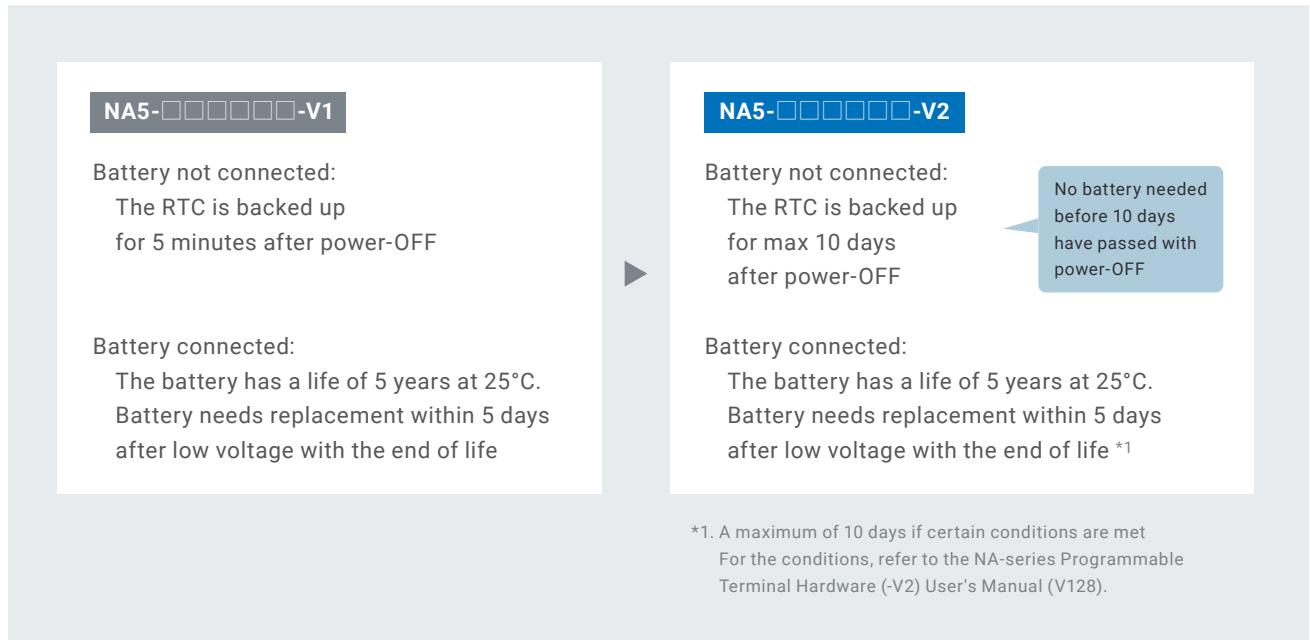

Remote access

You can view and operate the HMI installed at production sites from your tablet using Ethernet or WiFi.

The access of remote devices can be managed and limited with white list filtering (IP/MAC addresses) to prevent accidental operation and information leakage while securing accessibility.

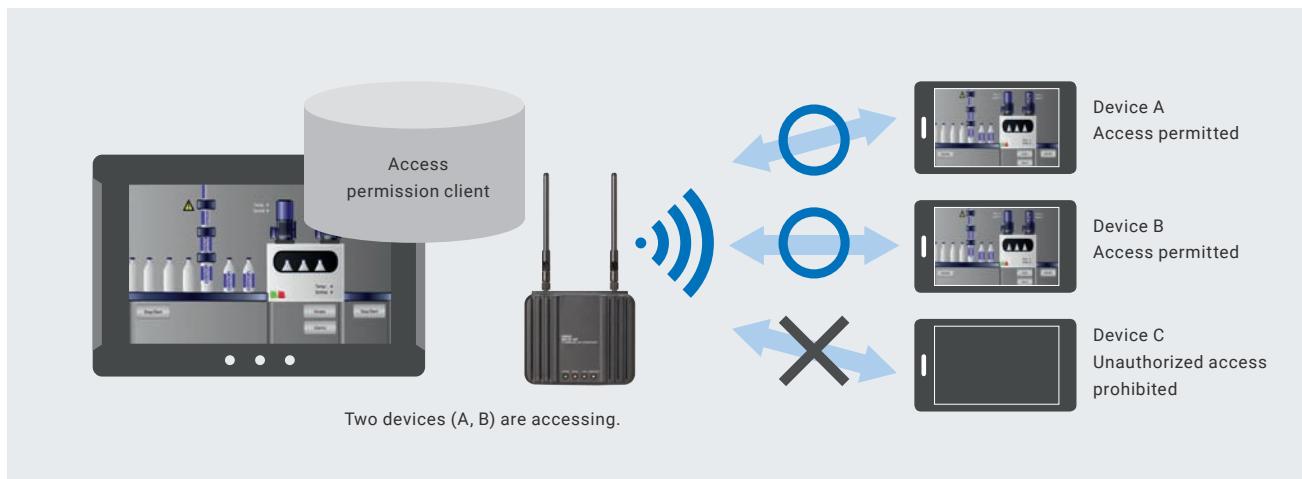

User Accounts & Access Control

The NA Series can be configured to specific staff, with multi access levels with password protection.


This ensures authorised people interact with the machine.



FTP

Retrieve log/alarm information stored in the NA Unit's memory card or USB memory device from an office PC.
(FTP server function)

You can send log information from the NA to an external FTP server. (FTP client function)

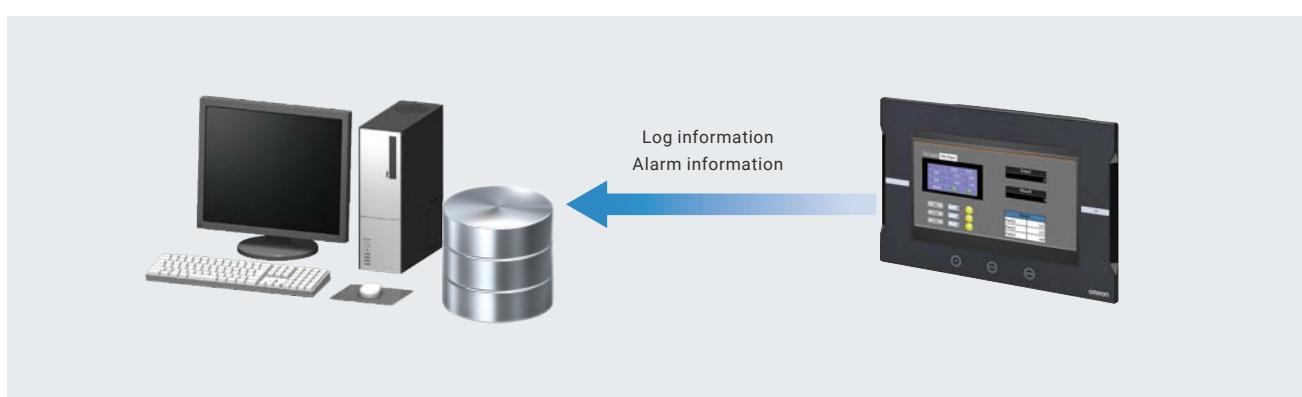


General Functions

Operation Log

The system events that the NA Series detects and the operations that operators perform on the HMI can be logged.

The logs can be displayed on the NA Series, and can also be saved as CSV files to display them on your PC.

You can see who and when did what in a chronological order, helping you analyze errors.

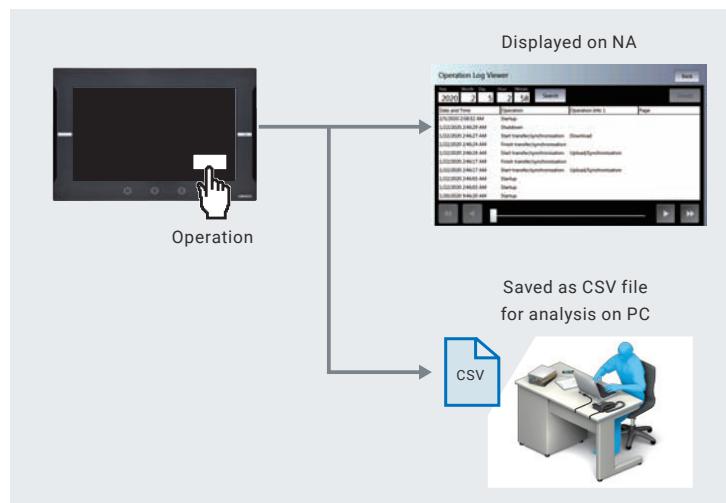

Alarm

You can "sort" alarms by the preset item and "filter" by any keyword.

The error location can be quickly identified from a large number of alarms.

Example: Filtering

Show level 3-5, 7 and Information

FilterByPriority

DefaultSortColumn

DefaultSortOrder

Layout

Position (Left, Top)

Size (Width, Height)

Security

AccessLevel

VisibilityLevel

Host Properties

User Fault Level 1

User Fault Level 2

User Fault Level 3

User Fault Level 4

User Fault Level 5

User Fault Level 6

User Fault Level 7

User Fault Level 8

User Information

Select the fault level to display.

Date and Time	Message	Priority
2/24/2016 10:51:33 AM	Setting Error	Information Level
2/24/2016 10:51:29 AM	Communications Error	Level 7
2/24/2016 10:51:22 AM	Battery Error	Level 3

The filtered alarms are displayed.

The page to switch can be specified in each alarm setting.

When an alarm occurs, you can check the troubleshooter screen by selecting the displayed alarm.

Group0

Name	Alarm ID	Alarm Code	Expression	Priority	Message	Popup	Acknowledge	Page
A1	Group0_A1	Alarm1=True	User Fault Level 1	Alarm1				Page6
A2	Group0_A2	Alarm2=True	User Fault Level 1	Alarm2				Page5
A3	Group0_A3	Alarm3=True	User Fault Level 1	Alarm3				Page4
A4	Group0_A4	Alarm4=True	User Fault Level 1	Alarm4				Page3
A5	Group0_A5	Alarm5=True	User Fault Level 1	Alarm5				Page2

The page to switch can be specified in each alarm setting.

Date and Time

Message

Priority

Group

9/3/2015 5:31:14 PM

Alarm1

Level 1

Group0

9/3/2015 5:31:14 PM

Alarm2

Level 1

Group0

9/3/2015 5:31:13 PM

Alarm1

Level 1

Group0

PageJump

Abnormal details

Work 2 is missing.
Charge the material after confirming the safety.

Back

Select the alarm and then click the Page Jump Button.


The specified page is displayed.

Programmable Terminal NA series

Bringing technology to life

The NA-series Programmable Terminal transforms machine data into information, shows information and controls devices based on requirements at FA manufacturing sites.

The NA Series, together with the NJ/NX/NY-series Controller and the Automation Software Sysmac Studio, allows you to simply and flexibly create sophisticated user interfaces to suit your machines.

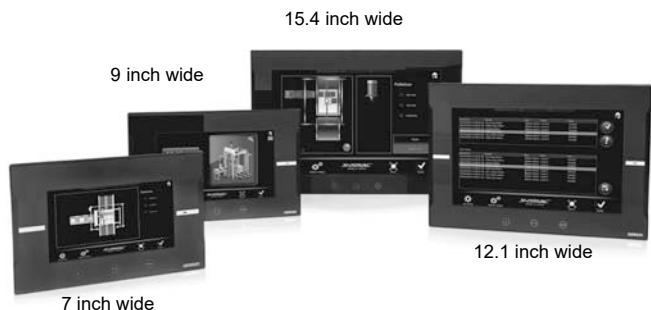


Features

- Widescreen in all models: 7, 9, 12, and 15 inches
- More than 16 million color display for all models and 1280 x 800 high resolution display for the 12 and 15-inch models
- Multimedia including video and PDF
- 2 Ethernet ports capable of simultaneous access from both the control device and maintenance segments by separating the segments
- Sysmac Studio providing an Integrated Development Environment
- NJ/NX/NY variables sharing in the NA project and NA application testing with the NJ/NX/NY program via the Simulator to reduce development time
- Many security features including operation authority settings and execution restrictions with IDs
- Microsoft Visual Basic for versatile, flexible and advanced programming
- Software providing NA5-equivalent functionality on a PC or panel PC


System configuration

NA5

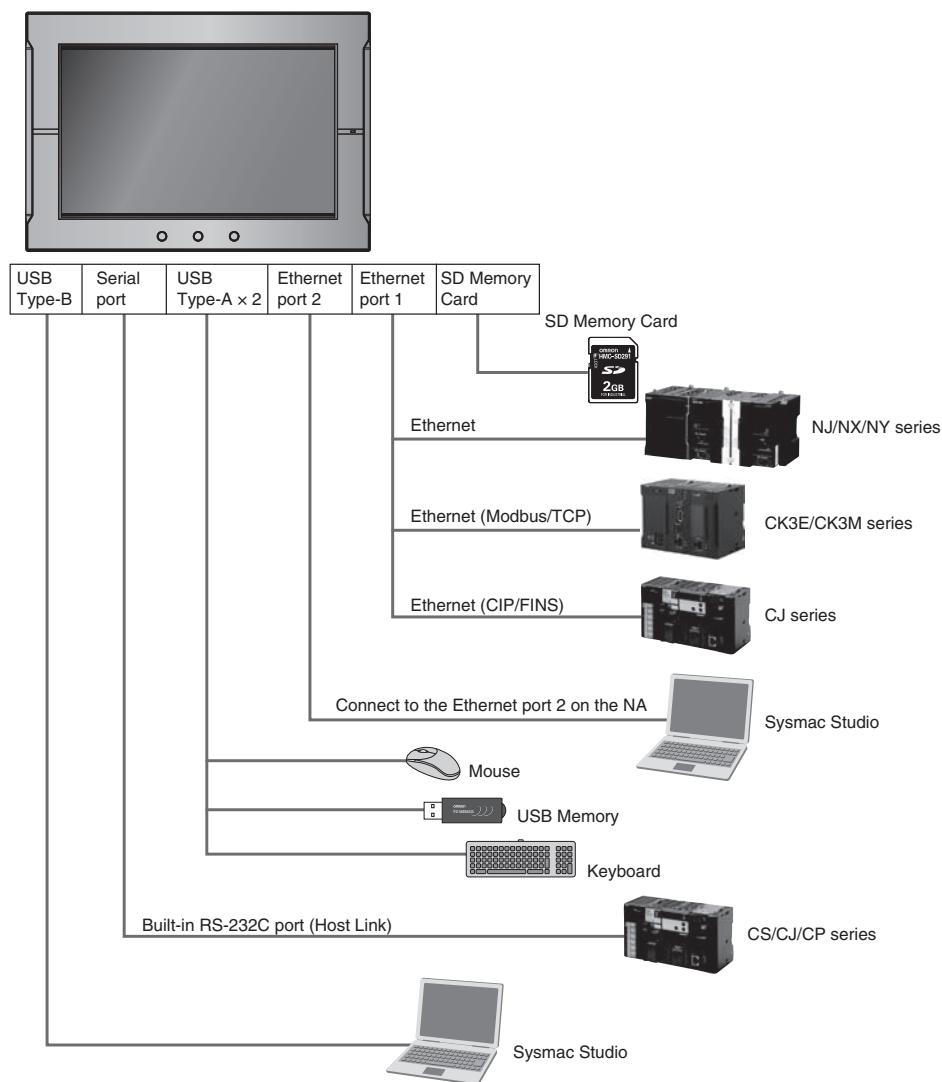

NA series

Soft-NA

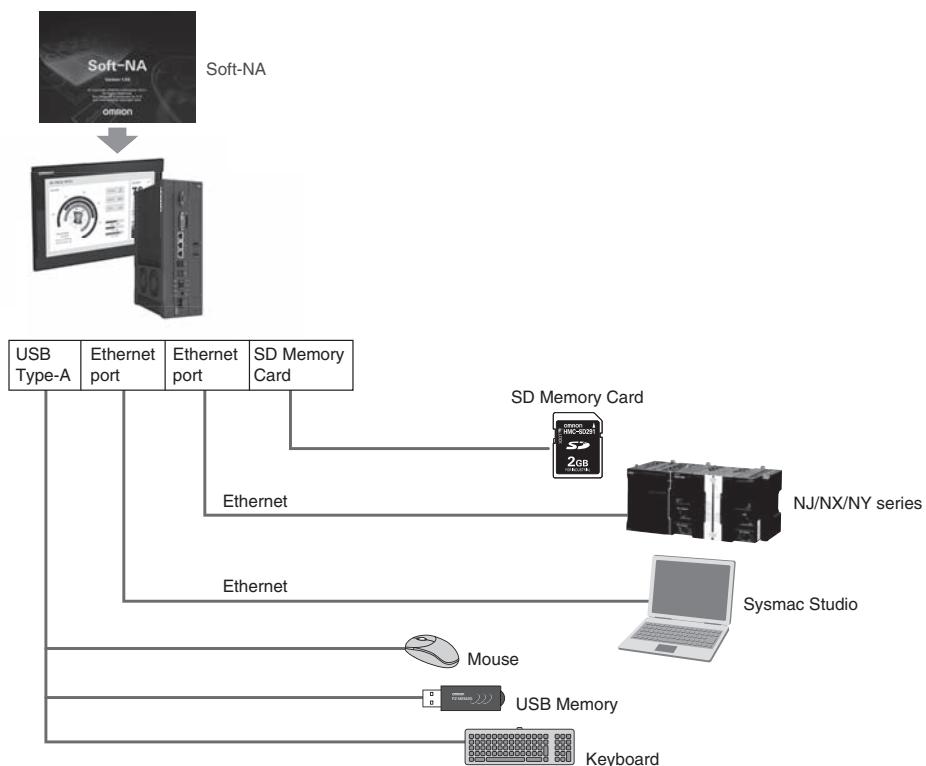

Ordering Information

NA5-□W

Product name	Specifications	Model
NA5-15W	15.4 inch wide screen, TFT LCD, 16,770,000 colors (24 bit full color), 1280 × 800 dots, Frame color : Black	NA5-15W101B-V2
	15.4 inch wide screen, TFT LCD, 16,770,000 colors (24 bit full color), 1280 × 800 dots, Frame color : Silver	NA5-15W101S-V2
NA5-12W	12.1 inch wide screen, TFT LCD, 16,770,000 colors (24 bit full color), 1280 × 800 dots, Frame color : Black	NA5-12W101B-V2
	12.1 inch wide screen, TFT LCD, 16,770,000 colors (24 bit full color), 1280 × 800 dots, Frame color : Silver	NA5-12W101S-V2
NA5-9W	9 inch wide screen, TFT LCD, 16,770,000 colors (24 bit full color), 800 × 480 dots, Frame color : Black	NA5-9W001B-V2
	9 inch wide screen, TFT LCD, 16,770,000 colors (24 bit full color), 800 × 480 dots, Frame color : Silver	NA5-9W001S-V2
NA5-7W	7 inch wide screen, TFT LCD, 16,770,000 colors (24 bit full color), 800 × 480 dots, Frame color : Black	NA5-7W001B-V2
	7 inch wide screen, TFT LCD, 16,770,000 colors (24 bit full color), 800 × 480 dots, Frame color : Silver	NA5-7W001S-V2

Options

Product name	Specifications	Model
High-pressure Waterproof Attachment *1	This metal frame is for high-pressure waterproofing. Install it to conform to UL Type 4X standards. UL Type 4X is the rating for high-pressure wash-down applications with a flow rate of 246 liter/min.	NA-9WATW01
		NA-7WATW01
Panel Mounting Bracket *1	2 units provided. To conform to UL Type 4X standard, 2 sets are required for NA5-15W□□□□-V2 and 1 set is required for NA5-12W□□□□-V2.	NA-ATT01
SD memory card	2 GB	HMC-SD292
	4 GB	HMC-SD492
	16 GB	HMC-SD1A2
USB Memory	2 GB	FZ-MEM2G
	16 GB	FZ-MEM16G
Replacement Battery	Battery life: 5 years (at 25°C).	CJ1W-BAT01
RS-232C Connecting Cable	D-sub, 9-pin plug to D-sub, 9-pin plug	Length: 2m XW2Z-200T Length: 5m XW2Z-500T
	D-sub, 9-pin plug to discrete wire	Length: 2m XW2Z-200T-3 Length: 5m XW2Z-500T-3
Anti-reflection Sheets	For the NA5-15W. Attach a Sheet to the screen to protect against diffused reflections and dirt. The entire Sheet is colorless and transparent. Five Sheets are provided in one set.	NA-15WKBA04-V2
	For the NA5-12W. Attach a Sheet to the screen to protect against diffused reflections and dirt. The entire Sheet is colorless and transparent. Five Sheets are provided in one set.	NA-12WKBA04-V2
	For the NA5-9W. Attach a Sheet to the screen to protect against diffused reflections and dirt. The entire Sheet is colorless and transparent. Five Sheets are provided in one set.	NA-9WKBA04-V2
	For the NA5-7W. Attach a Sheet to the screen to protect against diffused reflections and dirt. The entire Sheet is colorless and transparent. Five Sheets are provided in one set.	NA-7WKBA04-V2

*1. Do not use high-pressure waterproof attachments with NA5-15W□□□□-V2/NA5-12W□□□□-V2. If you use a High-pressure waterproof attachment, there is a risk of water entry, which may cause severe equipment damage.

To make NA5-15W□□□□-V2/NA5-12W□□□□-V2 conform to UL Type 4X, mount with additional mounting brackets.

Soft-NA

Product name	Specifications	Number of licenses	Media	Model
Soft-NA	The Soft-NA is software that displays information on FA manufacturing sites while providing safety, reliability, and maintainability as an industrial display on which operations can be performed as necessary.	- (Media only)	DVD	NA-RTSM
		1 license	USB dongle	NA-RTLD01
		3 licenses		NA-RTLD03
		10 licenses		NA-RTLD10

System Requirements

■When using a commercially-available PC

Item	Requirement	
OS	Windows 10 Pro Version 1903 or later 64 bit	Windows 11 Pro Version 24H2 or later
Processor	Intel Atom® x5-E3940 equivalent or higher processor *1	Intel Celeron® N4000 equivalent or higher processor *1
RAM	4 GB or more	
Free space in the hard drive necessary for installation	1 GB or more	
Optical disk drive	DVD-ROM drive *2	
Communication port	USB LAN	USB2.0 Type-A *3 Ethernet *3

*1. ARM-based processors are not supported.

*2. It is required when installing using NA-RTSM.

*3. At least one port is required. The number of required ports varies depending on the method of use.

■When using the industrial PC platform NY-series

The supported models are shown below.

- NYB□□-□□3□□ *1
- NYB□□-□□4□□ *1
- NYP□□-□□3□□-□□□□□□□□ *1
- NYP□□-□□4□□-□□□□□□□□ *1
- NYP□□-□□5□□-□□□□□□□□ *1
- NYE□□-□□N□□-□□□□□□□□ *1
- NY5□□-1□00-□□□44□□□□ *1

*1. Need to be supported only when used on the OS installed during factory dispatch.

Automation Software Sysmac Studio

The Sysmac Studio is the software that provides an integrated environment for setting, programming, debugging and maintenance of machine automation controllers including the NJ/NX-series CPU Units, NY-series Industrial PC, EtherCAT Slave, and the HMI.

For details, refer to your local OMRON website and *Sysmac Studio Catalog* (Cat. No. P138).

USB Cable

Product name	Specifications
USB Cable	Use commercially available USB cable. Specifications: USB 2.0 cable (A connector - B connector), 5.0 m max.

Recommended Network Devices

Industrial Switching Hubs

Product name	Functions	No. of ports	Accessories	Current consumption (A)	Model
Industrial Switching Hubs	Quality of Service (QoS): EtherNet/IP control data priority 10/100BASE-TX, Auto-Negotiation	5	Power supply connector	0.07	W4S1-05D

Recommended Ethernet Communications Cables

Use STP (shielded twisted-pair) cable of category 5 or higher

Product name	Recommended manufacturer	Model
Wire Gauge and Number of Pairs: AWG24, 4-pair Cable	Cables RJ45 Connectors	KETH-SB MPS588
	Kuramo Electric Co. Panduit Corporation	

Note: 1. We recommend you to use above cable and RJ45 Connectors together.

NA series

Performance Specifications

Display

Item	Specification			
	NA5-15W	NA5-12W	NA5-9W	NA5-7W
Display panel *1	Display device	TFT LCD		
	Screen size	15.4 inches	12.1 inches	9.0 inches
	Resolution	1,280 × 800 dots (horizontal × vertical)		800 × 480 dots (horizontal × vertical)
	Colors	16,770,000 colors (24 bit full colors)		
	Effective display area	331 × 207 mm (horizontal × vertical)	261 × 163 mm (horizontal × vertical)	197 × 118 mm (horizontal × vertical)
	View angles	Left: 60°, Right: 60°, Top: 60°, Bottom: 60°		
Backlight *2	Life	50,000 hours min. *3		
	Brightness adjustment	200 levels		
	Type	LED		
Front panel indicators *4	RUN	Lit green: Normal operation Lit red: Error		

*1. There may be some defective pixels in the display. This is not a fault as long as the numbers of defective light and dark pixels fall within the following standard ranges.

Model	Standard range
NA5-15W□□□□-V2	Number of light and dark pixels: 10 or less. (There must not be 3 consecutive light/dark pixels.)
NA5-12W□□□□-V2	
NA5-9W□□□□-V2	
NA5-7W□□□□-V2	

*2. The backlight can be replaced at an OMRON maintenance base.
*3. This is the estimated time before brightness is reduced by half at room temperature and humidity. The life expectancy is drastically shortened if Programmable Terminal is used at high temperatures.
*4. The brightness of the front panel indicators is also adjustable when you adjust the brightness of the backlight.

Operation

Item	Specification			
	NA5-15W	NA5-12W	NA5-9W	NA5-7W
Touch panel	Method: Analog resistive membrane type Life: 1,000,000 operations			
Function keys *1	3 inputs (capacitance inputs)			

*1. Each function key has blue indicator. The brightness of the function key indicators is also adjustable when you adjust the brightness of the backlight.

Data Capacity

Item	Specification			
	NA5-15W	NA5-12W	NA5-9W	NA5-7W
User data capacity	256 MB			

External Interfaces

Item		Specifications (Same for all models.)			
Ethernet ports	Applications	Port 1: Connecting to anything other than the Sysmac Studio, e.g., device connections and VNC clients Port 2: Connecting to the Sysmac Studio in addition to the applications of port 1.			
	Number of ports	2 ports			
	Compliant standards	IEEE 802.3i (10BASE-T), IEEE 802.3u (100BASE-TX), and IEEE 802.3ab (1000Base-T)			
	Transmission media	Shielded twisted-pair (STP) cable: Category 5, 5e, or higher			
	Transmission distance	100 m			
	Connector	RJ-45 8P8C modular connector			
USB Type-A ports *1 *2	Applications	USB Memory Device, keyboard, or mouse			
	Number of ports	2 ports			
	Compliant standards	USB 2.0			
	Transmission distance	5 m max.			
	Connector	Type-A connector			
USB Type-B port *1	Applications	Sysmac Studio connection			
	Number of ports	1 port			
	Compliant standards	USB 2.0			
	Transmission distance	5 m max.			
	Connector	Type-B connector			
Serial port	Applications	Device Connection			
	Number of ports	1 port			
	Compliant standards	RS-232C			
	Transmission distance	15 m max.			
SD Memory Card slot	Connector	D-DUB 9-pin female connector			
	Applications	To transfer or store the project or to store log data.			
	Number of slots	1 slot			
	Compliant standards	SD/SDHC			

*1. Connection to all USB 2.0-compliant devices is not guaranteed.

*2. Use a USB memory for temporary applications such as transferring data.

General Specifications


Item	Specification			
	NA5-15W	NA5-12W	NA5-9W	NA5-7W
Rated supply voltage	24 VDC			
Allowable power supply voltage range	19.2 to 28.8 VDC (24 VDC $\pm 20\%$)			
Allowable momentary power interruption time	Operation for momentary power interruption is not specified.			
Power consumption	29 W max.	28 W max.	23 W max.	19 W max.
Inrush current *1	During a cold start at 24 VDC input and room temperature 4.0 A max. 30 μ s max. *2			
Ambient operating temperature	0 to 50°C *3 *4			
Ambient storage temperature	-20 to +60°C *5			
Ambient operating humidity	10 to 90% *4 Must be no condensation.			
Atmosphere	Must be free from corrosive gases.			
Pollution degree	2 or less: Meets IEC 61010-2-201.			
Noise immunity	2 kV on power supply line (Conforms to IEC 61000-4-4.)			
Vibration resistance (during operation)	5 to 8.4 Hz with 3.5 mm half amplitude and 8.4 to 150 Hz with 9.8 m/s ² for 100 minutes each in X, Y, and Z directions (Time coefficient of 10 minutes \times coefficient factor of 10 = total time of 100 min.)			
Shock resistance (during operation)	Conforms to IEC 60028-2-27. 147 m/s ² 3 times each in X, Y, and Z directions			
Dimensions	414 \times 287 \times 69 mm (W \times H \times D)	333 \times 240 \times 69 mm (W \times H \times D)	283 \times 185 \times 69 mm (W \times H \times D)	220 \times 160 \times 69 mm (W \times H \times D)
Panel cutout dimensions	392 $^{+1}_{-0}$ \times 268 $^{+1}_{-0}$ mm (horizontal \times vertical) Panel thickness: 1.6 to 6.0 mm *6	310 $^{+1}_{-0}$ \times 221 $^{+1}_{-0}$ mm (horizontal \times vertical) Panel thickness: 1.6 to 6.0 mm *6	261 $^{+1}_{-0}$ \times 166 $^{+1}_{-0}$ mm (horizontal \times vertical) Panel thickness: 1.6 to 6.0 mm *6	197 $^{+0.5}_{-0}$ \times 141 $^{+0.5}_{-0}$ mm (horizontal \times vertical) Panel thickness: 1.6 to 6.0 mm *6
Weight	2.6 kg max.	1.9 kg max.	1.3 kg max.	1.0 kg max.
Degree of protection	IP65 oil-proof type, UL Type 4X *6 (Front-panel controls) To reinstall the NA Unit in a panel, contact your OMRON representative for replacement of the rubber packing.			
Case	Plastic			
Battery life *7	Battery life: 5 years at 25°C The RTC will be backed up for 5 days after the battery runs low. The RTC will be backed up by a super capacitor for 5 minutes after removing the old battery. (This assumes that the power is first turned ON for at least 5 minutes and then turned OFF.)			
RTC	Ambient temperature 25°C: Maximum error of ± 90 seconds per month			
International standards *8	UL61010-2-201/CSA C22.2 NO.61010-2-201: 14 *9 EMC Regulations (2004/108/EC) EN61131-2: 2007 Shipbuilding standards NK IP65, UL Type 4X *6 (Front-panel controls) UL121201, 9th Edition/CSA C22.2 NO.213-2017 UKCA KC KN61131-2 2018 RCM EN61000-6-4: 2007+A1: 2011			

***1.** The inrush current value may vary depending on the conditions. When selecting the fuse, circuit breaker, and external power supply unit, carefully think about the operating conditions and select devices with sufficient margins for the characteristics and capacity.


***2.** The inrush current is dependent on the input voltage. This current is approximately 5.5 A at 28.8 VDC.

***3.** The ambient operating temperature is subject to the following restrictions, depending on the mounting angle.


- The ambient operating temperature is 0° to 40°C when the mounting angle is 0° or more and less than 45° to the horizontal.
- The ambient operating temperature is 0° to 50°C when the mounting angle is 45° or more and 90° or less to the horizontal.
- The ambient operating temperature is 0° to 50°C when the mounting angle is 90° or more and 135° or less to the horizontal.

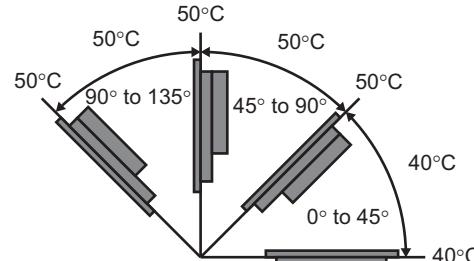

***4.** Use the Programmable Terminal within the following temperature and humidity ranges.

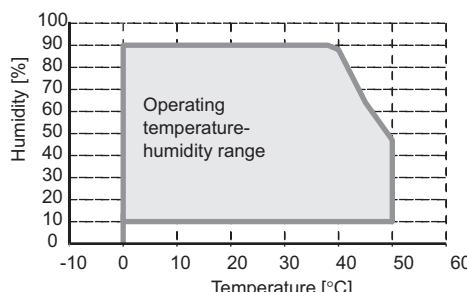

***5.** Store the Programmable Terminal within the following temperature and humidity ranges.

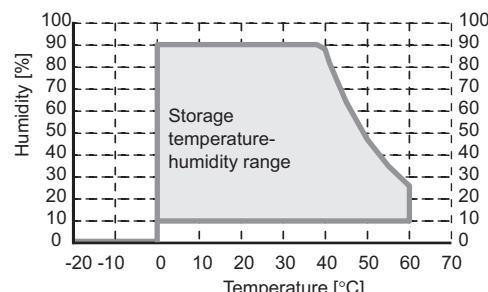

***6.** To conform to UL Type 4X standards, you may have to use the NA-□WATW01 High-pressure Waterproof Attachment (sold separately). When the NA-□WATW01 High-pressure Waterproof Attachment is used, the panel thickness is between 1.6 to 4.5 mm.

***7.** The battery is sold separately. Even when a battery is not installed, the RTC can be backed up by a built-in capacitor for a maximum of 10 days.

***8.** Check with your OMRON representative or refer to the following OMRON website for the latest information on the applicable standards for each model: www.ia.omron.com.

***9.** Use power supply Class 2 to conform to UL Standards.

NA series


Version Information

NA series and Programming Devices



NA series		Corresponding unit versions/version	
Model	NA system version	NJ/NX/NY-series Controller	
		NX701-□□□□□ NY512-□□□□□	
		NX502-□□□□□ NY532-□□□□□	
		NX102-□□□□□ NJ501-□□□□□	
		NX1P2-□□□□□ NJ301-□□□□□	
		NX-CSG320 NJ101-□□□□□	
NA5-□□□□□□□-V2	1.18 or later	NX502: 1.60 or later NX-CSG320: 1.00 or later NX102: 1.30 or later NX1P2: 1.13 or later NY512: 1.12 or later NY532: 1.12 or later NX701: 1.10 or later NJ101: 1.10 or later NJ501: 1.01 or later NJ501 Database Connection: 1.05 or later NJ301: 1.01 or later	
		1.64 or higher	

Components and Functions

Front Panel

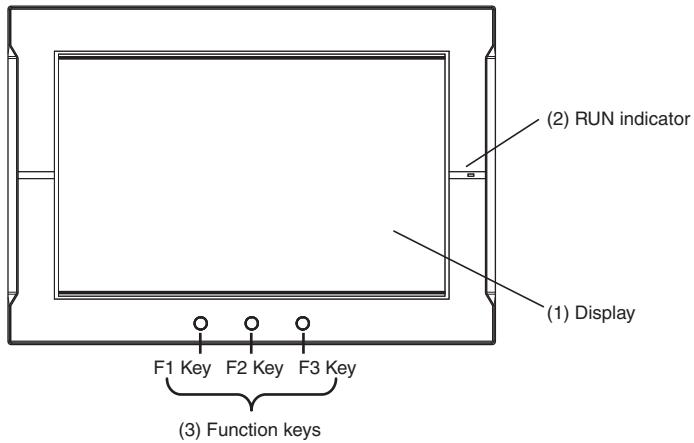

No.	Name	Description
(1)	Display	The entire display is a touch panel that also functions as an input device.
(2)	RUN indicator	The status of the indicator changes according to the status of the NA.
(3)	Function keys	<p>There are three function keys: F1, F2, and F3.</p> <p> : F1 Key,  : F2 Key,  : F3 Key</p> <p>You can use the function keys as execution conditions for the actions for global or page events. You can also use the function keys for interlocks.</p>

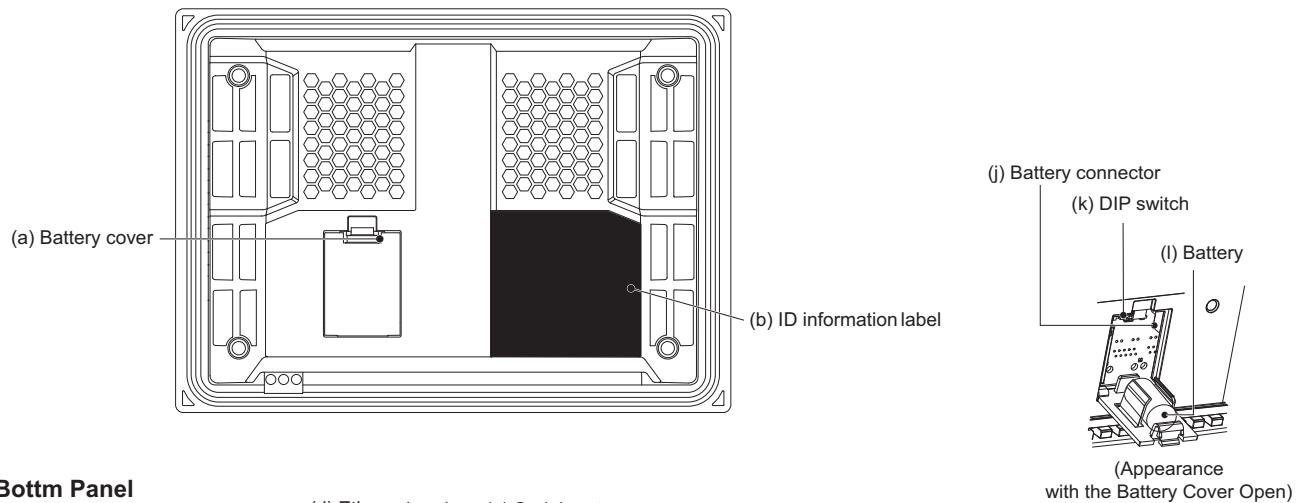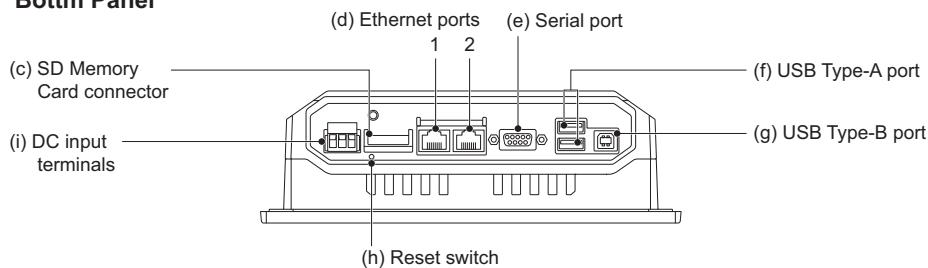Back Panel**Bottom Panel**

No.	Name	Description
(a)	Battery cover	Open this cover to replace the Battery.
(b)	ID information label	You can check the ID information of the NA Unit.
(c)	SD Memory Card connector	Insert an SD Memory Card here.
(d)	Ethernet port 1	Connect a device other than the Sysmac Studio.
	Ethernet port 2	Connect mainly the Sysmac Studio.
(e)	Serial port	Connect the connected device
(f)	USB Type-A port	Connect this port to a USB Memory Device.
(g)	USB Type-B port	Connect the Sysmac Studio or other devices.
(h)	Reset switch	Use this switch to reset the NA Unit.
(i)	DC input terminals	These are the power supply terminals. Connect the accessory power supply connector and supply power.
(j)	Battery connector	Connect the connector on the backup Battery here.
(k)	DIP switch	Used for system recovery. (The DIP switch is on a PCB that is accessed by opening the Battery cover.) In other cases, do not change any of the factory settings of the pins on the DIP switch.
(l)	Battery	This is the battery to backup the RTC in the NA Unit.

NA series

Supported Devices

NA5-□□□□□□-V2

Manufacturer	Models	Connection method	Communications driver
OMRON	NX102-□□□□□ NX1P2-□□□□□ NX502-□□□□□ NX701-□□□□□ NJ501-□□□□□ NJ301-□□□□□ NJ101-□□□□□ NY512-□□□□□ NY532-□□□□□ NX-CSG320	Built-in EtherNet/IP port	Ethernet
	NX502-□□□□□	NX-EIP201	
	CJ2H-CPU64/65/66/67/68-EIP CJ2M-CPU31/32/33/34/35	Built-in EtherNet/IP port	CIP Ethernet
	CJ2H-CPU64/65/66/67/68 CJ2M-CPU11/12/13/14/15	CJ1W-EIP21S	
	CJ2H-CPU64/65/66/67/68-EIP CJ2M-CPU31/32/33/34/35	CJ1W-EIP21	
	CJ2H-CPU64/65/66/67/68-EIP CJ2M-CPU31/32/33/34/35	Built-in EtherNet/IP port	FINS Ethernet
	CJ1H-CPU65H/66H/67H CJ1H-CPU65H/66H/67H-R CJ1G-CPU42H/43H/44H/45H CJ1M-CPU11/12/13/21/22/23 CJ2H-CPU64/65/66/67/68(-EIP) CJ2M-CPU11/12/13/14/15 CJ2M-CPU31/32/33/34/35	CJ1W-ETN21 CJ1W-EIP21	
	CJ2H-CPU64/65/66/67/68 CJ2M-CPU11/12/13/14/15	CJ1W-EIP21S	
	CS1G-CPU42H/43H/44H/45H CS1H-CPU63H/64H/65H/66H/67H	CS1W-ETN21 CS1W-EIP21	
	CS1G-CPU43H/44H/45H CS1H-CPU63H/64H/65H/66H/67H	CS1W-EIP21S	
	CS1D-CPU65H/67H/67HA/68HA/44SA/67SA	CS1W-ETN21 CS1D-ETN21D CS1W-EIP21 CS1W-EIP21S	
	CP1L-EL□□□□□-□ CP1L-EM□□□□□ CP2E-N□□D□-□	Built-in Ethernet port	Host Link
	CP1H-□□□□□-□ CP1L-L□□□□□-□	CP1W-CIF41	
	CK3E-1□10 CK3M-CPU1□1	Built-in Ethernet port	
	CS1G-CPU42H/43H/44H/45H CS1H-CPU63H/64H/65H/66H/67H CS1D-CPU65H/67H/67HA/68HA/44SA/57SA	Built-in RS-232C port CS1W-SCB21-V1 CS1W-SCB41-V1 CS1W-SCU21-V1 CS1W-SCU31-V1	
	CJ2H-CPU64/65/66/67/68(-EIP) CJ2M-CPU11/12/13/14/15/31/32/33/34/35	Built-in RS-232C port CJ1W-SCU22 CJ1W-SCU32 CJ1W-SCU42	
	CP1L-□□□□□-□ CP1H-□□□□□-□ CJ2M-CPU31/32/33/34/35	CP1W-CIF01 CP1W-CIF11 CP1W-CIF12-V1	
	CP2E-E□□D□-□ CP2E-S□□D□-□	Built-in RS-232C port	


Note: 1. Including models no longer available to order.

NA-RTLD□□


Manufacturer	Models	Connection method	Communications driver
OMRON	NX102-□□□□□ NX1P2-□□□□□ NX502-□□□□□ NX701-□□□□□ NJ501-□□□□□ NJ301-□□□□□ NJ101-□□□□□ NY512-□□□□□ NY532-□□□□□ NX-CSG320	Built-in EtherNet/IP port	Ethernet
	NX502-□□□□□	NX-EIP201	

Dimensions


NA5-15W101S-V2/-15W101B-V2

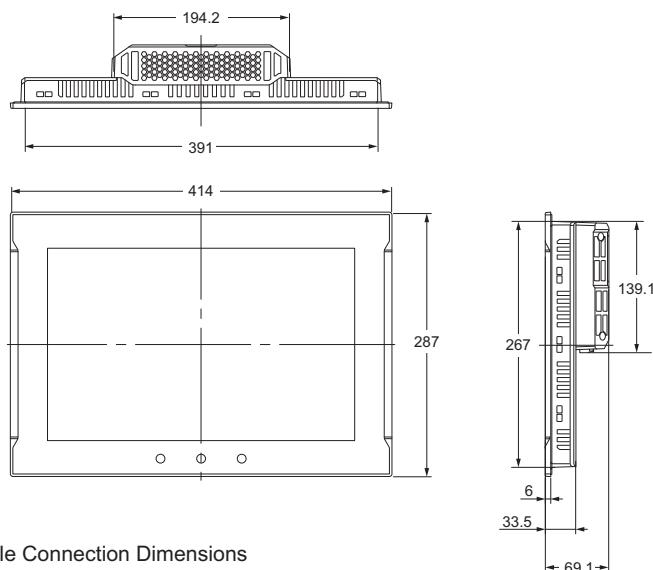


Cable Connection Dimensions

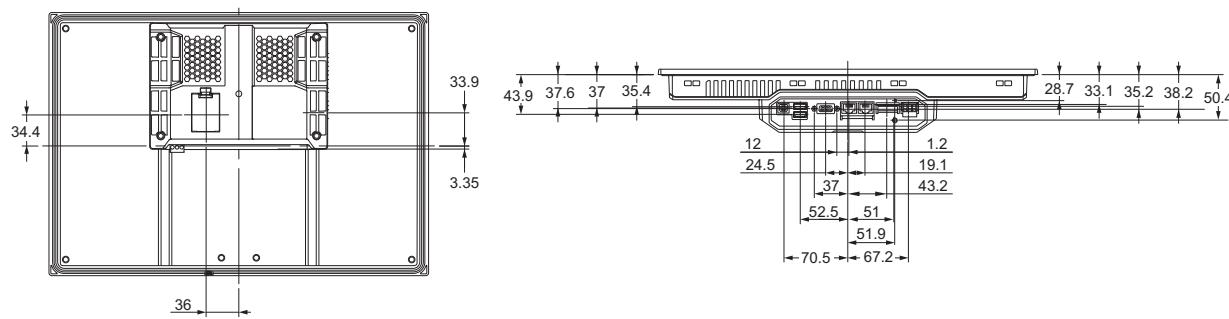

NA5-12W101S-V2/-12W101B-V2

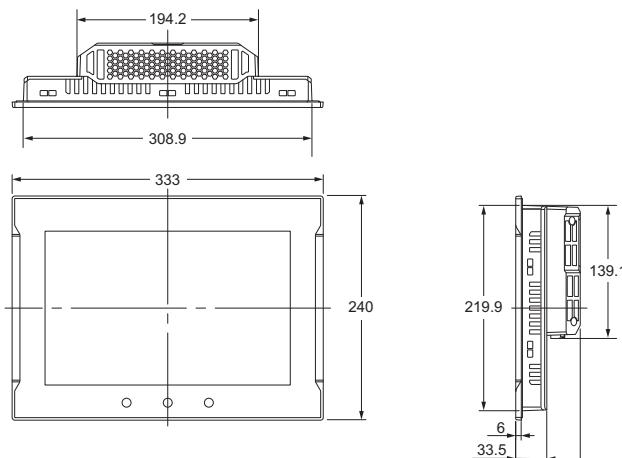


Cable Connection Dimensions

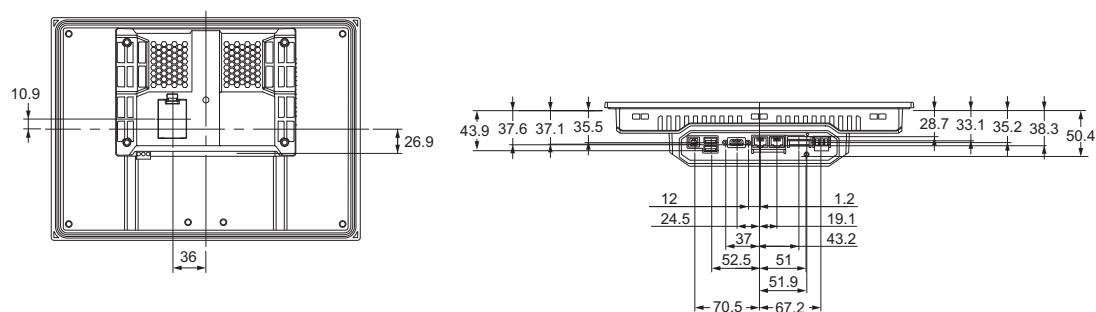


NA series


NA5-9W001S-V2/-9W001B-V2

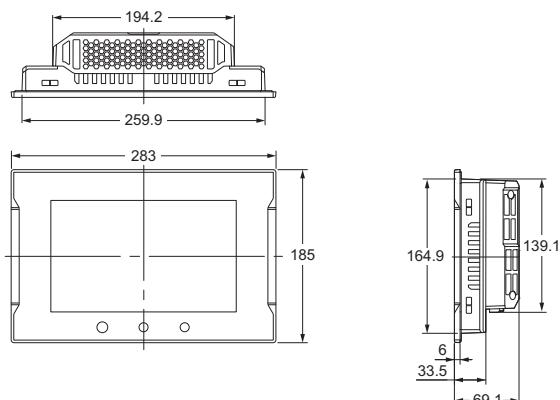


Cable Connection Dimensions

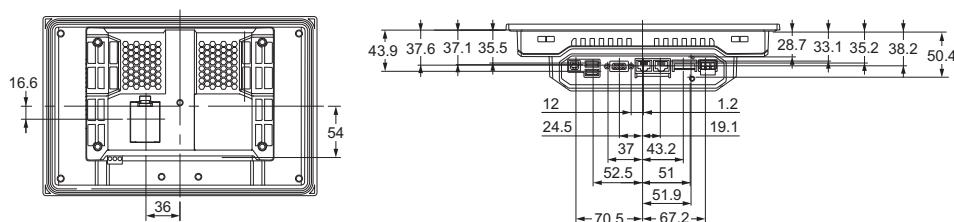

NA5-7W001S-V2/-7W001B-V2

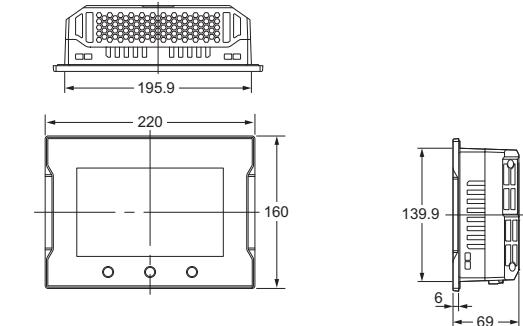

Cable Connection Dimensions

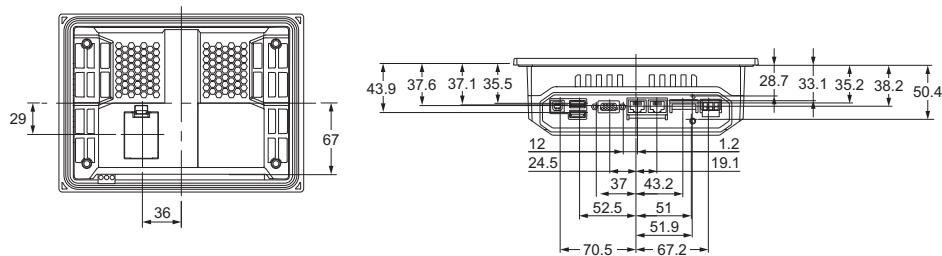

Related Manuals

Cat. No.	Model number	Manual
V128	NA5-15□101□-V2 NA5-12□101□-V2 NA5-9□001□-V2 NA5-7□001□-V2	NA-series Programmable Terminal Hardware (-V2) User's Manual
V118	NA5-15□101□ (-V□) NA5-12□101□ (-V□) NA5-9□001□ (-V□) NA5-7□001□ (-V□) NA-RTLD□□	NA-series Programmable Terminal Software User's Manual
V119	NA5-15□101□ (-V□) NA5-12□101□ (-V□) NA5-9□001□ (-V□) NA5-7□001□ (-V□) NA-RTLD□□	NA-series Programmable Terminal Device Connection User's Manual
V120	NA5-15W□□□□ NA5-12W□□□□ NA5-9W□□□□ NA5-7W□□□□	NA-series Programmable Terminal Startup Guide
V126	NA-RTLD□□□	NA-series Programmable Terminal Soft-NA User's Manual

Sysmac is a trademark or registered trademark of OMRON Corporation in Japan and other countries for OMRON factory automation products. Microsoft, Windows, Visual Basic, Word, Excel are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. EtherCAT® is registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.

EtherNet/IP™ is the trademarks of ODVA.

Celeron, Intel, Intel Atom are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

The SD logo is a trademark of SD-3C, LLC. 

Some images are used under license from Shutterstock.com.

Other company names and product names in this document are the trademarks or registered trademarks of their respective companies.

The product photographs and figures that are used in this catalog may vary somewhat from the actual products.

Microsoft product screen shot(s) reprinted with permission from Microsoft Corporation.

MEMO

Terms and Conditions Agreement

Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranties.

- (a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.
- (b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

Limitation on Liability: Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

Note: Do not use this document to operate the Unit.

OMRON Corporation Industrial Automation Company

Kyoto, JAPAN

Contact : www.ia.omron.com

Regional Headquarters

OMRON EUROPE B.V.
Wegalaan 67-69, 2132 JD Hoofddorp
The Netherlands
Tel: (31) 2356-81-300 Fax: (31) 2356-81-388

OMRON ASIA PACIFIC PTE. LTD.
438B Alexandra Road, #08-01/02 Alexandra
Technopark, Singapore 119968
Tel: (65) 6835-3011 Fax: (65) 6835-3011

OMRON ELECTRONICS LLC
2895 Greenspoint Parkway, Suite 200
Hoffman Estates, IL 60169 U.S.A.
Tel: (1) 847-843-7900 Fax: (1) 847-843-7787

OMRON (CHINA) CO., LTD.
Room 2211, Bank of China Tower,
200 Yin Cheng Zhong Road,
PuDong New Area, Shanghai, 200120, China
Tel: (86) 21-6023-0333 Fax: (86) 21-5037-2388

Authorized Distributor:

©OMRON Corporation 2025 All Rights Reserved.
In the interest of product improvement,
specifications are subject to change without notice.

CSM_1_1
Cat. No. V471-E1-01 1225 (1225)