

Product Discontinuation Notices

Sensor I/O Connectors

Issue Date
March 11, 2022

No. OEE-2022309

Discontinuation Notice of Round Connectors Model Y92E-S__PVC series.

Product Discontinuation

Model Y92E-S08PVC series

Model Y92E-S12PVC series



Recommended Replacement

Model Y92E-S08PP series

Model Y92E-S12PP series

[Final order entry date]

The end of March, 2022

[Date of The Last Shipping]

The end of April, 2022

[Difference from discontinued product]

Recommended replacement Model	Body Color	Specifications	Materials	Dimensions
Model Y92E-S _{xx} PP series	*	**	*	**

** : Compatible

* : The change is a little/Almost compatible

-- : Not compatible


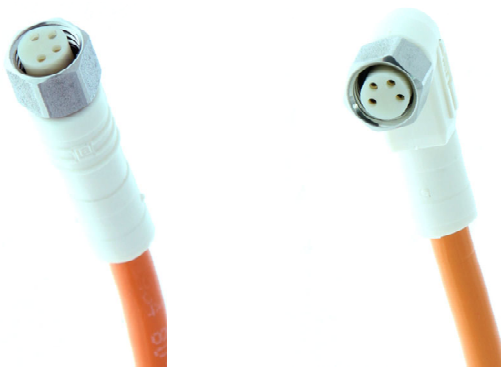

- : No corresponding specification

[Product Discontinuation and recommended replacement]

Product discontinuation	Recommended replacement
Y92E-S08PVC3A10M-L	Y92E-S08PP3A 10M
Y92E-S08PVC3A5M-L	Y92E-S08PP3A 5M
Y92E-S08PVC3S10M-L	Y92E-S08PP3S 10M
Y92E-S08PVC3S20M-L	Y92E-S08PP3S 20M
Y92E-S08PVC3S5M-L	Y92E-S08PP3S 5M
Y92E-S08PVC4A10M-L	Y92E-S08PP4A 10M
Y92E-S08PVC4A15M-L	Y92E-S08PP4A 15M
Y92E-S08PVC4A2M-L	Y92E-S08PP4A 2M
Y92E-S08PVC4A5M-L	Y92E-S08PP4A 5M
Y92E-S08PVC4S10M-L	Y92E-S08PP4S 10M
Y92E-S08PVC4S2M-L	Y92E-S08PP4S 2M
Y92E-S08PVC4S5M-L	Y92E-S08PP4S 5M
Y92E-S12PVC4A10M-L	Y92E-S12PP4A 10M

Product discontinuation	Recommended replacement
Y92E-S12PVC4A15M-L	Y92E-S12PP4A 15M
Y92E-S12PVC4A2M-L	Y92E-S12PP4A 2M
Y92E-S12PVC4A5M-L	Y92E-S12PP4A 5M
Y92E-S12PVC4S10M-L	Y92E-S12PP4S 10M
Y92E-S12PVC4S20M-L	Y92E-S12PP4S 20M
Y92E-S12PVC4S2M-L	Y92E-S12PP4S 2M
Y92E-S12PVC4S5M-L	Y92E-S12PP4S 5M

[Body color]

Product discontinuation Model Y92E-S__PVC series	Recommendable replacement Model Y92E-S__PP series
<p>M12 models</p> 	<p>M12 models</p> 
<p>M8 models</p> 	<p>M8 models</p> 

[Specifications]

Model	Product discontinuation Model Y92E-S__PVC series	Recommendable replacement Model Y92E-S__PP series
Rated current 4 A	4 A	4 A
Rated voltage	M8: 30 VDC M12 4-wire: 250 VDC	M8: 60 VDC M12 4-wire: 250 VDC
Degree of protection	IP67, IP69K	IP67, IP68, IP69K
Ambient Temperature	-25°C to +70°C	-30°C to +90°C

[Materials]

Model	Product discontinuation Model Y92E-S_PVC series	Recommendable replacement Model Y92E-S_PP series
Pin block	PVC	PP (Polypropylene)
Contacts	CuSn, nickel base, 0.3 µm gold plating	Cu/Au, 0.3 µm gold plating
Fixture	Stainless steel	Stainless steel
Cover	PVC	PP (Polypropylene)
O-ring	EPDM	EPDM

[Dimensions]

Product discontinuation Model Y92E-S_PVC series	Recommendable replacement Model Y92E-S_PP series
<p>M12 models</p> <p>M8 models</p>	<p>M12 models</p> <p>M8 models</p>

Specifications and prices in this product news are as of the issue date and are subject to change without notice. Only main changes in specifications are described in this document. Please be sure to read the relevant catalogs, datasheets, product specifications, instructions, and manuals for precautions and necessary information when using products.