


CX-Compolet / SYSMAC Gateway

Flexible & High Speed PLC-Accessing Softwares

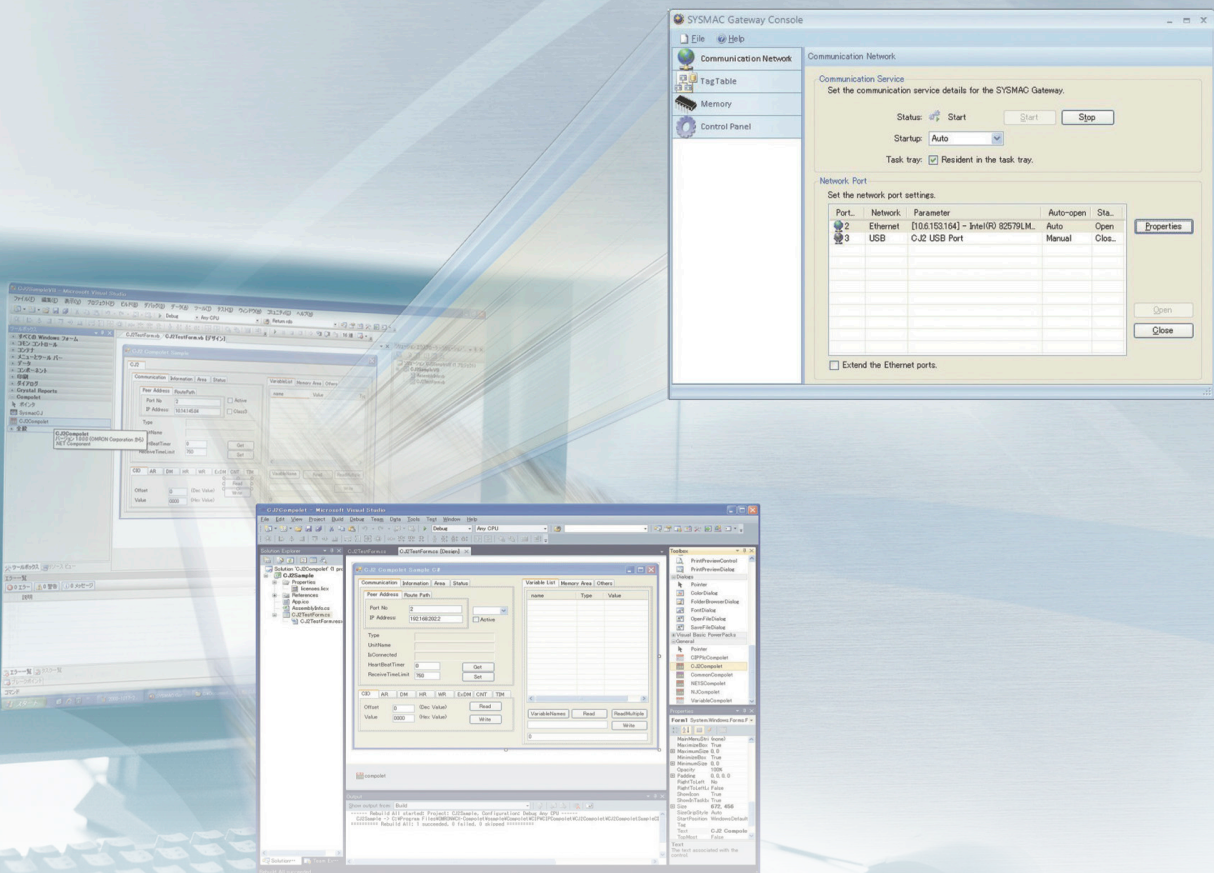


- FA Communications Software
- Direct Data link Access
- Flexible data Access

OMRON's FA Communications Software High-speed, and Direct Data Link Access

The need for faster transmission of more and more information between personal computers and PLCs is coupled with the need for frequent changes to specifications, such as address allocations in PLCs, a demand for software standardization to eliminate dependence on specific applications and networks, and a demand for cost reductions.

OMRON provides the functions to solve these problems. Data links are now possible using Ethernet. Data links can even be accessed via a LAN port on a notebook computer. And FA Communications Software can be used to access PLC data by using only tag names to enable more flexible and higher-speed access of PLC data from personal computers, and that lowers costs by eliminating the need for a special board for data links.

Windows 8.1 (32bit / 64bit version *) / Visual Studio 2013 (32bit/64bit version *) supported

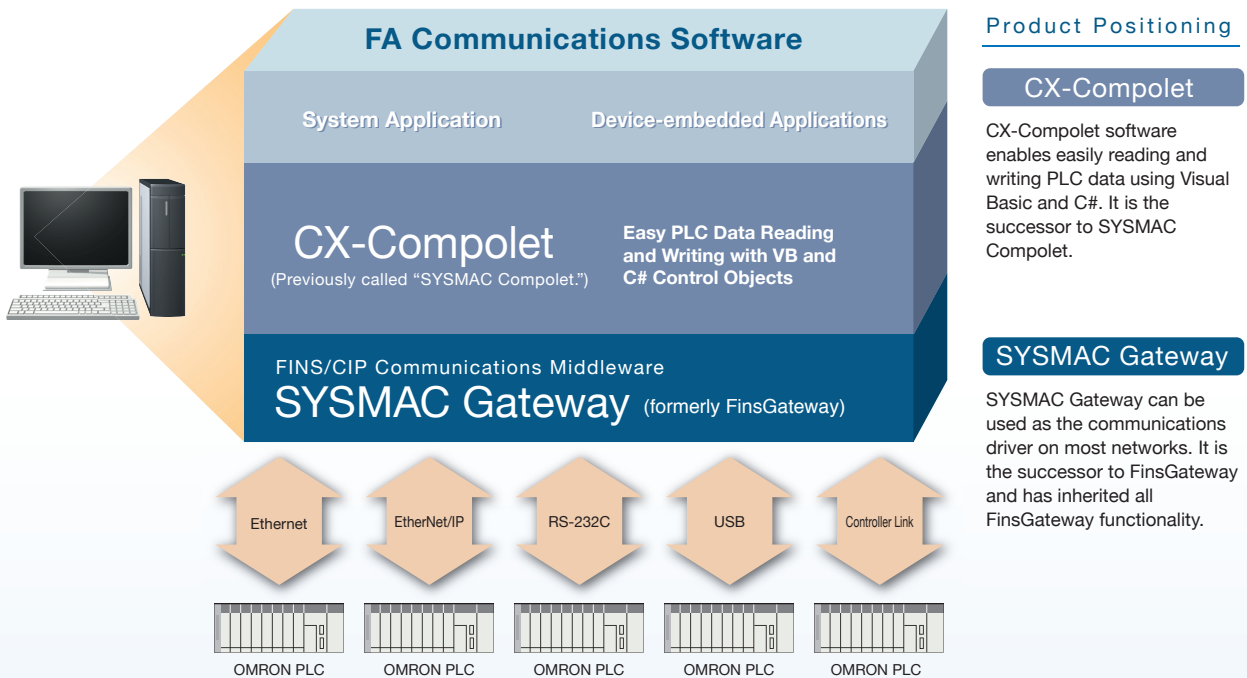

* This software runs on WOW64 (Windows-On-Windows 64). Customer application must be run as 32bit process.





Sysmac is a trademark or registered trademark of OMRON Corporation in Japan and other countries for OMRON factory automation products. Microsoft, Visual Basic, Visual Studio, ActiveX and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

Microsoft product screen shots reprinted with permission from Microsoft Corporation.

iPhone and iPad are registered trademarks of Apple Inc.

Other company names and product names in this document are the trademarks or registered trademarks of their respective companies.

Lets You Create Applications with Flexible, to PLCs from Personal Computers.

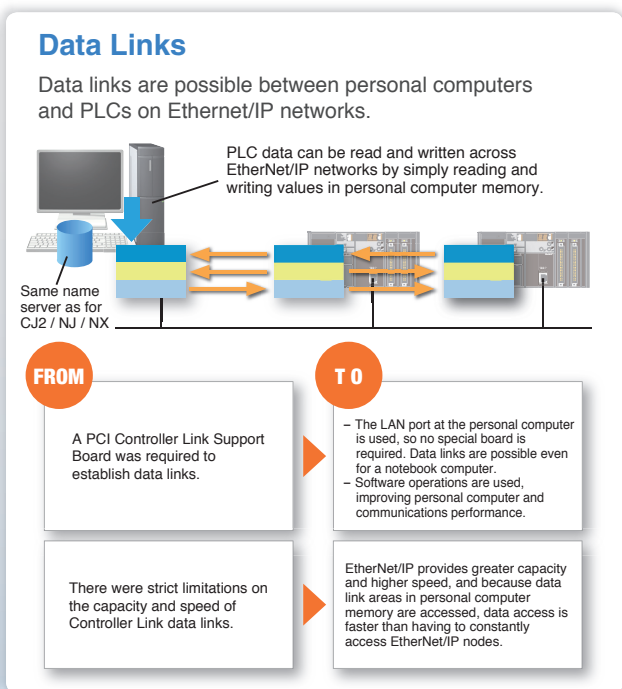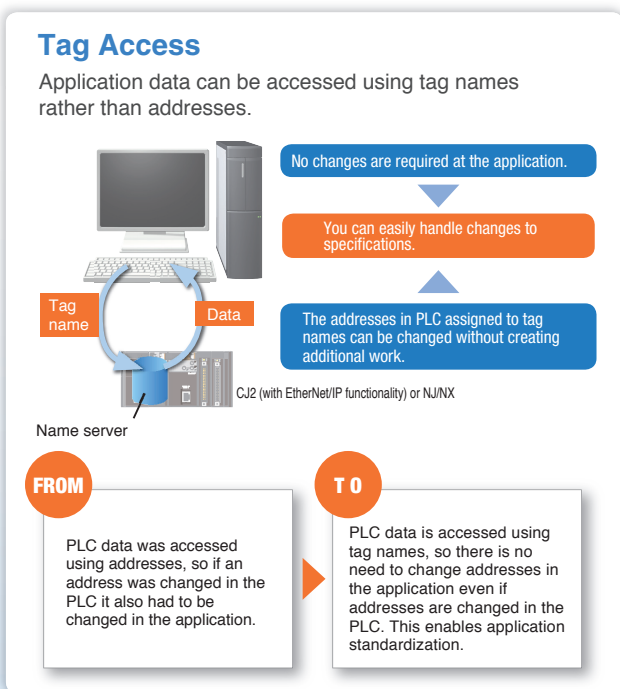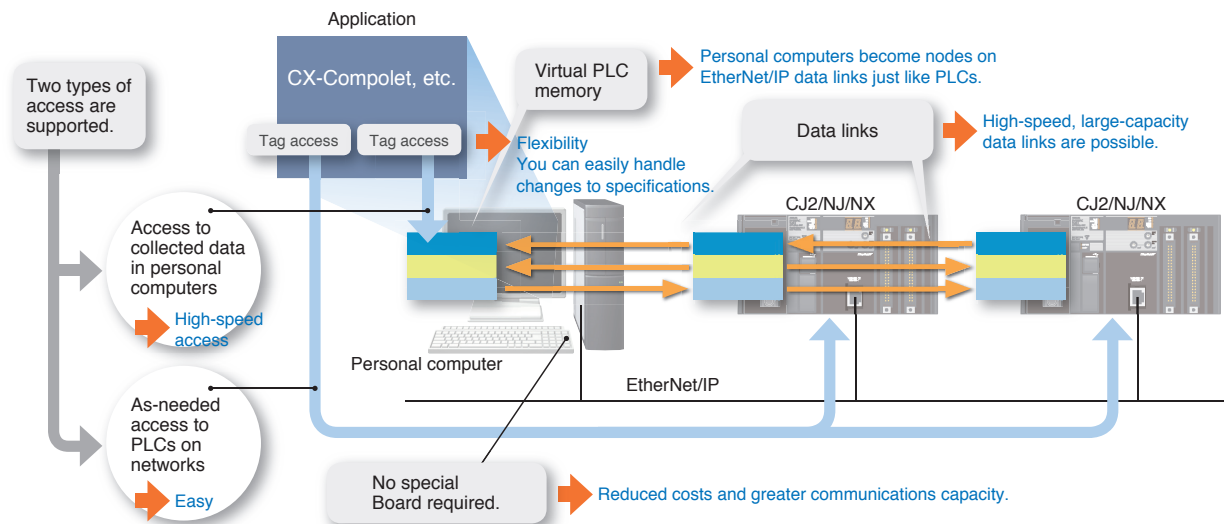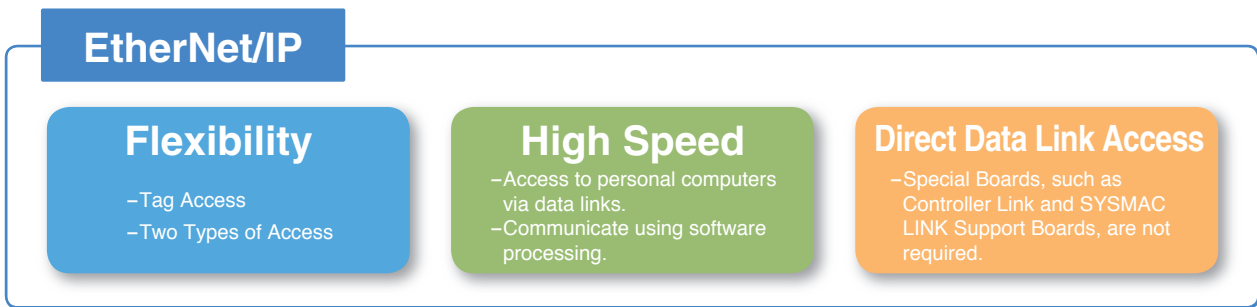

Note: The Network Configurator included in the CX-One Package or Sysmac Studio is required to set tag data links. Tag access is available with CJ2-series and NJ/NX-series CPU Units with EtherNet/IP functionality.


Easily Create Programming to Read and Write PLC Data using VB or C#.

CX-Compolet

.NET Control Objects ActiveX Control Objects are also included.

CX-Compolet is a package of software components that make it easy to program reading and writing OMRON PLC data.

- Read and write I/O memory in the PLC, change the operating mode, read error logs, and perform other operations.
- Supports Microsoft Visual Studio 2005/ 2008/ 2010/ 2012/2013.
- For the CJ2 (with EtherNet/IP functionality) or NJ/NX, I/O memory in the PLC can be accessed by using tag names rather than addresses.
- Array and structure variable access is possible.
- Read and write variables corresponding to the data types of CIP that conform to ODVA specifications.

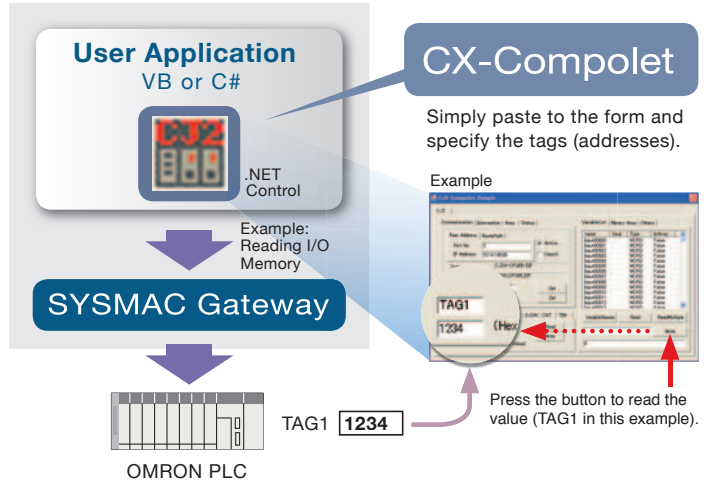


Situation → Creating and Modifying VB/C# Communications Programming Is Too Much Work

Problem		Solution	
Customers who are developing VB/C# applications including communications with PLCs	Having to program communications frame assembly, reception response interpretation, and monitoring is too much work.	▶	Processing such as communications frame assembly is prepared in advance.
	Having to change communications processing, e.g., for Ethernet and serial communications, is too much work.	▶	Data is accessed by using tag names rather than by using addresses, so programming does not have to be changed even if PLC addresses are changed. *
	Handling PLC address changes is particularly time consuming.	▶	Array variables are supported, so data can be easily specified by simply changing the element subscript with the same tag name. *
	For a block of data of the same data type, it is too much work to have to specify the addresses one by one rather than being able to view them as one group and access that data as an element.	▶	

* When combined with the CJ2 (with EtherNet/IP functionality) or NJ/NX.

Procedure


Simply Paste to a Form and Enter a Line of Code.

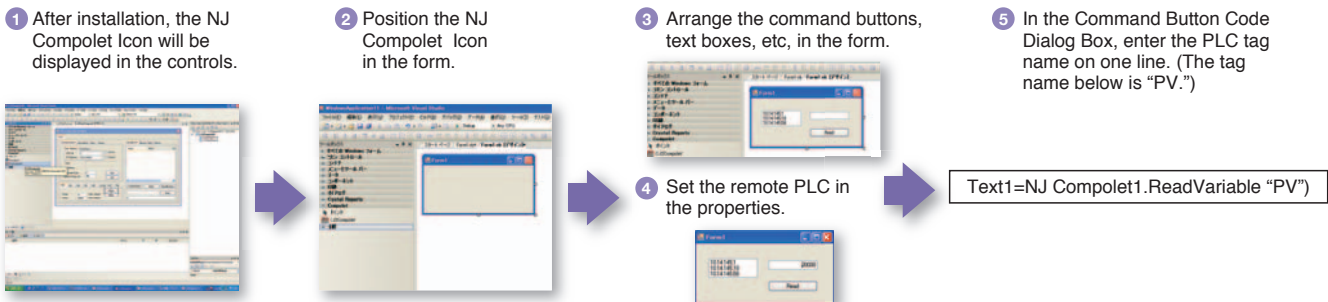

Application Example

Easily Program Device Alarm Monitoring.

- Using the control components provided by CX-Compolet frees the application designers from having to program the communications portions of the application.
- Data for device alarms and other data are sent to the applications using non-solicited EtherNet/IP communications events.
- Standardization is made easy by specifying data using tag names (such as "Alarm A" and "Alarm B") in the applications.

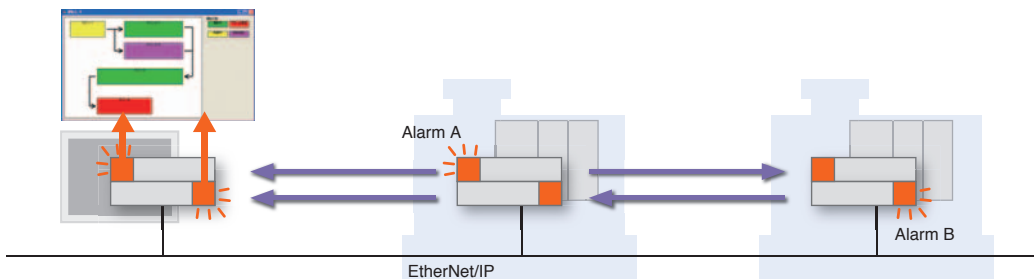

Main CX-Compolet Functions

Interface	Function	Description
Properties	Communications with OMRON PLCs	Specifies the PLC to communicate with, and reads network information.
	Reading and writing I/O memory	Read and writes data in memory areas, such as the DM Area or CIO Area. For example, DM word 100 can be specified by using "D100" or by using a tag name.
	Operating status	Reads and changes the operating mode.
	Area information	Reads information such as the program area size and number of DM Area words.
	Error information	Reads the value and error message when an error occurs.
	Other OMRON PLC information	Reads the model and reads and changes the clock.
	Getting tag information	Gets the NJ/NX-series / CJ2 (with EtherNet/IP functionality) tag name list.
Methods	Reading and writing I/O memory	Reads and writes memory, such as consecutive words in the DM Area or CIO Area. For example, it is possible to specify the data type (integer, single, etc.) or change the data type (BCD, BIN, SBIN).
	Creating I/O tables	Creates the I/O tables for the present configuration.
	Force-setting, force-resetting and clearing bits	Force-sets, force-resets, and clears bits.
	Communications with OMRON PLCs	Specifies the PLC to communicate with.
	FINS service execution	Sends FINS commands and gets the responses that are received.
Events	Uploads the event log from the PLC *	Uploads the specified category of the event log from the PLC. The date/time and type (system event, access event, or user-defined event) of the past errors stored in the PLC can be uploaded collectively or by category.
	Scheduled events	Events occur at regular intervals.

* Supported only by the NJ/NX-series Machine Automation Controllers.
 The event log of the Communications Coupler Units, NX Units, EtherCAT slaves, or CJ-series Units cannot be uploaded.
 Refer to the Troubleshooting Manuals of the CPU Units for details of the event log.


An OMRON PLC Driver with Virtual PLC Memory Functionality

SYSMAC Gateway

Communications Driver and Virtual PLC Memory

SYSMAC Gateway provides an OMRON PLC communications driver and virtual memory. OMRON's FA Communications Software uses the SYSMAC Gateway communications middleware as a common platform.

- In addition to FINS communications, operation of SYSMAC Gateway has been verified on EtherNet/IP.
- Virtual PLC event memory is provided to enable a personal computer to participate as a data link node.
- Changes to memory can be detected in applications at the personal computer.
- The status of SYSMAC Gateway (EtherNet/IP communications) can be checked in task tray.

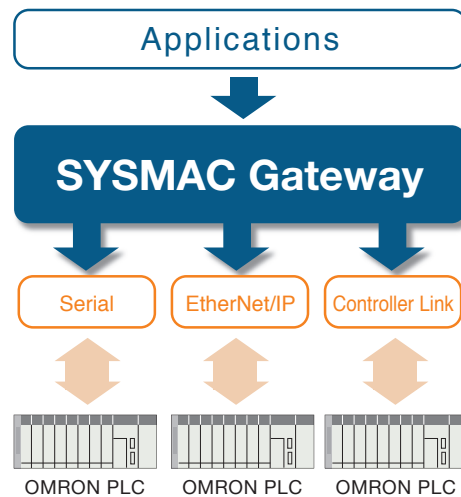

Note: Communications are possible via USB and Ethernet too.

Situation → Developing or Modifying PLC Applications Is Too Much Work

Problem	
Customers who have created their own communications programs	<p>Modifying programs for different networks is a lot of work.</p>
Customers who are already using FinsGateway	<p>–Insufficient speed. –Insufficient data link capacity.</p>
	<p>Programming communications to send and receive messages for each node or block of data is too much work.</p>
Customers who want to standardize personal computer applications	<p>Having to modify personal computer applications whenever the PLC memory map is changed is too much work.</p>

Solution	
Time spent on programming communications can be reduced by absorbing the differences between networks.	<p>Network differences are absorbed.</p>
Using EtherNet/IP enables high-speed, large-capacity data links with no need for a special communications board.	<p>Large capacity</p> <p>Fast</p>
Communications efficiency can be optimized by using EtherNet/IP data links.	<p>Notification of changes is sent.</p> <p>No special board is required.</p> <p>High-speed, large-capacity data links</p>
For the CJ2 (with EtherNet/IP functionality) or NJ/NX, tag access and tag data links (*1) provide freedom from PLC memory maps.	<p>Personal computer applications do not need to be modified.</p> <p>Even when the PLC memory map is changed.</p>

*1. Tag data links are not possible from a C language library. They are possible only with .NET.

Task Tray Notification and Troubleshooter

Statuses of EtherNet/IP communications (network, tags, operation history) are displayed.


Event Log Utility

This utility provides the functionality to upload and display the event log information recorded in the NJ/NX-series Machine Automation Controllers.

Application Example

Using Events to Provide Notification of Changes in Data

- The application is notified using events only when preset conditions are met.
- Eliminating programming for checking cyclic data changes reduces the load on the personal computer processor.
- Notification of data changes is provided immediately, eliminating wasted communications time.

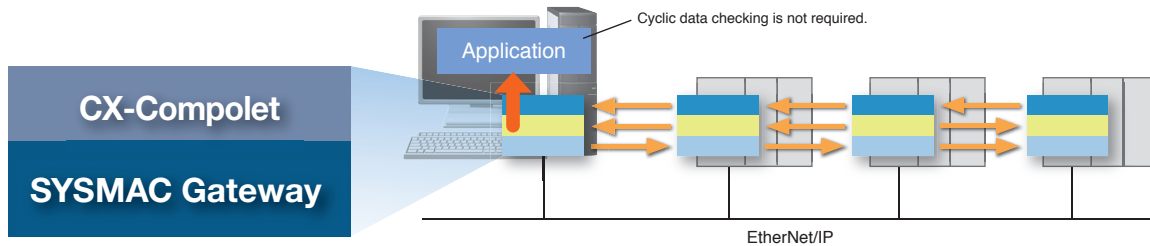

Main SYSMAC Gateway Functions

Item	Description
Supported protocols	SYSWAY, SYSWAY-CV, Peripheral Bus (Toolbus), FINS, and CIP
Supported PLCs	NX, NJ, CJ2, CJ1, CS1, CP1, C, and CVM1 / CV
Supported networks	Ethernet (FINS, Data link), EtherNet/IP (CIP, Data link), RS-232C (SYSWAY, SYSWAY-CV, Data link), USB, Controller Link (FINS, Data link), and SYSMAC LINK (FINS)
Virtual event memory	CIO, Auxiliary (A), Holding (H), Work (W), DM, and EM1 to EM1F
Tag access	For the CJ2 (with EtherNet/IP functionality) or NJ/NX, access by tag name is enabled.

CIP Service Specifications

Item	Description	
Tag data links*1	Number of connections	384
	Allowable communications bandwidth	5,000pps*2
	Refresh period (RPI)	1 to 10,000ms (unit:1ms)*3
	Link data capacity	184, 832words max.
Explicit messages	Data size per connection	722words (1,444bytes) max.
	Message send function (client)	CIP connectionless (UCMM) and CIP connection (Class 3) communications
	Message receive function (server)	CIP connectionless (UCMM) and CIP connection (Class 3) communications
	Data size	502bytes
	CIP routing	Not supported.

- *1. Tag data links between SYSMAC Gateway and the NJ/NX-series CPU Unit can be created within the CJ-series specifications for variable with basic data type, array variable, and structure variable. SYSMAC Gateway memory allocation of structure variable is the same as the CJ-series.
- *2. Reference value. The performance depend on your personal computer and the execution status of Windows applications.
- *3. The RPIs that can be set depend on the number of connections.

The Main APIs You Can Set with the SDK

CIP Communication

Basic operation	
CIPApp_openConnectionExplicit	Opens an explicit message connection (Class3/UCMM).
CIPApp_closeConnectionExplicit	Closes the explicit message connection.
CIPApp_sendRequestExplicit	Sends an explicit message.
CIPApp_receiveExplicit	Receives an explicit message.

Operation to manipulate send / receive data	
CIPUtil_constructNetworkPath	Constructs the Network Path for the explicit message to send.
CIPUtil_constructRequestPathWithCIA	Constructs the RequestPath for the explicit message to send, with class / instance / attributeID.
CIPUtil_constructRequestPathWithTagName	Constructs the RequestPath for the explicit message to send, with a tag name.

Getting internal information	
CIPPort_getStatus	Gets the network port status.
CIPPort_getConnectionStatus	Gets the datalink connection status.

Note: There are 12 other APIs.

Fins Communication

Basic operation	
Fins_sendData	Sends a FINS message.
Fins_receiveData	Receives a FINS message.

Getting internal information	
Fins_getNetworkInfo	Gets the network information.

Operation to manipulate send / receive data	
FinsHead_compose	Constructs the FINS message header.
FinsHead_composeResponse	Constructs the FINS response header.

Note: There are 13 other APIs.

Datalink / Event memory access

Memory read / write	
Em_readMemory	Reads data from event memory.
Em_writeMemory	Writes data to event memory.


event send / receive	
Em_sendEvent	Sends events.
Em_receiveEvent	Receives events.

Setting or clearing message-driven event reception	
Em_setCondition	Sets normal event-occurrence condition.
Em_clearCondition	Clears normal or wide-area event-occurrence condition.


Getting internal information	
Em_getConditionList	Gets the setting list of normal event conditions.

Note: There are 30 other APIs.

CX-Compolet and SYSMAC Gateway can access the PLCs in the following configurations.

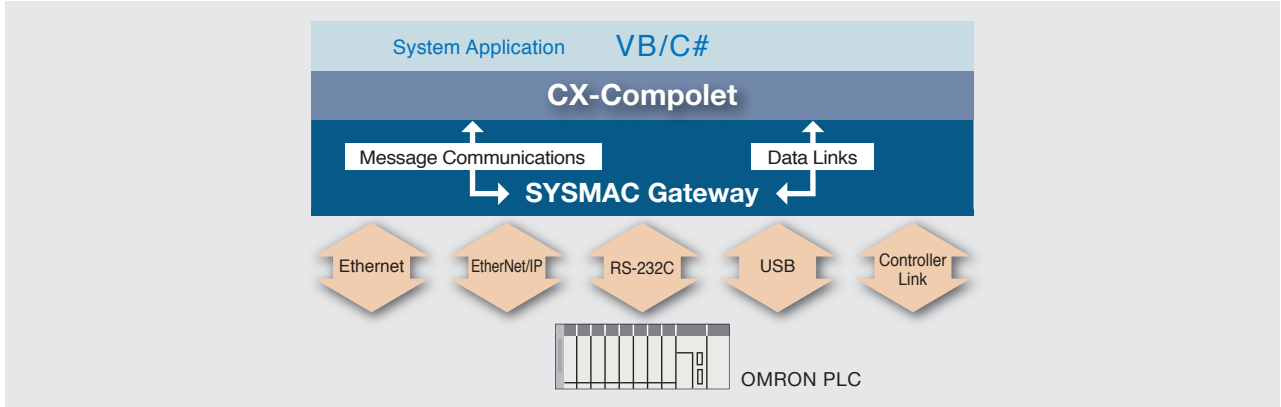


EtherNet/IP

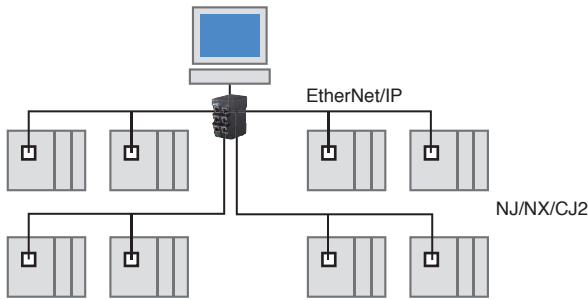

For systems linked with databases, the NJ-series Database Connection CPU Unit (NJ501-1□20) is available. Please contact your OMRON sales representative for details.


USB

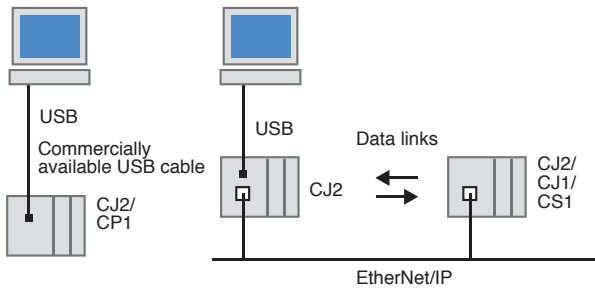


Ethernet (FINS)



RS-232C

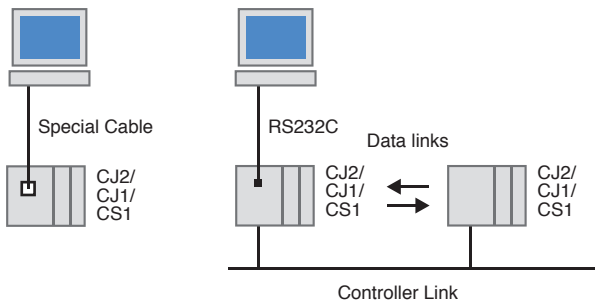


Controller Link

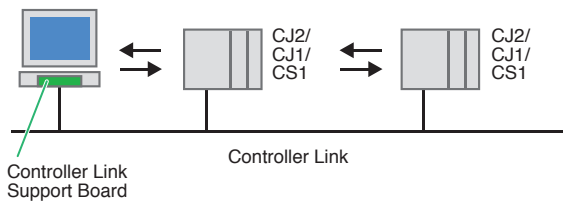


Note: The above configurations are only examples. Communications are also possible with PLCs other than those shown here. For details, refer to Correspondence between Main PLC Models and Connected Networks.

- No special hardware for control network is required.

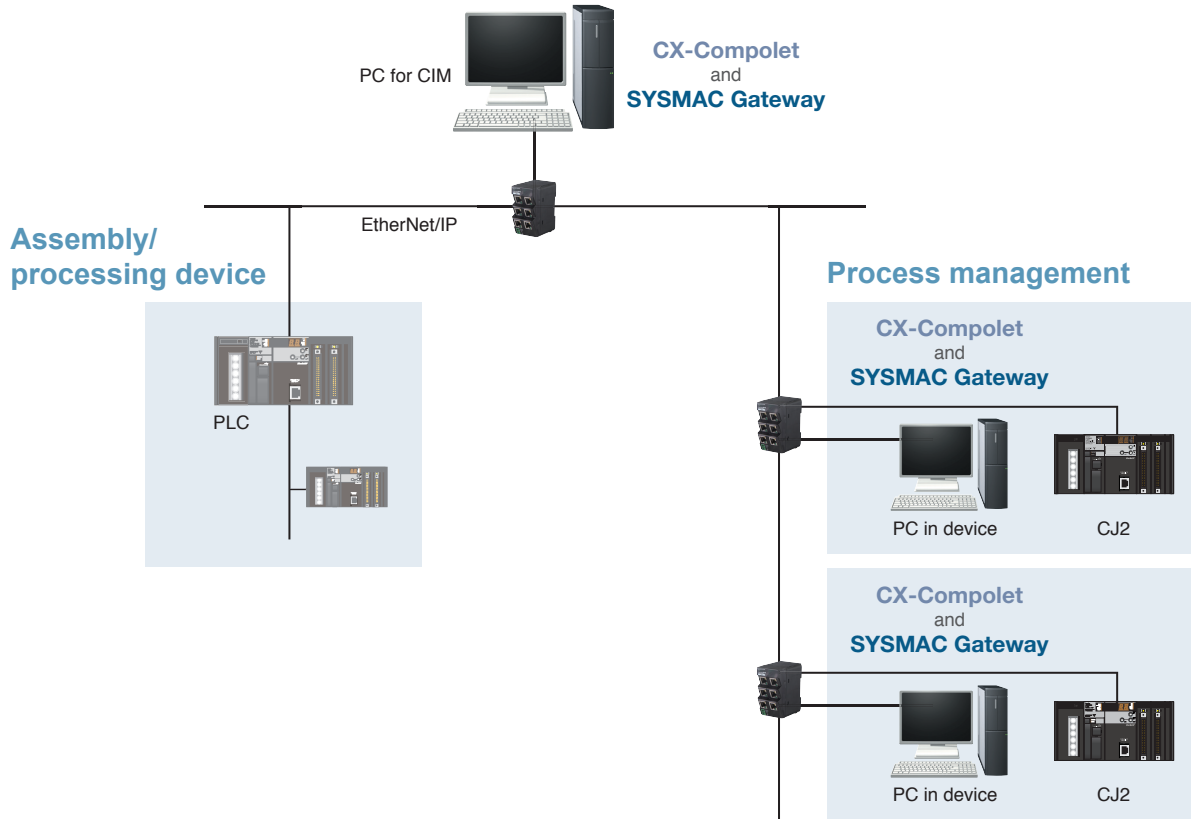

- You can operate easily with a notebook computer because of EtherNet/IP data link communications without special hardware.

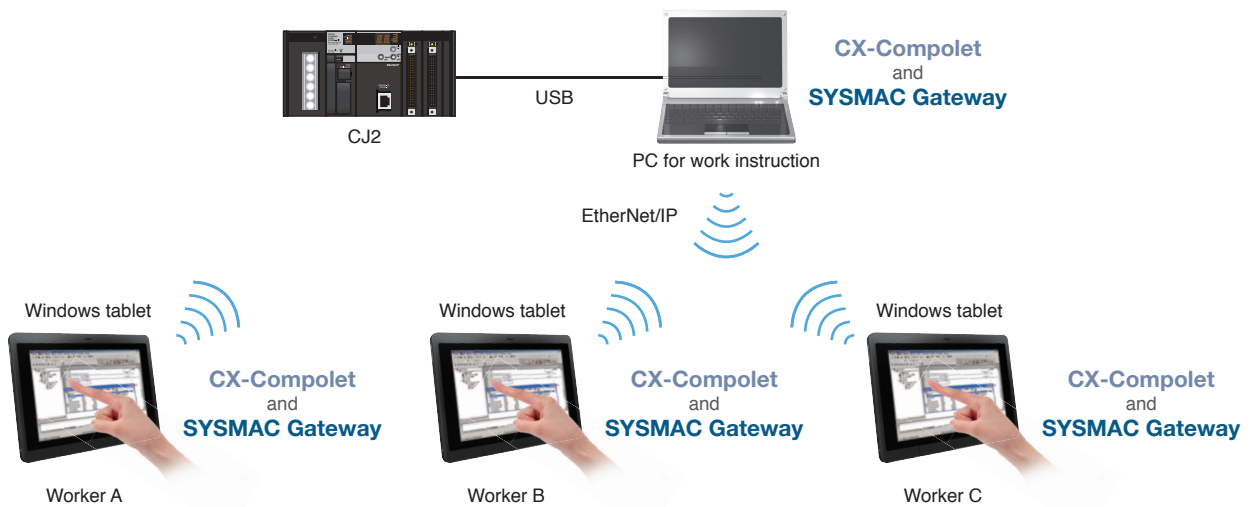

Note: The above configurations are application examples. Make sure that you read the online help in the setup disk and check the operating conditions on site before using.

Ordering Information

CX-Compolet

Product name	Specification	Model	Standards
CX-Compolet*	Software components that can make it easy to create programs for communications between a computer and controllers. This packaged product bundles CX-Compolet and SYSMAC Gateway with 1 license each. Supported execution environment: .NET Framework (2.0, 3.0, 3.5, 4.0 or 4.5.1) Development environment: Visual Studio 2005/2008/2010/2012/2013 Development languages: Visual Basic, C# Supported communications: Equal to SYSMAC Gateway.	CX-COMPOLET-EV1-01L	-
	3 additional licenses (This product provides only additional licenses. The software must be purchased in advance.)	WS02-CPLC1-L3	
	5 additional licenses (This product provides only additional licenses. The software must be purchased in advance.)	CX-COMPOLET-EV1-05L	
	10 additional licenses (This product provides only additional licenses. The software must be purchased in advance.)	CX-COMPOLET-EV1-10L	

* One license is required per computer. Note 1: When .NET Framework version 1.1 (Visual Studio 2003) is used for development, only the specifications of CX-Compolet version 1.5 are available.

SYSMAC Gateway (Communications Middleware)

Product name	Specification	Model	Standards
SYSMAC Gateway*1	Communications middleware for personal computers running Windows. Supports CIP communications and tag data links (EtherNet/IP) in addition to FinsGateway functions. This package includes SYSMAC Gateway with 1 licence. (Fins Gateway is also included.) Supported communications: RS-232C, USB,	SYSMAC-GATEWAY-RUN-V1	-

*1. One license is required per computer.
Please purchase SYSMAC Gateway when execution environment is required.

System Requirements (CX-Compolet / SYSMAC Gateway)

Item	Requirement						
Operating system (OS) Japanese or English system	Microsoft Windows XP SP3 (32bit)	Microsoft Windows Server 2003 (32bit)	Microsoft Windows Vista (32bit)	Microsoft Windows 7 (32bit/64bit*)	Microsoft Windows Server 2008 (32bit/64bit*) or Microsoft Windows Server 2008 R2 (64bit*)	Microsoft Windows Server 2012 (64bit*) or Microsoft Windows Server 2012 R2 (64bit*)	Microsoft Windows 8 (32bit/64bit*) or Microsoft Windows 8.1 (32bit/64bit*)
Personal compute	Windows computers with Intel x86 processor			Windows computers with Intel 32bit (x86) processor or 64bit (x64) -based processor			
Hard disk	At least 400 MB of available space						

* This software runs on WOW64 (Windows-On-Windows 64). Customer application must be run as 32bit process.
Note 1: USB Port on the PC can not be shared between SYSMAC Gateway and CX-One in Windows Vista or higher.
Note 2: System requirements for Windows computers are the same as those recommended by Microsoft.
Note 3: The compatible functions of SYSMAC Compolet V2 are supported by Windows XP only.

Correspondence between Main PLC Models and Connected Networks

Personal computer		RS-232C				USB	Ethernet (LAN)		Controller Link
		SYSWAY (Host Link C Mode)	SYSWAY-CV (Host Link FINS)	CompoWay/F (master at personal computer)	Peripheral Bus		FINS	Ethernet (FINS)	
PLC									
NX7/NJ1 (unit version 1.10 or later)*1 NJ5/NJ3 (unit version 1.03 or later)*2		No	No	No	No	No	No	Yes *3	No
CJ2 with EtherNet/IP functionality		Yes	Yes	No	Yes (Peripheral Bus – CS/CJ)	Yes	Yes	Yes (Specification using tag names is possible.)	Yes *4
CJ1		Yes	Yes	No	Yes (Peripheral Bus – CS/CJ)	No	Yes *4 (Communications Units are not required for CJ1M PLCs with Ethernet functionality.)	Yes *4, *5	Yes *4
CS1		Yes	Yes	No	Yes (Peripheral Bus – CS/CJ)	No	Yes *4	Yes *4, *5	Yes *4
CP1		Yes *6	Yes *6	No	Yes *6 (Peripheral Bus – CS/CJ)	Yes	Yes *7	No	Yes *4 (CP1H only)
C Series	C200HX/HG/HE, CQM1H	Yes	No	No	Yes (Peripheral Bus – C)	No	No	No	Yes *4
	CPM1/CPM2	Yes	No	No	Yes (Peripheral Bus – C)	No	No	No	No
CVM1/CV		Yes	Yes	No	Yes (Peripheral Bus – CV)	No	Yes *4	No	Yes *4
CompoWay/F Slaves, such as Temperature Controllers		No	No	Yes	No	No	No	No	No

Note: Including models whose production were discontinued.

*1. To connect the NX7/NJ1 Controller, CX-Compolet / SYSMAC Gateway version 1.70 or higher is required. *2. To connect the NJ3/5 Controller, CX-Compolet / SYSMAC Gateway version 1.31 or higher is required. *3. Tag data links between SYSMAC Gateway and the NJ/NX-series CPU Unit can be created within the CJ-series specifications for variable with basic data type, array variable, and structure variable. SYSMAC Gateway memory allocation of structure variable is the same as the CJ-series. *4. A separate Communications Unit is required. *5. Specification using tag names is not possible. *6. It cannot be used for CP1E E-type. *7. The CP1W-CIF41 is required for the CP1H / CP1L other than CP1L-EM/EL. The CP1W-CIF41 version 2.0 or later is required for the CP1E N-type. It cannot be used for CP1E E-type. Yes : Supported, No : Not Supported

Correspondence between supported OS and Development environment & CX-Compolet / SYSMAC Gateway

			Supported CX-Compolet/SYSMAC Gateway	
Supported OS	Client	Windows XP (32bit)	Ver.1.00 or higher	
		Windows Vista (32bit)	Ver.1.00 or higher	
		Windows 7 (32bit)	Ver.1.10 or higher	
		Windows 7 (64bit)	Ver.1.20 or higher	
		Windows 8 (32bit/64bit)	Ver.1.50 or higher	
		Windows 8.1 (32bit/64bit)	Ver.1.40 or higher	
	Server	Windows Server 2003 (32bit)	Ver.1.00 or higher	
		Windows Server 2008 (32bit)	Ver.1.10 or higher	
		Windows Server 2008/R2 (64bit)	Ver.1.20 or higher	
		Windows Server 2012/R2 (64bit)	Ver.1.50 or higher	
Development environment	Visual Studio 2005		Ver.1.00 or higher	
	Visual Studio 2008		Ver.1.00 or higher	
	Visual Studio 2010		Ver.1.10 or higher	
	Visual Studio 2012		Ver.1.50 or higher	
	Visual Studio 2013		Ver.1.40 or higher	

Note1: From SYSMAC Gateway version 1.31, the unit revision has been changed to revision 2. When EtherNet/IP tag data links are set for SYSMAC Gateway unit revision 1 (SYSMAC Gateway version 1.2 or lower), the settings need to be changed to revision 2 with Network Configurator for EtherNet/IP. 2: When EtherNet/IP tag data links are set to use SYSMAC Gateway unit revision 2 (version 1.31 or higher) as a node, Network Configurator for EtherNet/IP version 3.50 or higher is required. (Network Configurator for EtherNet/IP is included in CX-Compolet WS02-CPLC1 version 1.31 or higher. SYSMAC Gateway WS02-SGWC1 version 1.31 or higher. Sysmac Studio version 1.00 or higher. CX-One version 4.24 and CX-One auto update (February 2012 or later)

Correspondence between supported OS & Connected Networks

			Ethernet		RS-232C	USB	Controller Link		SYSMAC LINK
			Ethernet (FINS)	EtherNet/IP			PCI	ISA	
Supported OS	Client	Windows XP (32bit)	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Windows Vista (32bit)	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Windows 7 (32bit)	Yes	Yes	Yes	Yes	Yes	No	No
		Windows 7 (64bit)					No		
		Windows 8 (32bit/64bit)	Yes	Yes	Yes	Yes	No	No	No
		Windows 8.1 (32bit/64bit)	Yes	Yes	Yes	Yes	No	No	No
	Server	Windows Server 2003 (32bit)	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Windows Server 2008 (32bit)	Yes	Yes	Yes	Yes	Yes	No	No
		Windows Server 2008/R2 (64bit)					No		
		Windows Server 2012/R2(64bit)	Yes	Yes	Yes	Yes	No	No	No

Yes : Supported, No : Not Supported

Would you like to know more?

OMRON EUROPE

 +31 (0) 23 568 13 00

 industrial.omron.eu

 omron.me/socialmedia_eu

Sales & Support Offices

Austria

Tel: +43 (0) 2236 377 800
industrial.omron.at

Belgium

Tel: +32 (0) 2 466 24 80
industrial.omron.be

Czech Republic

Tel: +420 234 602 602
industrial.omron.cz

Denmark

Tel: +45 43 44 00 11
industrial.omron.dk

Finland

Tel: +358 (0) 207 464 200
industrial.omron.fi

France

Tel: +33 (0) 1 56 63 70 00
industrial.omron.fr

Germany

Tel: +49 (0) 2173 680 00
industrial.omron.de

Hungary

Tel: +36 1 399 30 50
industrial.omron.hu

Italy

Tel: +39 02 326 81
industrial.omron.it

Netherlands

Tel: +31 (0) 23 568 11 00
industrial.omron.nl

Norway

Tel: +47 (0) 22 65 75 00
industrial.omron.no

Poland

Tel: +48 22 458 66 66
industrial.omron.pl

Portugal

Tel: +351 21 942 94 00
industrial.omron.pt

Russia

Tel: +7 495 648 94 50
industrial.omron.ru

South Africa

Tel: +27 (0)11 579 2600
industrial.omron.co.za

Spain

Tel: +34 902 100 221
industrial.omron.es

Sweden

Tel: +46 (0) 8 632 35 00
industrial.omron.se

Switzerland

Tel: +41 (0) 41 748 13 13
industrial.omron.ch

Turkey

Tel: +90 212 467 30 00
industrial.omron.com.tr

United Kingdom

Tel: +44 (0) 1908 258 258
industrial.omron.co.uk

More Omron representatives

industrial.omron.eu